

Owner's Manual

RZ450e

©2024 TOYOTA MOTOR CORPORATION
All rights reserved. This material may not be reproduced or copied, in whole or in part,
without the written permission of Toyota Motor Corporation.

Before driving	Important points to know before driving the vehicle	1
Driving the vehicle	Basic operations for when driving the vehicle	2
Driving according to the conditions	Driving when the surrounding area is dark, or in rainy or cold weather	3
Interior features	Using the air conditioning system and interior convenience features	4
Vehicle status information and indicators	Reading driving-related information	5
Driving support system	Safe driving support function and SRS airbag settings	6
Wireless communication	Wireless communication services which support safety, comfort and convenience	7
Maintenance and care	Caring for your vehicle and maintenance procedures	8
When trouble arises	What to do in case of malfunction and emergency	9
Vehicle specifications	Vehicle specifications, customizable features	10
Index	Search alphabetically	

For your information

For your information 8
Pictorial index 12

1 Before driving

1-1. Using the dedicated floor mats

Using the dedicated floor mats correctly 22

1-2. Important points for the EV system

Electric vehicle system features 24
Electric Vehicle system precautions 27
Battery Electric Vehicle driving tips 33
Driving range 35

1-3. Charging with the EV system

Charging equipment 36
Locking and unlocking AC charging connector 40
Charging methods 42
Charging tips 45
Things to know before charging 47
How to use AC charging 51
How to use DC charging 58
Using the charging schedule function 64
Using My Room Mode 71

1-4. For safe driving with children on board

Riding with children 73
Child restraint systems 75

1-5. Entering/exiting the vehicle

Key types 90
Smart entry & start system 94
Opening/closing the doors 99
Locking/unlocking the doors 102
Immobilizer system 105
Alarm 106
Trailer towing (vehicles with towing package) 112
Trailer towing (vehicles without towing package) 119
Opening and closing the windows 120

1-6. Loading luggage

Loading the vehicle with luggage 124

1-7. Obtaining the correct driving posture

Adjusting the seats 146
Using the seat belts 150
Adjusting the position of the steering wheel and mirrors 154

2 Driving the vehicle

2-1. Starting and stopping the EV system

Starting the EV system 168
Stopping the EV system 172

2-2. Driving procedures

Driving procedure 173
Breaking in your new Lexus 176
Intended use of each shift position 177
Changing the shift position 178

Starting off 184
Informing the driver of the vehicle's dynamic conditions through sounds 185
Operations when turning left or right or changing lanes 186
Changing the regenerative braking power 187

2-3. Parking the vehicle

When parking the vehicle 188
Stopping 189
Parking the vehicle 190

3 Driving according to the conditions

3-1. Driving when the surrounding area is dark

Using the headlights 196
Automatically changing between the low beam headlights and high beam headlights 200

3-2. Driving when the surrounding area is bright

Using the sun visors 208
Inside rear view mirror anti-glare function (vehicles with auto anti-glare inside rear view mirror) 209
Digital Rearview Mirror anti-glare function (optical mirror mode) 210

3-3. Driving in the rain

Precautions for driving in the rain 211
Ensuring visibility in the rain 212

3-4. Driving when the windows or mirrors are fogged up

Defog the windshield 216
Defog the rear window 217
Defog the outside rear view mirrors 218

3-5. Driving when it is cold

Preparing for cold weather 219
Cold weather driving tips 222

3-6. Driving in low visibility conditions

Multi Weather Lights illumination 224
Rear fog lights illumination 225
Sounding the horn 227

3-7. Utility vehicle precautions

Utility vehicle precautions 228

3-8. Changing the driving characteristics

Driving modes 231
Changing the driving mode 233

3-9. Brake hold system

Brake hold system 234

4 Interior features

4-1. Favorite settings

My Settings 238

4-2. Adjusting the preferred driving position

Enabling easier driver entry and exit (Power easy access system) 240
Driving position registration/recall/deletion 241

4-3. Adjusting the temperature/environment inside the vehicle

Comfortable condition to be maintained without adjusting each system (Lexus Climate Concierge) 246

Air conditioning controls 248

Heated steering wheel 258

Seat heaters/Radiant heaters. 259

Seat ventilators 262

Using the panoramic fixed moon roof with one-touch frosted glass control 263

4-4. Illuminating the interior

Using the interior lights 269

4-5. Using the interior features

Location of the storage features 273

Convenient interior features... 278

4-6. Using the luggage compartment

Using the cargo hooks 290

Using the cargo net hooks 291

Using the grocery bag hooks. 292

Deck board 293

Stowing the luggage cover 295

5 Vehicle status information and indicators

5-1. Functions and displays of the meter

Warning lights and indicators. 298

Gauges and meters 304

5-2. Functions of the displays

Multi-information display (vehicles without a head-up display) 310

Multi-information display (vehicles with a head-up display) 312

Head-up display 314

Displayed content 316

5-3. Changing the settings of the displays

Changing the instrument panel light brightness 325

Changing settings for the head-up display 326

6 Driving support system

6-1. Features of the safe driving support functions

Driving assist systems 330

Lexus Safety System + ... 338

Driver monitor 348

6-2. Using the safe driving support functions

Pre-Collision System 351

Lane Tracing Assist 365

Lane Departure Alert 370

Road Sign Assist 376

Dynamic radar cruise control. 379

Cruise Control 394

Emergency Driving Stop System 400

Blind Spot Monitor 403

Safe Exit Assist 409

Lexus parking assist-sensor 415

Rear Cross Traffic Alert 425

RCD (Rear camera detection) 432

PKSB (Parking support brake) 438
Lexus Teammate Advanced Park 452
EV system output restriction when the accelerator pedal and brake pedal are depressed at the same time 484
Sudden start restraint control 485

6-3. Reducing impact to the occupants in a collision

Reducing impact to passengers in a collision 486

7 Wireless communication

7-1. Emergency assistance

Lexus Connected Services 496

8 Maintenance and care

8-1. Exterior maintenance and care

Washing the vehicle 502

8-2. Cleaning and protecting the vehicle interior

Cleaning the vehicle interior 508
Cleaning the synthetic leather areas 510

8-3. Maintenance

Maintenance requirements 511
Scheduled maintenance outline 512
Do-it-yourself maintenance 513

8-4. Inspection of consumables

Do-it-yourself service precautions 514
Opening the hood 517
Motor compartment 519
Adding washer fluid 526
Air conditioning filter maintenance 527

8-5. Tire maintenance

Tire maintenance 531
Tire inspection items 532
Operation of the tire pressure warning system 534
Checking tire inflation pressure 545
Lifting the vehicle with a floor jack 547
Rotating the tires 548
Wheels 549
Replacing the tire 551

9 When trouble arises

9-1. What to do if a problem occurs while driving

What to do if a problem occurs while driving 563

9-2. If a warning is indicated on the meter

If a warning light turns on/flashes 567
If a warning message is displayed 577

9-3. If the EV system will not start

When the EV system cannot be started even though the correct starting procedure is being followed 594
When the interior lights or headlights are dim and the

EV system cannot be started 597

When the interior lights or headlights do not illuminate and the EV system cannot be started 603

When the horn sounds at a low volume and the EV system cannot be started 604

When the horn does not sound and the EV system cannot be started 605

9-4. If a tire is flat

Repairing a tire with the emergency tire puncture repair kit 606

9-5. If a door cannot be opened or locked

If a key has been lost 618

When the doors/windows cannot be operated using an electronic key 619

If a door cannot be opened using the door opener switch 628

If the rear doors cannot be opened from the inside 631

If the back door cannot be opened 632

9-6. If the EV system cannot be used normally

If the charging port lid cannot be opened 633

If AC charging cannot be performed normally 634

If DC charging cannot be performed normally 636

If the charging connector cannot be disconnected from the charging inlet 639

If the charging schedule function does not operate normally 640

9-7. If an indicator on an interior feature illuminates or flashes

When the wireless charger operation indicator light (on the charging tray) flashes 642

9-8. If the vehicle cannot move

When a EV system warning message is displayed and the vehicle does not move 644

If the transmission makes abnormal sounds 645

Towing with a tow truck 646

Using a flatbed truck 648

Towing with another vehicle 649

Getting unstuck from mud, sand, or snow 652

9-9. If you think something is wrong

If a vehicle abnormality is found 653

If abnormal sounds are emitted from the vehicle 654

If the vehicle behaves abnormally 655

9-10. Items to check before contacting a dealership

The steering wheel cannot be turned after the EV system is stopped 656

If the windows do not open or close by operating the power window switches..... 657
The power switch is turned off automatically 658
If your vehicle overheats..... 659
If electrical components cannot be used or do not operate when a switch is operated 662
If a light does not illuminate..... 663

10 Vehicle specifications

10-1. Specifications
Maintenance data..... 668

10-2. Customizable features
User customization function outline 674
Method to change settings 675
Customizable features 676

10-3. Initialization
Items to initialize 692

Supplement..... 693
Index..... 698
Certifications..... 710

For your information

Information contained in this Owner's Manual

Please note that this manual applies to all models and explains all equipment, including options. Therefore, you may find some explanations for equipment not installed on your vehicle.

All specifications provided in this manual are current at the time of printing. However, because of the Lexus policy of continual product improvement, we reserve the right to make changes at any time without notice.

Depending on specifications, the vehicle shown in the illustrations may differ from your vehicle in terms of color and equipment.

Reading this manual

This section explains symbols used in this manual.

Meanings of symbols in the text

The names and meanings of symbols are as follows:

-  WARNING

  Explains something that, if not obeyed, could cause death or serious injury to people.

-  NOTICE

  Explains something that, if not obeyed, could cause damage to or a malfunction in the vehicle or its equipment.

- 1 2 3... Step number

  Indicates operating or working procedures. Follow the steps in numerical order.

-  Info

  Explains important points other than functions and operating methods.

Meanings of symbols in illustrations

The names and meanings of symbols are as follows:

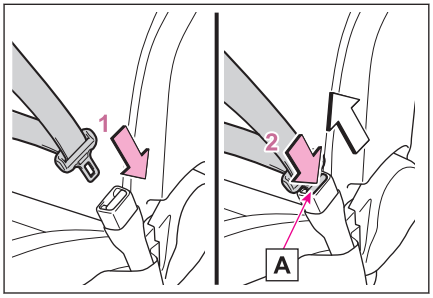

- Indicates the action (pushing, turning, etc.) used to operate switches and other devices.

- Indicates the outcome of an operation (e.g. a lid opens).

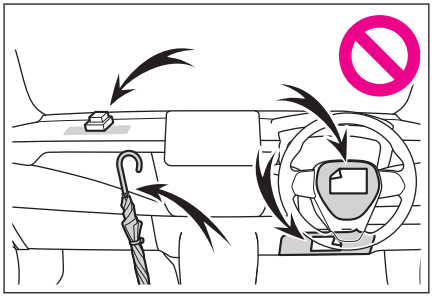

- Indicates the component or position being explained.

- Means Do not, Do not do this, or Do not let this happen.

Precautions for safe driving

⚠ WARNING

- Driving under the influence: Never drive your vehicle when under the influence of alcohol or drugs that have impaired your ability to operate your vehicle. Alcohol and certain drugs delay reaction time, impair judgment and reduce coordination, which could lead to an accident that could result in death or serious injury.

⚠ WARNING

- Driver distraction: Always give your full attention to driving. Anything that distracts the driver, such as adjusting controls, talking on a cellular phone or reading can result in a collision with resulting death or serious injury to you, your occupants or others.
- Always observe the legal speed limit when driving on public roads.
- Defensive driving: Always drive defensively. Anticipate mistakes that other drivers or pedestrians might make and be ready to avoid accidents.
- When driving over long distances, take regular breaks before you start to feel tired. Also, if you feel tired or sleepy while driving, do not force yourself to continue driving and take a break immediately.

Usage of data collected through Lexus Connected Services

If your Lexus has Lexus Connected Services and if you have subscribed to those services, please refer to the Lexus Connected Services usage contract for information on data collected and its usage.

For more information, visit https://www.lexus.com.au/privacy.

General precaution regarding children's safety

⚠ WARNING

Never leave children unattended in the vehicle, and never allow children to have or use the key.

Children may be able to start the vehicle or shift the vehicle into neutral.

There is also a danger that children may injure themselves by playing with the windows, or other features of the vehicle. In addition, heat build-up or extremely cold temperatures inside the vehicle can be fatal to children.

General precaution regarding a coin battery and button battery

⚠ WARNING



This product contains a coin battery or button battery.

Observe the following precautions. Failure to do so may result in death or serious injury.

- Keep away new and removed batteries from children.
- Do not swallow the battery. Doing so may cause chemical burns.
- If a battery is swallowed, it may cause severe chemical burns in as little as 2 hours and may result in death or serious injury.
- If you accidentally swallow a battery or put a battery into a part of your body, get emergency medical attention immediately.

Pictorial index

Exterior

INFORMATION

Light bulbs of the exterior lights for driving (Replacing method: P.663)

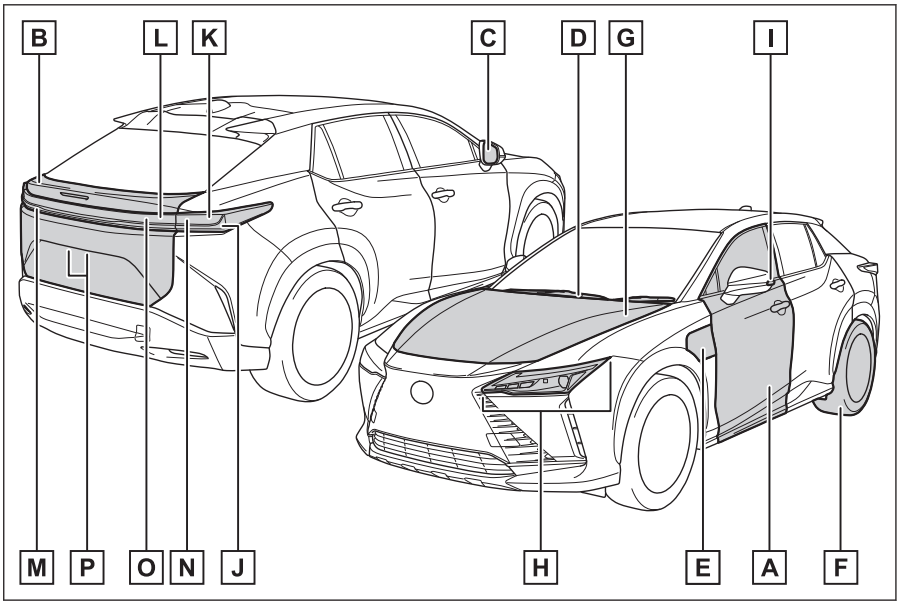

A **Side doors** **P.99**
Locking/unlocking P.102
Opening/closing the side doors P.99
Opening/closing the side windows P.120
Locking/unlocking by using the mechanical key P.622
Warning messages P.577

B **Back door** **P.125**
Opening from inside the cabin P.133
Opening from outside P.133
Warning messages P.577

C **Outside rear view mirrors** **P.163**
Adjusting the mirror angle P.163

Folding the mirrors P.163
Driving position memory* P.241
Defogging the mirrors P.218

D **Windshield wipers** **P.212**
Precautions for winter season P.219
Precautions for car wash P.506

E **Charging port** **P.36**
Charging method P.42

F **Tires** **P.531**
Tire size/inflation pressure P.673
Winter tires/tire chains P.219
Checking/rotation/tire pressure warning system P.531,532,534,548
Coping with flat tires P.606

G **Hood** **P.517**
Opening P.517
Coping with overheating P.659
Warning messages P.577

H **Headlights/front position lights/daytime running lights/cornering lights*/front turn signal lights** **P.196**

I **Side turn signal lights** **P.196**

J **Stop/tail lights** **P.196**
Emergency brake signal P.330

K **Rear turn signal lights** **P.196**

L **Back-up light**
Changing the shift position to R P.179

M **Tail light** **P.196**

N **Stop lights**
Emergency brake signal P.330

O **Rear fog light** **P.225**

P **License plate lights** **P.196**

*: If equipped

Instrument panel

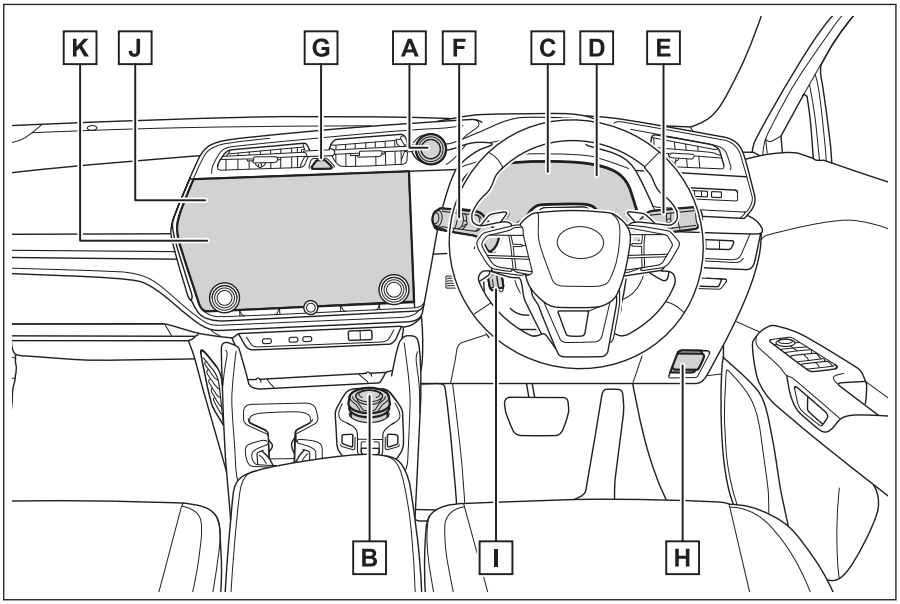

A **Power switch** **P.168**
Starting the EV system/changing the modes P.168,170
Emergency stop of the EV system P.563
When the EV system will not start P.594
Warning messages P.577

B **Rotary shifter** **P.177**
Changing the shift position P.178
Precautions for towing P.646,648,649

C **Meters** **P.304**
Reading the meters/adjusting the instrument panel light P.304,325
Warning lights/indicator lights P.298
When a warning light turns on P.567

D **Multi-information display** **P.310,312**
Display P.310,312
When a warning message is displayed P.577

E **Turn signal lever/Headlight switch** **P.186,196**

Headlights/front position lights/tail lights/license plate lights/daytime running lights P.196
Multi Weather Lights* P.224
Rear fog lights P.224

F **Windshield wiper and washer switch** **P.212**
Usage P.212
Adding washer fluid P.526
Warning messages P.577

G **Emergency flasher switch** **P.563**

H **Hood lock release lever** **P.517**

I **Tilt and telescopic steering control switch** **P.154**
Adjustment P.154
Driving position memory* P.241

J **Air conditioning system** **P.248**
Usage P.248
Rear window defogger P.217

K **Audio system***1

*: If equipped

*1: Refer to "Multimedia Owner's Manual".

Switches

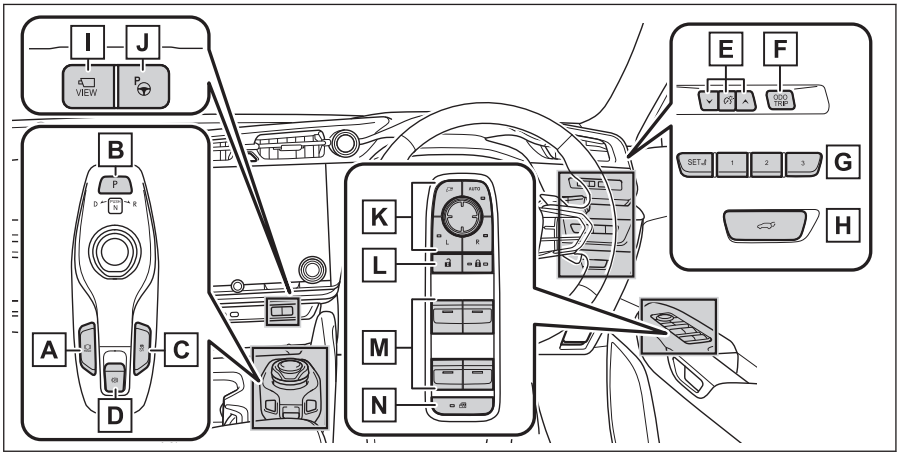

A Brake hold switch P.234

B P position switch P.190

C VSC OFF switch P.330

D Parking brake switch P.190

Applying/releasing the parking brake P.190

Precautions for winter season P.222

Warning buzzer/messages P.577

E Instrument panel light control switches P.325

F ODO/TRIP switch P.304

G Driving position memory switches* P.241

H Power back door switch P.133

I Camera switch*1

J Advanced Park (parking assist system) main switch* P.452

K Outside rear view mirror switches P.163

L Door lock switches P.102

M Power window switches P.120

N Window lock switch P.120

*: If equipped

*1: Refer to "Multimedia Owner's Manual".

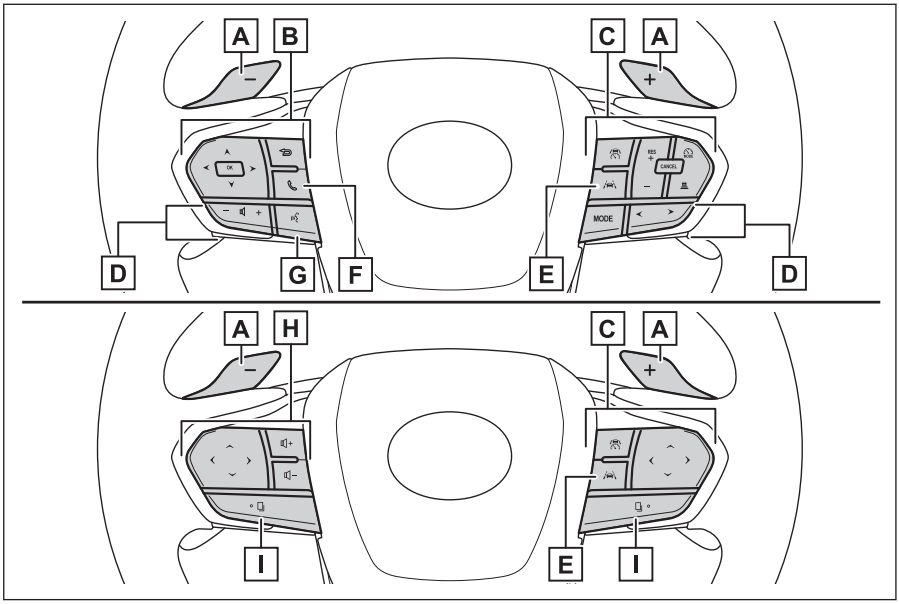

A Paddle shift switches P.187

B Meter control switches P.316

C Cruise control switch P.379,394

Dynamic radar cruise control P.379

D Audio remote control switches *1

E LTA (Lane Tracing Assist) switch P.365

F Telephone switch *1 ..... P.316

G Talk switch *1

H Audio remote control switches/telephone switch/talk switch *1 ..... P.316

I Switch function change switch *1 ..... P.316

*1: Refer to "Multimedia Owner's Manual".

Interior

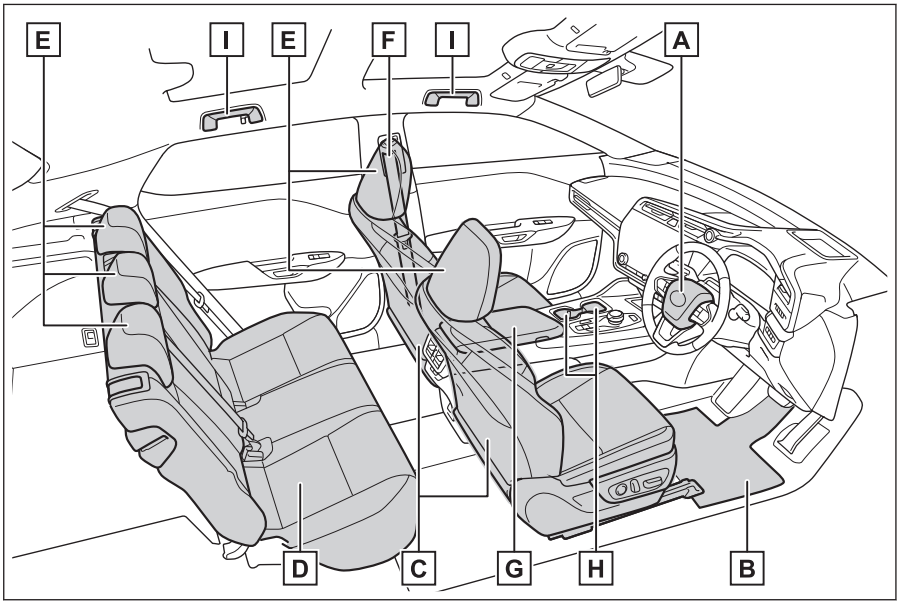

A SRS airbags P.486
B Floor mats P.22
C Front seats P.146
D Rear seats P.147
E Head restraints P.147
F Seat belts P.150
G Console box P.277
H Cup holders P.276
I Assist grips P.288

Ceiling

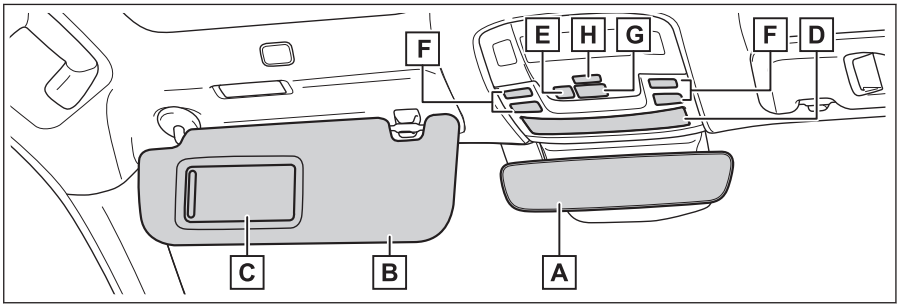

A Inside rear view mirror*/Digital Rearview Mirror* P.154,155
B Sun visors*1 ..... P.208
C Vanity mirrors P.289
D Auxiliary box P.275
E Dimming switch* P.263
F Interior light/Personal lights*2 ..... P.270,271
G [SOS] button* P.496
H Door-linked interior light switch P.271

*: If equipped

*1: NEVER use a rearward facing child restraint on a seat protected by an ACTIVE AIRBAG in front of it, DEATH or SERIOUS INJURY to the CHILD can occur. (→P.77)



*2: The illustration shows the front, but they are also equipped in the rear.

1 Before driving

1-1. Using the dedicated floor mats

Using the dedicated floor mats correctly 22

1-2. Important points for the EV system

Electric vehicle system features 24

Electric Vehicle system precautions 27

Battery Electric Vehicle driving tips 33

Driving range 35

1-3. Charging with the EV system

Charging equipment 36

Locking and unlocking AC charging connector 40

Charging methods 42

Charging tips 45

Things to know before charging 47

How to use AC charging 51

How to use DC charging 58

Using the charging schedule function 64

Using My Room Mode 71

1-4. For safe driving with children on board

Riding with children 73

Child restraint systems 75

1-5. Entering/exiting the vehicle

Key types 90

Smart entry & start system 94

Opening/closing the doors 99

Locking/unlocking the doors .. 102

Immobilizer system 105

Alarm 106

Trailer towing (vehicles with towing package) 112

Trailer towing (vehicles without towing package) 119

Opening and closing the windows 120

1-6. Loading luggage

Loading the vehicle with luggage 124

1-7. Obtaining the correct driving posture

Adjusting the seats 146

Using the seat belts 150

Adjusting the position of the steering wheel and mirrors 154

Using the dedicated floor mats correctly

Use only floor mats designed specifically for vehicles of the same model and model year as your vehicle. Fix them securely in place onto the carpet.

⚠ WARNING

- When installing a driver's side floor mat, do not use floor mats designed for other models or different model year vehicles, even if they are Lexus Genuine floor mats.
- Only use floor mats designed for the driver's seat.
- Do not use two or more floor mats on top of each other.
- Do not place the floor mat bottom-side up or upside-down.

Securing the floor mats

⚠ WARNING

Check the following before driving.

- Check that the floor mat is securely fixed in the correct place with all the provided retaining hooks (clips). Be especially careful to perform this check after cleaning the floor.



- With the EV system stopped and the shift position in P, fully depress each pedal to the floor to make sure it does not interfere with the floor mat.

1 **Insert the retaining hooks (clips) into the floor mat eyelets.**

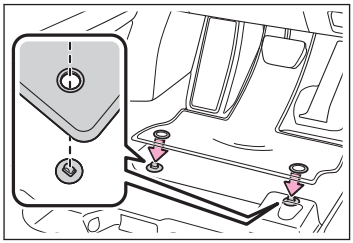

⚠ WARNING

Always install the floor mat securely using the retaining hooks (clips) provided.

2 **Turn the upper knob of each retaining hook (clip) to secure the floor mats in place.**

Always align the △ marks A.

The shape of the retaining hooks (clips) may differ from that shown in the illustration.

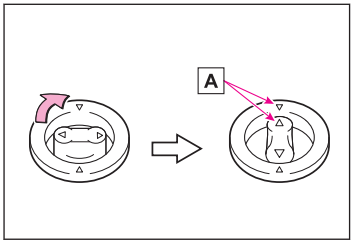

Electric vehicle system features

Battery electric vehicles are considerably different from conventional vehicles. They use electricity charged in a traction battery, to drive the electric motor. Since battery electric vehicles are driven using electricity, they do not emit any emissions such as CO_2 (Carbon Dioxide) and NOx (Nitrogen Oxides). Battery electric vehicles are environmentally friendly vehicles.

System components

The illustration is an example for explanation and may differ from the actual item.

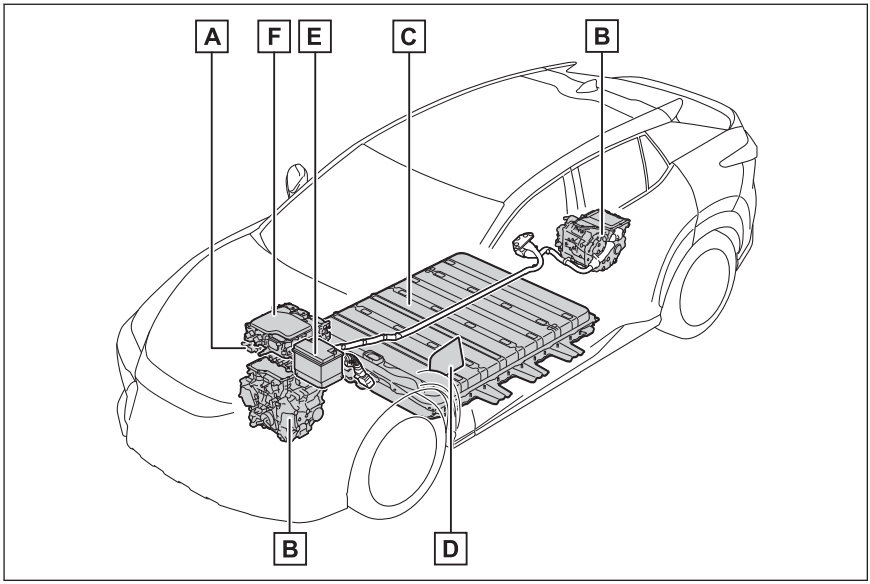

A Onboard traction battery charger

B Electric motor (traction motor) (front/rear)/Inverter (front/rear)

C Traction battery

Provides electricity to the electric motor.

D Charging port

E 12-volt battery

Provides electricity to various vehicle systems such as the SRS airbags, headlights, wipers, etc.

F ESU: Electricity Supply Unit (built in DC/DC converter)

■ When braking (regenerative braking)

The electric motor (traction motor) charges the traction battery.

The driving range can be extended by actively using this regenerative braking to store electricity in the traction battery.

Charging

The battery electric vehicle is driven using electricity, which is received from an external power source and stored in the traction battery. Not only public charging stations, but also household sockets can be used for charging. Procedures are different from refueling a conventional vehicle. Therefore, make sure to read the following thoroughly.

- Charging equipment (→P.36)
- Things to know before charging (→P.47)
- How to charge your vehicle (→P.51,58)
- When charging cannot be performed normally (→P.634,636)

INFORMATION

Regenerative braking

In the following situations, kinetic energy is converted to electric energy and deceleration force can be obtained in conjunction with the recharging of the traction battery.

- The accelerator pedal is released while driving with the shift position in D.
- The brake pedal is depressed while driving with the shift position in D.

Charging the 12-volt battery

The 12-volt battery is charged from the traction battery when the EV system is operated or while the traction battery is being charged.

If the vehicle has not been used for a long time, the 12-volt battery may become low due to self-discharge. If this occurs, follow the correct procedures. (→P.624)

When not using the vehicle for an extended period of time

- When the vehicle will not be used for an extended period of time, charge the traction battery once a month.

  This protects the traction battery from extreme voltage decline due to self discharging.
- When the vehicle will not be used for an extended period of time, the 12-volt battery will be charged from the traction battery to reduce the risk of the 12-volt battery discharged. In this case, the cooling fan may operate, however it is not a malfunction.
- To prevent the 12-volt battery from being discharged, do not leave the charging port lid open or the charging cable connected to the vehicle.

Charging the traction battery

Be sure to maintain the traction battery charge level suitable for your driving needs.

If the traction battery fully discharges, the vehicle cannot be driven at all. When the battery becomes low, charge it as soon as possible.

If the traction battery becomes low

- If the traction battery becomes low, the traction battery charge warning light comes on or flashes and a message will be displayed on the multi-information display. (→P.568)
- If the traction battery is completely discharged, the EV system cannot be started and driving will not be possible. When the traction battery becomes low, charge it as soon as possible.

Sounds and vibrations specific to an electric vehicle

Because there is no engine sound or vibration, it is easy to mistake the electric vehicle for being off when it is actually still running, as indicated by the "READY" indicator being illuminated. For safety, make sure to always shift the shift position to P and apply the parking brake when parked.

Before and after the EV system is started, the following sounds and vibrations may occur. However, these sounds and/or vibrations are not signs of malfunctions:

- The brake system operation sound may be heard from the front of the vehicle when the driver's door is opened.
- Motor sounds may be heard from the motor compartment or luggage compartment.
- Electrical relay sounds may be heard from the motor compartment when the EV system starts or stops.
- Relay operating sounds such as a snap or soft clank will be emitted from the traction battery in the following situations:
  - When the EV system is started or stopped
  - When charging starts or completes
  - When the vehicle is driven the first time after the traction battery has been charged using DC charging
- Sounds may be heard due to regenerative braking when the brake pedal is depressed or as the accelerator pedal is released.
- Cooling fan operating sounds from the radiator.
- The operation sound of the air conditioning system (air conditioning compressor, blower motor).

Maintenance, repair, recycling, and disposal

Contact your Lexus dealer regarding maintenance, repair, recycling and disposal. Do not dispose of the vehicle yourself.

Electric Vehicle system precautions

Be careful of the high voltage components (nominal voltage at 355.2 V), such as the traction battery, electricity supply unit, orange colored high voltage cables, and electric motor, as well as high temperature components such as the cooling radiator, which are provided on the battery electric vehicle. Read the following descriptions carefully before using the EV system, and handle the EV system correctly. Note that warning labels with a ⚠ mark are attached to the high voltage components, to remind you of careful handling required.

System components

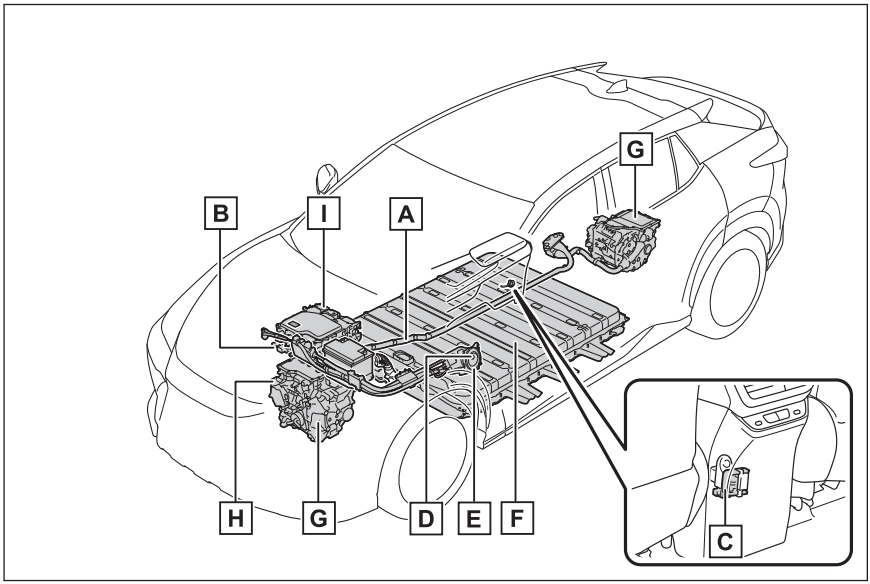

The illustration is an example for explanation and may differ from the actual item.

- A High voltage cables (orange)
- B Onboard traction battery charger
- C Service plug
- D AC charging inlet
- E DC charging inlet
- F Traction battery
- G Electric motor (traction motor) (front/rear)/Inverter (front/rear)
- H Air conditioning compressor
- I ESU: Electricity Supply Unit (built in DC/DC converter)

INFORMATION

Electromagnetic waves

- High-voltage parts and cables on the battery electric vehicles incorporate electromagnetic shielding, and therefore emit approximately the same amount of electromagnetic waves as conventional gasoline-powered vehicles or home electronic appliances.
- Your vehicle may cause sound interference in some third party-produced radio parts.

Traction battery (Lithium-ion battery)

The traction battery has a limited service life.

The traction battery capacity (the ability to store energy) reduces with time and use in the same way as other rechargeable batteries. The extent at which capacity reduces changes drastically depending on the environment (outside temperature, etc.) and usage conditions, such as how the vehicle is driven and how the traction battery is charged.

This is a natural characteristic of lithium-ion batteries, and is not a malfunction. Also, even though the driving range decreases when the traction battery capacity reduces, vehicle performance does not significantly become worse. In order to reduce the possibility of the capacity reducing, follow the directions listed on "Capacity reduction of the traction battery"(→P.49).

Starting the EV system in an extremely cold environment

When the traction battery is extremely cold (below approximately -30°C [-22°F]) due to the temperature outside of the vehicle, it may not be possible to start the EV system. In this case, try to start the EV system again after the temperature of the traction battery increases due to the outside temperature increasing, etc.

⚠ WARNING

High-voltage precautions

The vehicle has high voltage DC and AC systems as well as a 12-volt system.

DC and AC high voltage systems are very dangerous and can cause severe burns and electric shock that may result in death or serious injury.

- Never touch, disassemble, remove, or replace the high voltage parts, cables (orange) or their connectors.
- Do not touch the high voltage components. They are extremely hot, especially after driving.

⚠ WARNING

- Never try to open the service plug access hole located under the floor. The service plug is used only when the vehicle is being serviced and is subject to high voltage.



Road accident cautions

Observe the following precautions to reduce the risk of death or serious injury:

- Stop the vehicle in a safe place to prevent subsequent accidents. While depressing the brake pedal, apply the parking brake and shift the shift position to P to stop the EV system. Then, slowly release the brake pedal.
- Do not touch the high voltage parts, cables (orange) and connectors.
- If electric wires are exposed inside or outside your vehicle, an electric shock may occur. Never touch exposed electric wires.
- Do not touch the traction battery if liquid is leaking from or adhered to it. If electrolyte (Organic Carbonate-based electrolyte) from the traction battery comes into contact with the eyes or skin, it could cause blindness or skin wounds. In the unlikely event that it comes into contact with the eyes or skin, wash it off immediately with a large amount of water, and seek immediate medical attention.
- If electrolyte is leaking from the traction battery, do not approach the vehicle.

  Even in the unlikely event that the traction battery has been damaged, the internal construction of the battery will prevent a large amount of electrolyte from leaking out. However, if electrolyte leaks, vapors will be emitted. These vapors are an irritant to skin and eyes and could cause acute poisoning if inhaled.
- Do not bring burning or high-temperature items close to the electrolyte. The electrolyte may ignite and cause a fire.
- If a fire occurs in the battery electric vehicle, leave the vehicle as soon as possible. Never use a fire extinguisher that is not meant for electrical fires. Using even a small amount of water may be dangerous.
- If your vehicle needs to be towed, be sure to transport the vehicle with the four wheels raised. If the vehicle is towed with the wheels which are connected to the electric motor (traction motor) contacting the ground, electricity generated by the operation of the motor may cause a fire to occur depending on the nature of the damage or malfunction. (→P.646)

⚠ WARNING

- Carefully inspect the ground under the vehicle. If leaked liquid (other than water from the air conditioning) is found on the ground, the traction battery may have been damaged. Leave the vehicle as soon as possible.

  In addition, contact your Lexus dealer with regard to the leakage found on the ground.

  Even in the event of a minor accident, the traction battery and surrounding parts may be damaged. In case of an accident, have the traction battery inspected at your Lexus dealer.

Traction battery

- Your vehicle contains a sealed lithium-ion battery.
- Never resell, hand over or modify the traction battery. To prevent accidents, traction batteries that have been removed from a disposed vehicle are collected through your Lexus dealer. Do not dispose of the battery yourself. Unless the battery is properly collected, the following may occur, resulting in death or serious injury:
  - Do not illegally dispose of or dump the traction battery, and it is hazardous to the environment or someone may touch a high voltage part, resulting in an electric shock.
  - The traction battery is intended to be used exclusively with your battery electric vehicle. If the traction battery is used outside of your vehicle or modified in any way, accidents such as electric shock, heat generation, smoke generation, an explosion and electrolyte leakage may occur. When reselling or handing over your vehicle, the possibility of an accident is extremely high because the person receiving the vehicle may not be aware of the dangers from these modifications.
- If your vehicle is disposed of without the traction battery having been removed, there is a danger of serious electric shock if high voltage parts, cables and their connectors are touched. In the event that your vehicle must be disposed of, the traction battery must be disposed of by your Lexus dealer or a qualified service shop. If the traction battery is not disposed of properly, it may cause electric shock that can result in death or serious injury.
- For information about traction battery collection locations, contact information, or the recycling process, contact your Lexus dealer.

Caution while driving

- Pay special attention to the area around the vehicle. Because there is no engine noise, pedestrians, people riding bicycles or other people and vehicles in the area may not be aware of the vehicle starting off or approaching them, so take extra care while driving.
- If the vehicle under floor area receives strong shock or impact while driving, stop the vehicle in a safe place and check around the bottom of the vehicle. If there is damage

⚠ WARNING

to the traction battery or liquid leakage, it may lead to a vehicle fire, etc. Do not touch the vehicle and immediately contact your Lexus dealer.

Even if no damage can be seen under the floor, the traction battery may be damaged. If the vehicle received an impact under the floor, have the traction battery inspected at your Lexus dealer.

■ Modifications

Do not make modifications that lower the height of the vehicle. The traction battery in the under floor area may come into contact with the ground when the height of vehicle is lowered. If the traction battery is damaged, a vehicle fire may occur, possibly resulting in death or serious injury.

Emergency shut off system

→P.565

Warning message

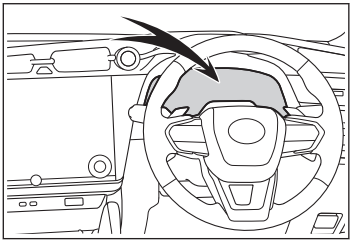

A message is automatically displayed when a malfunction occurs in the EV system or an improper operation is attempted.

If a warning message is shown on the multi-information display, read the message and follow the instructions. (→P.577)

INFORMATION

■ If a warning light comes on, a warning message is displayed, or the 12-volt battery is disconnected

The EV system may not start.

In that case, try to start the system again. If the "READY" indicator does not come on, contact your Lexus dealer.

■ When the traction battery is completely discharged

When the EV system cannot be started due to the traction battery being completely discharged, restart the system after AC charging or DC charging. When charging, it is

recommended to charge the traction battery until the traction battery charge warning light turns off in order to ensure sufficient driving distance.

Battery Electric Vehicle driving tips

Unlike the conventional vehicles, the electricity consumption efficiency of battery electric vehicles will decline if they continue driving on highways (or freeways) or at high average speeds, causing the possible driving distance to reduce. Therefore, if the remaining charge of the traction battery is low, avoid relying on the displayed possible driving distance too much as well as driving on highways (or freeways). Driving the vehicle at moderate speeds, the traction battery's electricity consumption can be controlled. The following driving tips will contribute to reduction in the battery consumption and increase in the driving range.

Shift position operation

Shift the shift position to D when stopped at a traffic light, or driving in heavy traffic, etc. Shift the shift position to P when parking. When shifting the shift position to N while driving, there is no positive effect on electricity consumption. In the N, the traction battery cannot be charged. Also, when using the air conditioning system, etc., the traction battery electricity is consumed. (→P.178)

Using Eco drive mode/Range mode

■ Eco drive mode

When using Eco drive mode, torque generation is slower when stepping on the accelerator pedal, air conditioning operations (heating/cooling) are restrained, and driving becomes suited for improved electricity consumption.(→P.231)

■ Range mode

When using range mode, the driving controls are changed to those for improved electric consumption, in terms of the vehicle speed limits, the maximum driving force limits, the optimized front-rear allocation of the driving force, etc., along with turning off of the air conditioning system (heating/cooling).

When in range mode and the cruise control or dynamic radar cruise control is operated, the vehicle speed limit is 100 km/h (62 mph), even though a higher speed is set. In this mode, the driving distance will be maximized. (→P.231)

Delays

Repeated acceleration and deceleration due to traffic congestion, long waits at traffic lights, and driving on steep inclines will lead to poor electricity consumption. In order to avoid those situations as much as possible, check traffic reports before leaving. If the vehicle is driven in traffic congestion, gently release the brake pedal

to allow the vehicle to move forward slightly, avoid overuse of the accelerator pedal. Doing so can help minimize unnecessary electricity consumption.

When braking

Make sure to operate the brakes gently and a timely manner. A greater amount of electrical energy can be regenerated when slowing down.

Highway (or freeways) driving

Control and maintain the vehicle at a constant speed. Before stopping at a toll booth or similar, allow plenty of time to release the accelerator and gently apply the brakes. A greater amount of electrical energy can be regenerated when slowing down.

Air conditioning

- Use the air conditioning only when necessary. Doing so can help reduce excessive electricity consumption.

  In summer: When the ambient temperature is high, use the recirculated air mode. Doing so will help to reduce the burden on the air conditioning system and reduce electricity consumption as well.

  In winter: Excessive or unnecessary heating should be avoided. Also, electricity consumption can be improved by avoiding overuse of the heater.

- Lexus Climate Concierge allows automatic air conditioning control to maintain a comfortable condition, helping minimize unnecessary electricity consumption. (→P.246)

Checking tire inflation pressure

Make sure to check the tire inflation pressure frequently. Improper tire inflation pressure can cause poor electricity consumption.

Also, as snow tires can cause large amounts of friction, their use on dry roads will lead to poor electricity consumption. Use tires that are appropriate for the season.

Luggage

Carrying heavy luggage will lead to poor electricity consumption. Avoid carrying unnecessary luggage.

Driving range

The driving range displayed on the meter, etc., shows the reference distance that driving is possible, and the actual distance that can be driven may differ from that displayed.

Displayed value

The value that sufficient driving performance is provided, estimated from the remaining charge of the traction battery, the state of the traction battery, and the outside temperature, is displayed on the meter. (→P.304)

When the outside temperature is low, the traction battery output may be decreased, causing the possible driving distance to be shorter. However, this is not a malfunction. Charge the traction battery earlier than usual.

Tips for extending the driving range

Possible driving distance varies significantly depending on how the vehicle is driven, road conditions, the weather, the outside temperature, usage conditions of electrical components and the number of occupants.

Possible driving distance could be extended if the followings are performed:

- Maintain a safe distance from the vehicle in front and avoid unnecessary acceleration and deceleration
- Accelerate and decelerate the vehicle as smoothly as possible
- Drive at moderate speeds as much as possible and maintain a constant speed
- Set the air conditioning system to a moderate temperature and avoid using the heating and cooling functions excessively.
- Use tires of the specified size and maintain the specified tire pressure
- Do not add unnecessary weight to the vehicle

Display when charging is completed

The followings indicate that charging has been carried out properly.

- The charging indicator turns off
- **"Charging Complete"** is displayed on the multi-information display when a door is opened while the power switch is off. (→P.46)

Regardless of the type of power source or whether the charging schedule function is used, charging is completed if the above can be confirmed.

Charging-related messages: →P.582

Charging equipment

Charging equipment and names

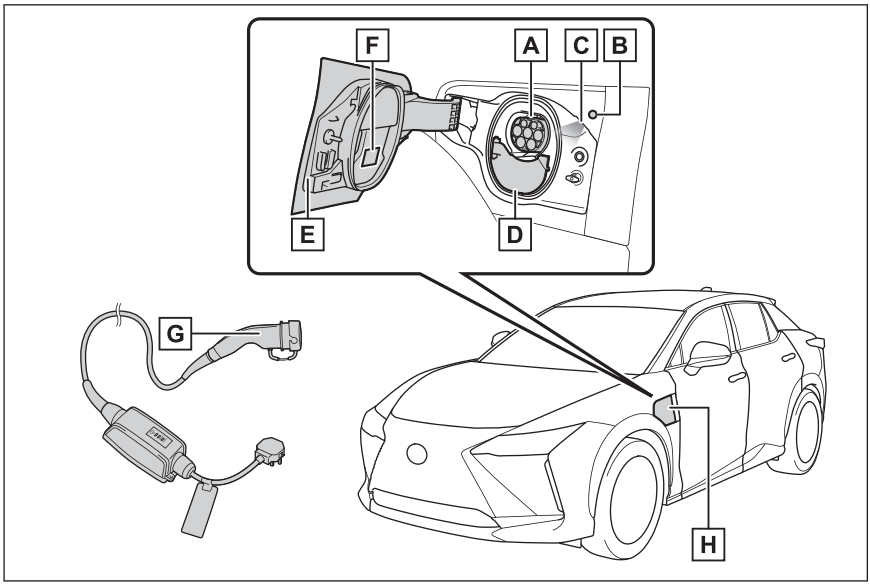

A AC charging inlet
B Charging indicator (→P.39)
C Charging inlet light
D DC charging inlet
E Charging port lid (→P.37)
F Caution label/identification label
G AC charging cable*1
H Charging port

*1: It is an example for explanation and may differ from the actual item. The AC charging cable can be purchased at your Lexus dealer.

Opening/closing the charging port lid

Open

Unlock the charging port lid by unlocking the doors. (→P.99)

Slightly open the charging port lid by pressing the rear edge of it (the position shown in the illustration)

Fully open the charging port lid by hand.

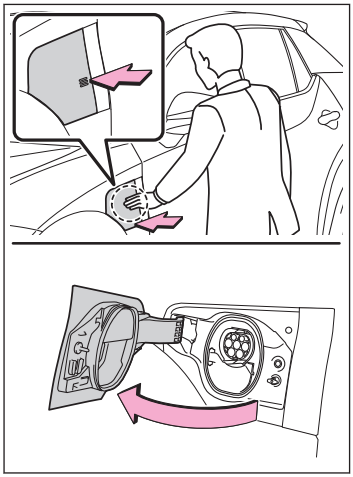

Close

Move the charging port lid to the slightly open position and then press the rear edge (the position shown in the illustration) to close it.

Charging port lid also locks when the doors are locked.

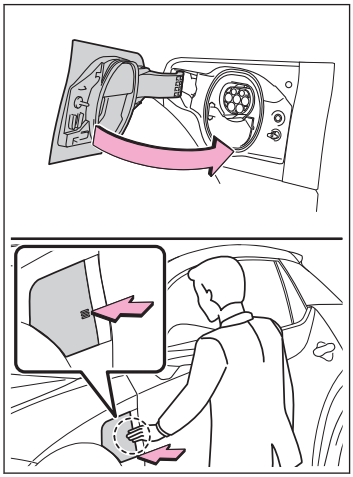

INFORMATION

The charging port lid will be locked when

- In the following cases, the charging port lid will be locked.
  - The doors are locked with the wireless remote control
  - The doors are locked with the smart entry & start system

- The doors are locked with the mechanical key

- The charging port lid will automatically be locked if the security feature locks the doors when the charging port lid is closed. (→P.102)
- If the charging port lid is closed after the doors are locked, the charging port lid will not be locked. In that case, after unlocking the doors once, the charging port lid can be locked by locking the doors.

Lid lifter

The charging lid is not closed if the lifter is pushing in before closing the charging lid. In that case, while unlocking the door, push again and release the lid lifter, and close the charging lid again.



Charging port lid open/close detection switch

When the charging port lid is open, do not touch the charging port lid open/close detection switch (Position shown in the figure).

If you touch it by mistake, the vehicle may incorrectly display the opened/closed status of the charging port lid, or the charging connector may not be able to lock/unlock normally.



When the charging port lid cannot be opened

→P.633

Charging indicator

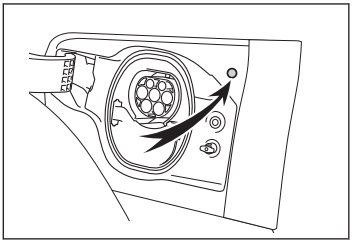

The illumination/flashing pattern changes to inform the user of the charging status in the following ways.

Illumination/ flashing pattern	Vehicle condition
Illuminated	● Charging is in progress(1) ● Traction battery heater (→P.42) is operating
Flashes normally(2)	When charging schedule is registered (→P.64) and AC charging cable is connected to vehicle
Flashes rapidly(2)	When charging cannot be carried out due to malfunction in a power source or the vehicle, etc. (→P.635)

(1) The indicator will turn off when charging stops or is complete.

(2) Flashes for a certain period of time, and then turns off.

INFORMATION

Charging indicator of the charging port

When a system malfunction occurs while charging, the charging indicator rapidly flashes for a certain period of time, and then turns off.

If this occurs, when a door is opened with the power switch off, a message is displayed on the multi-information display. When a message is displayed, follow the instructions displayed on the screen.

Locking and unlocking AC charging connector

Having the AC charging connector locked during charging will contribute to prevent it from being disconnected unintentionally, as well as deterring a third party from taking the AC charging cable out of the vehicle.

Locking and unlocking the AC charging connector

■ Locking the charging connector

The AC charging connector will be automatically locked when inserting it into the AC charging inlet.

■ Unlocking the charging connector

The AC charging connector will be unlocked when the doors are unlocked using the smart entry & start system or wireless remote control.

The AC charging connector locks when connected and unlocks when the door is unlocked, so locking/unlocking the AC charging connector does not necessarily correspond to locking/unlocking the door.

If the door is unlocked and the AC charging connector is locked, you can unlock it by doing the following:

- When using the smart entry & start system, lock the door once and then unlock it again. (→P.102)
- When using the wireless remote control, press the unlock button to unlock the door. (→P.103)

INFORMATION

■ AC charging connector lock function

- If the AC charging connector is locked/unlocked repeatedly, it may not work temporarily due to protect the system by AC charging system. In this case, wait for a while before connecting the AC charging connector to AC charging inlet again.
- The AC charging connector lock function does not guarantee that theft of the AC charging cable will be prevented, and is not necessarily effective for all mischiefs.

■ Security function for unlocking

If the AC charging connector is not removed within approximately 180 seconds after the vehicle is unlocked, the security function automatically locks the connector again.

■ Unlocking the AC charging connector during charging

If the AC charging connector is unlocked during charging, charging will be stopped.

Once the security function works, charging may not restart automatically.

In this case, remove the AC charging connector[*1] and insert it again.

When the AC charging connector cannot be inserted into the AC charging inlet

Check that the connector lock pin is not extended.

If the connector lock pin is extended, the connector lock is operating. Perform door unlock operation to unlock the AC charging connector lock and check that the connector lock pin is not extended.



If the AC charging connector cannot be unlocked

→P.639

⚠ NOTICE

When locking the AC charging connector

Observe the following precautions. Failure to do so may cause a malfunction in the charging connector locking system.

- Check that the AC charging connector is compatible with this vehicle.

  A charging connector of the different type or a charging connector with damaged or deformed insertion part may not be locked.
- Do not apply excessive force to the AC charging connector after the AC charging connector is inserted.

  When removing the AC charging connector, make sure to unlock the AC charging connector.

*1: When the AC charging connector is removed, the charging schedule will be updated.

Charging methods

The following methods can be used to charge the traction battery.

Types of charging methods

■ AC charging (→P.51)

This is a charging method used when charging from an AC socket with the AC charging cable or charging that uses AC charger.

By setting charging schedule, it is also possible to charge at the desired date and time. (→P.64)

■ DC charging (→P.58)

This charging method uses a DC charger that complies with IEC 61851 and IEC 62196. The traction battery can be charged in a shorter time than AC charging.

IEC is an abbreviation for an international standard established by the International Electrotechnical Commission.

Charging-linked functions

This vehicle is equipped with several functions that are linked with charging.

■ My Room Mode (→P.71)

When the charging cable is connected to the vehicle, electrical components such as the air conditioning system and audio system can be used by the power supply from an external power source*1.

■ Traction battery heater

When the outside temperature is low and the charging cable is connected to the vehicle, this function automatically warms the traction battery until it reaches or exceeds a certain temperature.

- The operation of this function is stopped automatically when the charging cable is disconnected or if the charging cable is left connected to the vehicle for approximately 3 days.
- When the charging schedule is used (→P.64), this function will operate according to the schedule settings.

■ Traction battery cooler

When the traction battery is hot and the AC charging cable is connected to the vehicle, this function cools the traction battery to protect it.

*1: Depending on the situation, electricity of the traction battery may be consumed.

- The function may operate when continuously driving at high speeds such as driving on highways or freeways, or during DC charging.
- For AC charging: Traction battery cooler will operate when the **"Battery cooling"** of the **"Charging"** on the center display is on. (→P.690)

  When selecting to off, the traction battery output may be restricted depending on the driving situation.

INFORMATION

Using My Room Mode during DC charging

→P.72

AC charging

AC charging requires less load on the traction battery than DC charging, leading to longer traction battery life.

Traction battery heater

- Traction battery heater may operate when charging is not being performed.
- When Traction battery heater is operating, the charging indicator will illuminate.
- When Traction battery heater is operating during charging, the charging may take longer than normal.
- The remaining charge of the traction battery declines when the traction battery heater operates, it might be necessary to recharge the traction battery again in order to supplement the remaining charge.

Traction battery cooler

- The charging indicator will illuminate when the traction battery cooler is on standby or operating.
- When the charge level of the traction battery is low, the traction battery cooler may not operate, even if the temperature of the traction battery is high.
- When the following conditions are met while the traction battery cooler is operating, the cooling operation will stop.
  - The hood is opened
  - The power switch is turned to ACC or ON.
  - The shift position is changed to any position other than P
  - The remaining charge of the traction battery drops below a certain amount
- The traction battery cooler operates using power supplied by the traction battery and an external power source.

- While the traction battery cooler is operating, the charge of the traction battery will increase and decrease within a certain range, and will not increase as during AC charging.
- When the traction battery cooler operates, charger will recognize it as the battery being charged. If this function operates while a charger which charges a charging fee is connected to the vehicle, AC charging fees will apply.

Charging tips

This section explains methods for using the charging function for this vehicle and checking information related to charging.

Systematically charging

To enable the use of battery electric vehicle, we recommend systematically charging the vehicle.

■ Before leaving home

In order to use the battery electric vehicle, charge the traction battery at home before leaving.

■ On the way to the destination or at the destination

When the remaining charge of the traction battery gets low, recharge the battery at the nearest charging station.

■ After returning home

In order to drive the next time, charge the traction battery.

Settings the charging schedule allows you to charge the traction battery at the desired time such as late at night or early in the morning. Furthermore, the charging schedule can be set to automatically charge the traction battery every day or at the same time on certain days. (→P.64)

Checking information related to charging

Information related to charging is displayed and can be checked on the multi-information display.*1

■ While charging

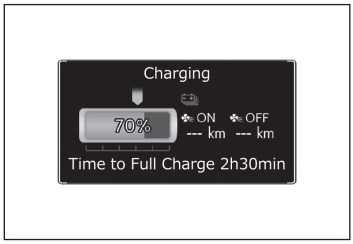

When any door is opened during charging with the power switch off, the current charging condition and approximate time remaining until charging is complete are displayed for a certain period of time.*2

The actual charging time may differ depending on conditions such as the remaining capacity of

*1: Various information related to charging can also be checked remotely.

*2: During DC charging, time to 80% charge will also be displayed. (Available when the charging limit is set to 90% or higher and the current charge amount is lower than 80%.)

the traction battery, outside temperature, and specifications of the AC/DC charger.

The time until charging completed may not be displayed if the charging current to the traction battery becomes smaller and the charging time becomes longer.

After charging is complete

When any door is opened with the power switch off after charging is complete, a message detailing the results of the charging is displayed for a while.

Also, a message is displayed if an operation that stops charging is performed or a situation where charging cannot be performed occurs.

When a message is displayed, follow the instructions displayed on the screen. (→P.577)

Things to know before charging

Make sure to read the following precautions before charging the traction battery.

INFORMATION

Safety functions

- The EV system will not start while the charging cable is attached to the vehicle, even if the power switch is operated.
- If the charging cable is connected while the "READY" indicator is illuminated, the EV system will stop automatically and driving will not be possible.

WARNING

Caution when charging

People with implantable cardiac pacemakers or cardiac resynchronization therapy-pacemakers should not carry out the charging procedure. Ask someone else to do it.

- Do not approach the charger and charging cable while charging.

  Charging procedure may affect the operation of such devices.
- Do not remain in the vehicle during charging.

  Charging procedure may affect the operation of such devices.
- Do not enter the vehicle even to take something out of the luggage compartment.

  Charging procedure may affect the operation of such devices.

When the charging cable is connected to the vehicle

Do not change the shift position from P.

In the unlikely event that the charging cable has been damaged, the shift position may change from P to another position and the vehicle could move, possibly leading to an accident.

Charging precautions

This vehicle has been designed to allow charging from an external power source using an AC charging cable for exclusive use with standard household AC sockets.

However, the vehicle differs greatly from standard household electrical goods in the following ways, and incorrect usage could cause fire or electric shock, possibly leading to death or serious injury.

- When charging, a large amount of current will flow for a long time.
- Charging can be conducted outdoors.

NOTICE

Charging precautions

To charge properly, follow the procedure after reading the explanation below. Charging is intended to be carried out by licensed drivers only who properly understand the charging procedure.

- Do not allow people who is not used to charging, such as children, to perform charging without supervision.Also, keep the AC charging cable out of reach of infants.
- When charging with a charger, follow the procedures for using each charger.

Confirm the following before charging

Before charging, always check the following items.

- The parking brake is applied. (→P.190)
- The power switch is turned to OFF. (→P.172)
- Lights such as the headlights, emergency flashers and interior lights, etc. are turned off.

  If these light switches are turned on, then these features will consume electricity, and charging time will increase.

Inspecting the AC charging cable

Before charging, make sure that each part of the AC charging cable is in good condition.

INFORMATION

During charging

- The charging starting time may differ depending on the state of the vehicle, but this does not indicate a malfunction.
- During charging, sounds may be heard from near the traction battery in accordance with the operation of the air conditioning system or traction battery cooler.
- During and after charging, the motor compartment and its surrounding area in which the onboard traction battery charger is installed may get warm.
- Depending on radio wave conditions, interference may be heard on the radio.

When charging using a public charging facility

When charging using a public charging facility, check the setting of the charging schedule function.

- When the charging schedule is registered, temporarily turn off the function or turn [**Charge now**] on. (→P.68,69,70)
- When the charging schedule is set to on, charging will not start even if the AC charging cable is connected. Also, charging fee may occur due to connection of the AC charging cable.

Capacity reduction of the traction battery

The capacity of the traction battery will decline gradually when the traction battery is in use. The rate at which it declines will differ in accordance with environmental conditions and the way in which the vehicle is used. Observing the following can help suppress the decline in the traction battery capacity.

- Avoid parking the vehicle in high temperature areas, under direct sunlight when the traction battery is fully charged.
- Avoid accelerating and decelerating frequently and suddenly.
- Avoid frequent driving at high speed.
- Use the charging schedule function as much as possible in order to fully charged the traction battery before starting off. (→P.64)
- Avoid frequent DC charging

  Also, if the capacity of the traction battery capacity reduces, the distance that can be driven decreases. However, vehicle performance does not significantly become worse.

When the remaining charge of the traction battery is low after charging

In the following situations, the remaining charge of the traction battery after charging completes may be less than normal in order to protect the traction battery (the driving range after the battery is fully charged may be shorter).*1

- Charging is performed when the outside temperature is low or high
- Charging is performed immediately after high-load driving or in extreme heat

  In any other situation, if the remaining charge of the traction battery is significantly lower than normal after charging completes, have the vehicle inspected by your Lexus dealer.

The charging amount sent to the traction battery or the remaining charge amount of the traction battery may decrease when

When the operation of the battery heater, etc. reduces the charging power sent to the traction battery, the charging amount sent to the traction battery or the remaining charge amount of the traction battery may decrease.

*1: When this occurs, even if the remaining charge display of the traction battery shows that it is fully charged, the remaining charge rapidly decreases faster than normal.

Charging time may increase

In the following situations, charging time may become longer than normal:

- In very hot or very cold temperatures.
- When the traction battery becomes hot, such as immediately after high-load driving.
- The vehicle is consuming a lot of electricity, for example, when the headlights are on, etc.
- When using My Room Mode. (→P.71)
- There is a power outage during charging.
- When adjusting the power supply with the charger.
- There is an interruption in the electrical supply.
- There is a drop in the voltage of external power source.
- The charge in the 12-volt battery is low, for example due to the vehicle being left unused for a long period of time.
- When the upper limit of charging current is changed in the charging current setting of the vehicle (→P.53)
- When the battery heater operates. (→P.42)
- When the traction battery cooler is operated before charging. (→P.42)
- When the plug generates heat due to a loose socket connection, etc.
- When frequently and repeatedly using DC charging.
- When selecting [**DC charging power**] setting other than [**Max**]. (→P.60)
- When the temperature of charging-related parts is high.
- When the vehicle restricts the flow of electricity to be charged due to the conditions of the connected external power source.

AC charging power

AC charging of up to approximately 11 kW can be performed on this vehicle.

However, depending on the used charger or AC charging cable, charging power may be limited.

When performing charging in extremely cold conditions

When the outside temperature is extremely low, it may take longer than usual to charge the vehicle.

Before starting charging, it is recommended to remove snow or ice that covers the hood, front grille, and front bumper and install a car cover, etc.

How to use AC charging

This section explains the procedure for charging the traction battery with an AC charging cable. When using an AC charger, make sure to check the operation instructions of the AC charger. When the charging schedule is registered, make sure [**Charge now**] is turned on before charging. (→P.69,70)

⚠ NOTICE

■ When using the AC charging related parts

To prevent damage to the AC charging related parts, observe the following precautions.

- When removing the AC charging cable, check that the charging connector is unlocked.
- Do not apply a vibration to the charging connector while charging. Charging may be stopped.
- Do not insert anything but the charging connector into the AC charging inlet.

■ AC charging inlet

Do not disassemble, repair or modify the AC charging inlet. When the AC charging inlet needs to be repaired, consult your Lexus dealer.

Charging precautions

→P.48

When charging

1 **Prepare the AC charging cable.**

2 **Insert the plug of the AC charging cable into the socket of the external power source.**

Make sure to hold the body of the plug and insert it firmly into the socket.

If there is a switch that can switch the power supply to the socket, turn it on.

3 **Unlock the doors and open the charging port lid. (→P.37)**

The charging inlet light will illuminate.

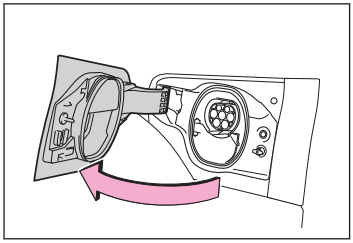

4 **Make sure to hold the body of the charging connector and insert it firmly and fully into the AC charging inlet.**

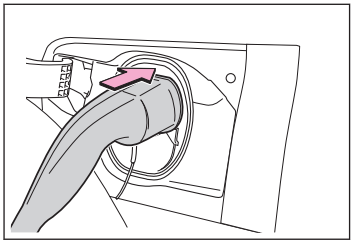

When the charging connector is inserted straight as far as possible, it will automatically lock. (→P.40)

Check that the charging indicator illuminates. If the charging indicator does not illuminate, the charging connector is not locked.*1

5 **Confirm that the charging indicator of the charging port is illuminated.**

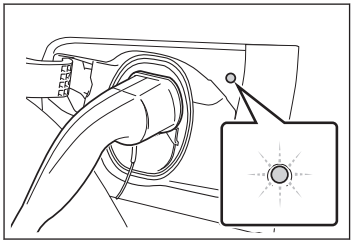

Charging will not start if the charging indicator does not illuminate when the charging connector is inserted. (→P.634)

If the charging indicator is flashing, the charging schedule is registered.

Charging will not start if the charging connector is not locked. However, depending on the type of the charger of the public charging station, the charging connector will not be locked if the operation to start the charging is not performed.

The charging indicator will turn off when charging is completed.

The charging indicator will also turn off when charging is interrupted. In this case, refer to P.634

INFORMATION

When connecting the AC charging connector



If the door is opened or the power switch is turned to ON with the AC charging connector connected, the charging cable indicator turns on to notify that the AC charging connector is connected.

*1: If the charging connector is not firmly inserted, locking operation will be performed several times.

If the charging indicator of the charging port flashes after connecting the AC charging cable

The charging schedule (→P.64) is registered and charging cannot be performed. To cancel charging using the charging schedule and start charging, perform any of the following procedures.

- Turn [**Charge now**] on (→P.69,70)
- While the charging indicator is flashing, remove and reconnect the charging connector immediately

When the charging connector cannot be inserted into the AC charging inlet

→P.41

Safety function

Charging will not start when the charging connector is not locked. If the charging indicator does not illuminate even when the charging connector is inserted, remove and reinsert the connector, and then check that the charging indicator of the charging port illuminates.

Charging time may increase

→P.50

Charging at a public charging station with authentication function

When a door is unlocked during charging, the charging connector is unlocked and charging will be stopped. In this case, the charging station authentication is canceled and charging may not be able to restart. Reconnect the charging connector and perform authentication for the charging station.

When your circuit breaker trips during charging

The upper limit of the charging current can be changed on the center display as follows.*1*2*3 (→P.690)

- Max
- 16A
- 8A

The maximum charging current is limited to less than or equal to the selected current.*4

*1: The maximum charging current can be changed when the power switch is in ON.

*2: If the power supply of the AC charging stand being used has been adjusted or depending on the AC charging cable being used, the supplied current may be lower than the set maximum charging current.

*3: When in three-phase charging, the selected amount of current flow is provided per phase.

*4: Restricting the charging current will lengthen the charging time.

If the breaker still trips while charging, even after changing the upper limit of the charging current, check if the connected power source meets the specified charging conditions.

■ Changing the [Charging Limit] settings

The upper limit of the charge capacity can be changed on the center display as follows.*1 (→P.690)

- Full
- 90%
- 80%
- 70%
- 60%
- 50%

The selected upper limit value is common to AC charging and DC charging.

If the setting is changed during DC charging, charging may stop due to the operation of the DC charger timer and the traction battery cannot be fully charged.

■ Protection function of AC charging inlet overheating

By installing a temperature sensor to the AC charging inlet, prevents parts from melting when the temperature rises due to foreign matter entering the charging connector.

When a certain temperature increase is detected, charging is stopped immediately.

After this, when a door is opened while the power switch is off, a message will be displayed on the multi-information display (→P.577)

■ When charging

If charging cable installed on another vehicle is used, charging may be stopped.

⚠ WARNING

■ When charging

Observe the following precautions.

Failure to do so may cause an unexpected accident, resulting in death or serious injury.

- Before charging, check that the AC charging inlet is not deformed, damaged or corroded, and check that the inlet is free of foreign matter such as dirt, snow and ice.

  If there is dirt or dust in these areas, remove completely before inserting the charging connector.
- Do not get the terminals of the AC charging inlet wet.

*1: The charging limit settings cannot be changed when the power switch is in ACC.

⚠ WARNING

- Do not touch the terminals of the charging connector and AC charging inlet with a sharp metal objects (needles, etc.,) or hands, or short them with foreign objects.
- In order to stop charging at the charging station, follow the instructions of the charger.
- If any heat, smoke, odors, noise or other abnormalities are noticed during charging, stop charging immediately.
- Do not charge the vehicle during a lightning storm.
- Prevent the AC charging cable from being caught in the door or back door.
- Close the hood before using the charging system.

  The cooling fan may start operating suddenly. Touching or getting close to rotating parts such as the fan may cause your hands or clothes (especially a necktie or scarf) to become caught and result in a serious injury.

Onboard traction battery charger

The onboard traction battery charger is located in the motor compartment. Make sure to observe the following precautions regarding the onboard traction battery charger. Failure to observe these precautions may result in death or serious injury such as burns and electric shocks.

- The onboard traction battery charger is hot during charging. Do not touch the onboard traction battery charger, as doing so may result in burns.
- Do not disassemble, repair or modify the onboard traction battery charger. When the onboard traction battery charger needs to be repaired, consult your Lexus dealer.

⚠ NOTICE

When charging

Do not insert the plug into the AC charging inlet.

The AC charging inlet may be damaged.

Using private power generator

Do not use private power generators as a power source for charging.

Doing so may make charging unstable, the voltage may be insufficient, and the charging operation may stop.

Charging station

Due to the environment in which the power equipment is located, charging may be unstable due to noise, the voltage may be insufficient, and the charging operation may stop.

After charging

1 Unlock the doors to unlock the charging connector. (→P.40)

The charging connector will be unlocked and the charging inlet light will illuminate when the doors are unlocked.

If the AC charging connector is unlocked during charging, charging will be stopped.

2 Make sure to hold the body of the charging connector and pull it towards you.

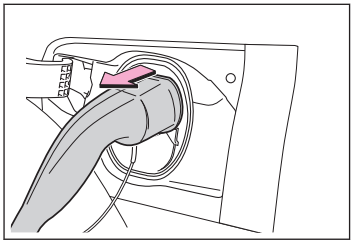

3 Close the charging port lid.Lock the doors to lock the charging port lid. (→P.37)

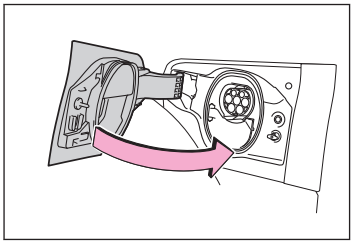

INFORMATION

When the outside temperature is low or high

The level shown on the SOC (State of Charge) gauge (→P.304) may drop slightly when the power switch is turned to ON, even if charging has been completed and the traction battery is fully charged. However, this does not indicate a malfunction.

When removing the charging connector

Unlock the doors using the smart entry & start system or wireless remote control to unlock the charging connector, check that the lock is released, and then pull the charging connector towards you.

If the charging connector cannot be unlocked

→P.639

⚠ NOTICE

After charging

After disconnecting the charging connector from the AC charging inlet, make sure to close the charging port lid.If the charging port lid is left open, water or foreign objects may enter the AC charging inlet, which could lead to vehicle damage.

How to use DC charging

This section explains the DC charging procedure for the traction battery. When using a DC charger, make sure to check the operation instructions of the DC charger.

⚠ WARNING

■ When using a DC charger

Observe the following precautions.

Failure to do so may cause an unexpected accident, resulting in death or serious injury.

- Use a DC charger that complies with IEC 61815 and IEC 62196.
- Do not use the charging cable longer than 30 meters.

Confirm the following before charging

→P.48

When charging

1 **Unlock the doors and open the charging port lid. (→P.37)**

The charging inlet light will illuminate.

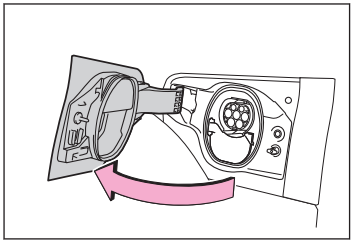

2 **Open the DC charging inlet cap.**

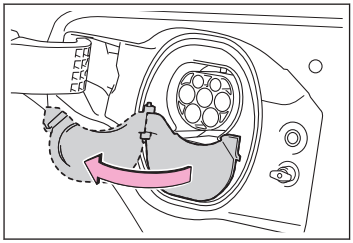

3 **Insert DC charging connector firmly and fully into the charging inlet**

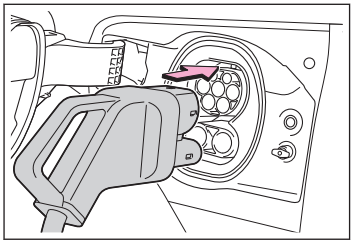

Insert the DC charging connector and it will lock automatically.

The DC charging connector shape and treatment will differ depending on the type of DC charger. Perform the operations in accordance to handling procedures of the DC charger.

4 **Operate the DC charger and start the charging.**

Follow the handling procedures of the DC charger to start charging.

Charging starts after a system check is done.

Stop the charging in accordance to the handling procedures of the DC charger when it is desired to interrupt the DC charging.

INFORMATION

When connecting the DC charging connector



If the door is opened or the power switch is turned to ON with the DC charging connector connected, the charging cable indicator turns on to notify that the DC charging connector is connected.

Charging time may increase when

→P.50

When the DC charging connector cannot be inserted into the DC charging inlet

→P.41

If a message indicating vehicle error on the DC charger side is displayed

Even if a message indicating vehicle error on the DC charger side (ex. vehicle error found, vehicle error occurred, etc.) is displayed, there is no vehicle fault but possibly a communication error between the DC charger and vehicle. In this case, there may be terminal damage (bad contact) in the DC charging connector. If there is no error with the vehicle, contact the facility manager of the DC charger.

During DC charging

- The current charging condition can be checked on the multi-information display.

- The actual charging time may differ from that displayed on the DC charger during charging.
- There may be occasions the radio cannot be heard due to noise occurrence during DC charging
- As the battery approaches full charge, the charging speed will decrease and it will take longer to complete charging.
- The time to complete charging may change, or charging may stop before reaching the upper limit of the charge capacity, due to the remaining charge of the traction battery, the outside temperature, the specifications of the charger (stand), etc.
- It is recommended to avoid frequent DC charging to prevent a decline in the traction battery capacity.
- Quickly move from the DC charging space for other users after the DC charging is completed.
- Depending on the specifications of DC charger used, charging may be stopped before fully charged.
- If DC charging is performed while the traction battery is extremely cold, such as in cold weather, steam may come out of the motor compartment or dew may be formed on the hood. This is because the heat, generated while the traction battery is warmed, causes snow, ice, or frost to evaporate. This is not a malfunction.
- The charge amount is corrected when the battery is fully charged, so 100% remaining drive battery may not be displayed.

■ How to set the DC charging power

You can change the DC charging power limit on the center display.*1 (→P.690)

- Max to 50kW

The maximum power when charging is limited to the selected power or less.

If Max is selected, the vehicle will be charged with the maximum power that can be charged.

■ Changing the [Charging Limit] settings

→P.54

⚠ WARNING

■ Warnings for DC charging

Be sure to observe the following when using DC charging.

Failure to do so may cause an accident that could lead to death or serious injury.

*1: The settings cannot be changed when the power switch is in ACC.

⚠ WARNING

- Check that the DC charger and DC charging inlet are not damaged. If there is any damage to the DC charging inlet, do not perform a DC charge and have it inspected immediately at your Lexus dealer.
- Do not touch the terminals of the DC charging connector or inlet with metallic sharp tips (wires and needles), or allow a short circuit to occur with foreign objects.
- Do not insert anything other than the DC charging connector into the DC charging inlet.
- Check that the DC charging cable is not coiled up or pinned underneath heavy objects.
- Be sure the DC charging inlet makes direct contact with the DC charging connector.

  Do not connect conversion adapters, extension cords, etc., between the DC charging connector and DC charging inlet.
- When DC charging is interrupted, follow the handling procedures of the DC charger. Immediately stop the DC charging when there is an outbreak of heat, smoke, strange noises or smells, etc., during charging.
- Check that the DC charging connector and DC charging inlet do not have foreign objects or snow or ice attached to it. If anything is attached to the inlet, be sure to completely remove the material before connecting the DC charging connector.
- Do not charge the vehicle when there is a possibility of lightning. If you notice lightning while charging the vehicle, do not touch the vehicle and the DC charging cable.
- Do not get the DC charging inlet terminals wet.
- Close the hood when using DC charging. The cooling fan may suddenly start to run. Keep hands and clothing (especially a tie, a scarf or a muffler) away from the fan. Failure to do so may cause the hands or clothing to be caught, resulting in serious injury.

When connecting the DC charging connector

Follow the handling procedures of the DC charger to connect the DC charging connector. If the connector is not connected properly, the system cannot recognize the connection, and it may be possible to start the EV system.

⚠ NOTICE

When using DC charging

Make sure to follow the handling procedures of the DC charger. If the procedures are not followed properly, the vehicle and the DC charger may be damaged.

After charging

1 **Operate the DC charger to stop the charging.**

DC charging connector will be unlocked automatically when charging is completed.

2 **Remove the DC charging connector.**

The DC charging connector shape and treatment will differ depending on the type of DC charger. Perform the operations in accordance to handling procedures of the DC charger.

Return the removed DC charging connector to its original position.

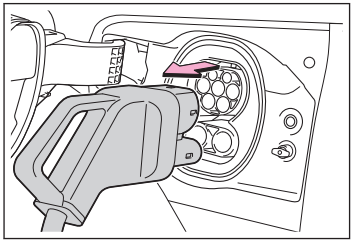

3 **Close the DC charging inlet cap, and then close the charging port lid.**

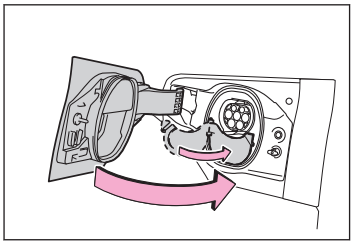

INFORMATION

■ If "Check Charging System Close Charging Port Lid See Owner's Manual" is displayed on the multi-information display

→P.584

■ When DC charging cannot be stopped

If charging cannot be stopped from the DC charger side due to a malfunction, etc.

You can also stop DC charging by pressing the door unlock button (on the electronic key, or driver's door) three times at 1 to 2 seconds intervals.

■ If the DC charging connector cannot be unlocked

→P.639

■ After DC charging

Even if the traction battery is charged to the upper limit value that is set, the level of charge displayed on the DC charger may be lower than the actual one.

⚠ WARNING

■ Caution after DC charging

After charging is completed, make sure to remove the DC charging connector from the DC charging inlet before starting the EV system.

If the vehicle is started off with the connector still connected, it could lead to an accident, possibly resulting in death or serious injury.

⚠ NOTICE

■ Caution after DC charging

Be sure to close the DC charging inlet cap to the DC charging inlet and then close the charging port lid after removing the DC charging connector from the inlet. If the DC charging inlet cap or charging port lid is not closed, foreign materials may get into the inlet and the EV system may be malfunctioning.

Using the charging schedule function

AC charging can be carried out at the desired time by registering the charging schedule.

INFORMATION

■ Calendar settings

The current date and time is automatically set using GPS. However, if the automatic setting of the clock is turned off on the center display, it will be necessary to manually set the date and time. For details, refer to the "Multimedia Owner's Manual".

If the calendar settings check screen is displayed when an attempt was made to register a charge schedule, check that the correct date is set. If it is incorrect, be sure to correct it.

If the calendar information is wrong, the charging schedule function will not operate normally.

Settings of the charging schedule function

When registering the charging schedule, the following settings can be changed.

■ Select the charging mode

One of the two following charging modes can be selected.

● [Start at set time]

Starts charging at the set time*1 and finishes charging when fully charged.

● [Start and stop at set times]

AC charging is performed according to the set start time and stop time.*1

■ Repeated setting

The periodic charging schedule can be set by selecting your desired day of the week. Select one or more day of the week to do the charging schedule.

■ Turning [Charge now] on and off

To start charging without changing the charging schedule setting, turn [**Charge now**] on to temporarily cancel the charging schedule and enable charging after connecting the AC charging connector.*2

*1: There might be a slight error in the timing when charging starts due to the state of the traction battery.

*2: If the charging connector is removed during charging while the charging schedule is registered and [**Charge now**] is on, [**Charge now**] turns off.

[Next charging event]

Of the registered charging schedules, the closest charging schedule after the current time is called the [**Next charging event**].

For charging schedule, AC charging will be performed according to the Next charging event.

Registering the charging schedule

The charging schedule can be registered on the center display. (→P.66)

INFORMATION

Charging schedule

- The charging schedule cannot be set while driving.
- A maximum of 15 charging schedules can be registered.

If the charging mode is set to [**Start and stop at set times**] and the start time and stop time are set to the same time, charging will be performed for 24 hours from the start time.

The charging schedule function cannot be used when using DC charging.

To make sure that the charging schedule function operates correctly

Check the following items.

- Adjust the clock to the correct time*1
- The calendar is set to the correct date*1
- Check that the power switch is turned off
- After registering the charging schedule, connect the AC charging connector

  The charging start time is determined based on the charging schedule at the time that the AC charging connector was connected.
- Connect the AC charging connector before the start time

  When the charging mode is set to [**Start at set time**], if you connect the AC charging connector after the set start time, the next charging schedule will be referenced.

  When the charging mode is [**Start and stop at set times**], if you connect the AC charging connector after the start time, charging will start immediately and charging will be performed until the stop time.
- After connecting the AC charging connector, check that the charging indicator of the charging port flashes (→P.39)
- Do not use an socket that has a power cut off function (including a timer function)

*1: For the setting procedure for the clock and calendar, refer to "Multimedia Owner's Manual".

Use an socket that constantly supplies electricity. For sockets where the power is cut off due to a timer function, etc., charging may not be carried out according to plan if the power is cut off during the set time.

■ **When the AC charging connector remains connected to the vehicle**

- When the charging mode is set to [**Start at set time**], even if multiple consecutive charging schedules are registered, the next charge will not be carried out according to the charging schedule until the AC charging connector is removed and reconnected after charging completes. Also, when the traction battery is fully charged, charging according to the charging schedule will not be carried out.
- If the charging stop time is reached before the traction battery is fully charged and the charging mode is set to [**Start and stop at set times**], the nearest charging schedule after the stop time is updated as the next charging schedule, and charging is repeated until the battery is fully charged.

■ **Smartphone-linked operation***

It may be necessary to use a smartphone with a dedicated app to change the charging settings.

■ **When charging schedules are ignored**

When the following operations are performed while the charging schedule is on standby, charging schedule is temporarily canceled and charging is started.

- When turning My Room Mode on (→P.71)
- When turning [**Charge now**] on (→P.69,70)
- When an operation that temporarily cancel charging using the charging schedule (→P.53)

■ **Battery heater (→P.42)/Battery Cooler (→P.42)**

Depending on the temperature of the traction battery, the traction battery heater or traction battery cooler may be activated and the charging indicator may light up while the timer is waiting for charging.

Setting operations on center display

Setting operations related to the charging schedule are performed on the charging schedule screen.

Displaying the charging schedule screen

1 With the power switch in ON, select  on the center display.*1

*: If equipped

*1: Charging schedule settings can be changed when the power switch is in ON.

2 Select [Charging schedule].

How to read the charging schedule screen

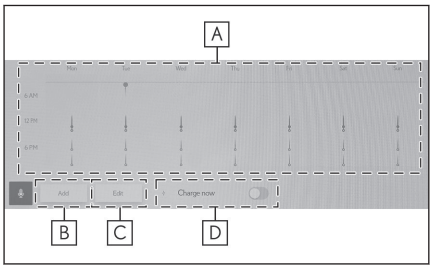

A Charging schedules

Displays the week-long registered charging schedule in a list using icons.

B [Add] switch

Select to add a new item to the charging schedule. (→P.67)

C [Edit] switch

Select to change or delete registered items on the charging schedule. (→P.68)

D [Charge now] switch

Each time the button is selected, [Charge now] switches between on and off. (→P.69)

Registering the charging schedule

1 Display the "Charging schedule" screen. (→P.66)

2 Select [Add].

The "Add event" screen will be displayed on the screen.

3 Change the schedule to the desired time.

● Charging mode

Select [Start at set time] or [Start and stop at set times] to set the desired charging mode.

- When [Start at set time] is selected

  Set the charging start time, and select [OK].

- When [Start and stop at set times] is selected

  Set the charging start time and stop time, and select [OK].

● Repeated settings

Select the day of the week and select [OK].

When turned on, the charging schedule is repeated on that day. It is possible to turn more than one day on.

4 **After setting operations are complete, press [Save].**

The charging schedule is registered and an icon is added to the schedule.

To cancel registration of the charging schedule, select ✕.

After setting operations are complete, when the power switch is turned off and the AC charging connector is connected to the vehicle, charging is carried out according to the charging schedule settings.

Switching charging schedules between on and off

1 **Display the charging schedule screen. (→P.66)**

2 **Press [Edit].**

The [**Events**] screen will be displayed on the screen.

3 **From the items displayed on the screen, select  or  in the row of the charging schedule you wish to change.**

If the charging schedule you wish to change is not displayed on the screen, scroll the list up and down to display it.

Each time the button is pressed, the charging schedule switches between on and off.

Changing the registered charging schedules

1 **Display the [Charging schedule] screen. (→P.66)**

2 **Press [Edit].**

The [**Events**] screen will be displayed on the screen.

3 **Press [Edit] on the [Events] screen.**

4 **From the items displayed on the screen, press the charging schedule you wish to change.**

- Changing registered items:

  Change the desired settings as described in step 3 to step 4 of the "Registering the charging schedule"(→P.67)

  When a setting is changed, its icon on the calendar also changes.

- Deleting registered items:

  Select [**Delete**].

  A deletion confirmation message will be displayed.

  Press [**Delete**] to delete the selected charging schedule.

To cancel deletion, press [**Cancel**] or the return button.

When a charging schedule is deleted, its icon is also deleted from the calendar.

Turning [Charge now] on

1 **Display the charging schedule screen. (→P.66)**

2 **Select  of [Charge now].**

Each time the button is pressed, [**Charge now**] switches between on and off.

After setting operations are complete, charging starts when the AC charging connector is connected.

Changing Next Event

When ACC customization is in on, the ending screen will not be disabled. ACC mode can be enabled/disabled on the customize menu. (→P.691)

Turn the power switch off.

Next event will be displayed according to the charging schedule settings.

- When press [**OK**], close Next charging event screen.
- When press [**Charge now**], charge now is turned on.

INFORMATION

When all charging schedules are turned off

The icon is not displayed on the charging schedule screen.

The icon will be displayed by turning it ON on the [**Events**] screen.

When charging schedule setting operations are canceled

When the vehicle is in the following conditions, charging schedule setting operations are canceled.

- The power switch is turned off before the settings are confirmed
- The vehicle starts off
- A display with a higher priority than that of the charging schedule setting is shown

[Next charging event]

After charging completes, the [**Next charging event**] on the display will not change until the AC charging cable is removed, after charging is performed according to the [**Next charging event**].

NOTICE

While performing the setting operation

When performing the setting operation while the EV system is stopped, be careful that the 12-volt battery will not be discharged.

Setting operations on multi-information display

Setting [Charge Now] to on

1 Turn the power switch off.

The closing display screen is displayed on the multi-information display.

(If the door is opened while waiting for charging schedule, the same screen will be displayed.)

2 Vehicles without a head-up display: Press OK of the meter control switch.*1

Vehicles with a head-up display: Press the steering wheel switch at the position where [Yes] is displayed on the multi-information display.

After setting operations are complete, charging starts when the AC charging connector is connected.

INFORMATION

When the power switch is turned off

When the power switch is turned off, the charging schedule (next scheduled charging) will be displayed on the closing display and the registered details can be checked.*2

NOTICE

While performing the setting operation

When performing the setting operation while the EV system is stopped, be careful that the 12-volt battery will not be discharged.

*1: Each time OK is pressed, [Charge Now] will turn on/off.

*2: The closing display screen may not be displayed during charging.

Using My Room Mode

When the charging cable is connected to the vehicle, electrical components such as the air conditioning system and audio system can be used by the power supply from an external power source.

Starting My Room Mode

1 **Connect the charge cable to the vehicle to start charging.**

AC Charging: →P.51

DC Charging: →P.58

2 **Turn the power switch to ON while charging.**

My Room Mode settings is automatically displayed on the center display.

3 **Select [Yes].**

My Room Mode is started and it is possible to use the air conditioning system, audio system, etc.

When not using My Room Mode, select [**No**].

To disable My Room Mode, turn the power switch off.

My Room Mode will automatically be off when DC charging is completed.

INFORMATION

■ When a door is unlocked while using My Room Mode

If a door is unlocked while using My Room Mode, the AC charging connector will be unlocked and My Room Mode will be stopped. In order to use My Room Mode again, lock the doors or reconnect the AC charging cable and start My Room Mode (→P.71). When using My Room Mode with public charging station, operation to start charging using the charger may be required again before starting My Room Mode.

■ Meter display while charging

After turning the power switch to ON while charging, the power switch automatically turns off if My Room Mode is not selected within approximately 100 seconds.

■ While charging

- When the remaining charge of the traction battery drops to the lower limit, the air conditioning system automatically stops. In that case, the air conditioning system cannot operate until the remaining charge of the traction battery increases. Turn off the power switch once, then use My Room Mode after the remaining charge of the traction battery increases.
- The charging time of the traction battery gets longer.

- Noise may be heard from the radio depending on conditions of the radio wave.
- The surrounding area of the onboard traction battery charger in the motor compartment may become hot.
- The electric power steering system warning light (yellow) may turn on, but this is not a malfunction.

Using My Room Mode during DC charging

When using My Room mode during DC charging, the amount of charge at the time of charge completion will be lower than when not using it.

In addition, when DC charging in an environment with low outside temperatures and high humidity, the air conditioner prioritizes dehumidification of the vehicle interior. This may lead to even lower charge at the time of completion.

When prioritizing the amount of charge, turn off the cooling and dehumidification functions. (→P.216,248)

When a charging schedule is registered

When My Room Mode starts while the charging schedule is on standby, charging schedules are ignored and charging starts.

⚠ WARNING

Warnings for using My Room Mode

Observe the following precautions.

Failure to do so may result in death or a serious health hazard.

- Do not leave children, people who need care, or pets inside the vehicle. The temperature inside the vehicle may become high or low due to features such as the automatic shut-off. The children, people who need care, or pets left inside the vehicle may suffer heatstroke dehydration or hypothermia. Also, since the wipers, etc., can be operated, there may be accidental operation, possibly leading to an accident.
- Use the mode after sufficiently checking the vicinity of the vehicle for safety hazards.

Riding with children

Observe the following precautions when children are in the vehicle.Use a child restraint system appropriate for the child, until the child becomes large enough to properly wear the vehicle's seat belt.

- It is recommended that children sit in the rear seats to avoid accidental contact with the rotary shifter, wiper switch, etc.
- Use the rear door child-protector lock or the window lock switch to avoid children opening the door while driving or operating the power window accidentally. (→P.73,123)
- Do not let small children operate equipment which may catch or pinch body parts, such as the power window, hood, back door, seats etc.

⚠ WARNING

■ When children are in the vehicle

Never leave children unattended in the vehicle, and never allow children to have or use the key.

Children may be able to start the vehicle or shift the vehicle into neutral. There is also a danger that children may injure themselves by playing with the windows, or other features of the vehicle. In addition, heat build-up or extremely cold temperatures inside the vehicle can be fatal to children.

Preventing the rear doors from being opened from the inside of the vehicle (child-protector lock)

The door cannot be opened from inside the vehicle when the lock is set.

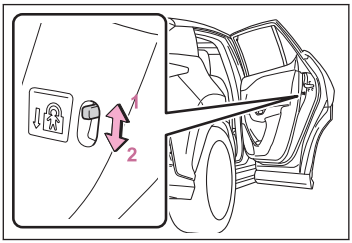

1 Unlock
2 Lock

These locks can be set to prevent children from opening the rear doors. Push down on each rear door switch to lock both rear doors.

INFORMATION

Door opening method when using a child-protector lock

Unlock the door and press the door opener switch of the door handle and open the door. If it is necessary to open the door from inside the vehicle, open the rear side window and press the door opener switch of the door handle and open the door.

Child restraint systems

Before installing a child restraint system in the vehicle, there are precautions that need to be observed, different types of child restraint systems, as well as installation methods, etc., written in this manual.

Use a child restraint system when riding with a small child that cannot properly use a seat belt. For the child's safety, install the child restraint system to a rear seat. Be sure to follow the installation method that is in the operation manual enclosed with the restraint system.

Table of contents

Points to remember: P.75

When using a child restraint system: P.76

Child restraint system compatibility for each seating position: P.78

Child restraint system installation method

- Fixed with a seat belt: P.84
- Fixed with an ISOFIX rigid anchor: P.85
- Using a child restraint anchor fitting: P.87

Points to remember

- Prioritize and observe the warnings, as well as the laws and regulations for child restraint systems.
- Use a child restraint system until the child becomes large enough to properly wear the vehicle's seat belt.
- Choose a child restraint system appropriate to the age and size of the child.
- Note that not all child restraint systems can fit in all vehicles. Before using or purchasing a child restraint system, check the compatibility of the child restraint system with seat positions. (→P.78)

⚠ WARNING

■ When a child is riding

Observe the following precautions.

Failure to do so may result in death or serious injury.

- For effective protection in automobile accidents and sudden stops, a child must be properly restrained, using a seat belt or child restraint system which is correctly

⚠ WARNING

installed. For installation details, refer to the operation manual enclosed with the child restraint system. General installation instruction is provided in this manual.

- Lexus strongly urges the use of a proper child restraint system that conforms to the weight and size of the child, installed on the rear seat. According to accident statistics, the child is safer when properly restrained in the rear seat than in the front seat.
- Holding a child in your or someone else's arms is not a substitute for a child restraint system. In an accident, the child can be crushed against the windshield or between the holder and the interior of the vehicle.

■ Handling the child restraint system

If the child restraint system is not properly fixed in place, the child or other passengers may be seriously injured or even killed in the event of sudden braking, sudden swerving, or an accident.

- If the vehicle were to receive a strong impact from an accident, etc., it is possible that the child restraint system has damage that is not readily visible. In such cases, do not reuse the restraint system.
- Depending on the child restraint system, installation may be difficult or impossible. In those cases, check whether the child restraint system is suitable for installment in the vehicle. (→P.78) Be sure to install and observe the usage rules after carefully reading the child restraint system fixing method in this manual, as well as the operation manual enclosed with the child restraint system.
- Keep the child restraint system properly secured on the seat even if it is not in use. Do not store the child restraint system unsecured in the passenger compartment.
- If it is necessary to detach the child restraint system, remove it from the vehicle or store it securely in the luggage compartment.

When using a child restraint system

■ When installing a child restraint system to a front passenger seat

For the safety of a child, install child restraint systems to a rear seats. When installing child restraint system to a front passenger seat is unavoidable, adjust the seat as follows and install the child restraint system.

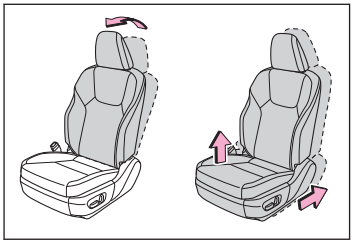

- Move the seat fully rearward.
- Move the seat height to the upper most position.
- Adjust the seatback angle to the most upright position.

  If there is a gap between the child seat and the seatback, adjust the seatback angle until good contact is achieved.
- If the head restraint interferes with your child restraint system, and the head restraint can be removed, remove the head restraint.

  Otherwise, put the head restraint in the upper most position.

⚠ WARNING

■ When using a child restraint system

Observe the following precautions.

Failure to do so may result in death or serious injury.



- Extreme Hazard! Do not use a rearward facing child restraint on a seat protected by an airbag in front of it! This is because the force of the rapid inflation of the front passenger airbag can cause death or serious injury to the child.There is a label(s) on the passenger side sun visor, indicating it is forbidden to attach a rear-facing child restraint system to the front passenger seat.Details of the label(s) are shown in the illustration below.



⚠ WARNING

- Only put a forward-facing child restraint system on the front seat when unavoidable. When installing a forward-facing child restraint on the front passenger seat, move the seat as far back as possible. Failing to do so may result in death or serious injury if the airbags deploy (inflate).



- Do not allow the child to lean his/her head or any part of his/her body against the door or the area of the seat, front or rear pillars, or roof side rails from which the SRS side airbags or SRS curtain shield airbags deploy even if the child is seated in the child restraint system. It is dangerous if the SRS side airbags and curtain shield airbags inflate, and the impact could cause death or serious injury to the child.



- When a junior seat (booster seat) is installed, always ensure that the shoulder belt is positioned across the center of the child's shoulder. The belt should be kept away from the child's neck, but not so that it could fall off the child's shoulder.
- Use child restraint system suitable to the age and size of the child and install it to the rear seat.
- If the driver's seat interferes with the child restraint system and prevents it from being attached correctly, attach the child restraint system to the left-hand rear seat.



- Adjust the front passenger seat so that it does not interfere with the child restraint system.

Child restraint system compatibility for each seating position

Child restraint system compatibility for each seating position

Compatibility of each seating position with child restraint systems (→P.80) displays the type of child restraint systems that can be used and possible seating positions for installation using symbols. Check the selected child restraint system

together with the following [Before confirming the compatibility of each seating position with child restraint systems].

Before confirming the compatibility of each seating position with child restraint systems

1 **Checking the child restraint system standards. Use a child restraint system that conforms to UN(ECE) R44[*1] or UN(ECE) R129[*1*2]. The following approval mark is displayed on child restraint systems which are conformed. Check for an approval mark attached to the child restraint system.**

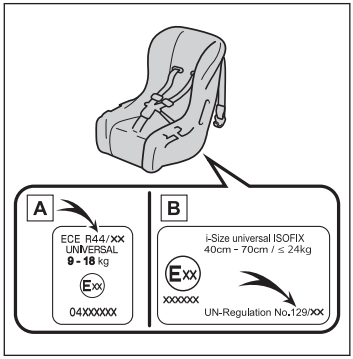

Example of the displayed regulation number

A UN(ECE) R44 approval mark[*3]

The weight range of the child who is applicable for an UN(ECE) R44 approval mark is indicated.

B UN(ECE) R129 approval mark[*3]

The height range of the child who is applicable as well as available weights for an UN(ECE) R129 approval mark is indicated.

2 **Checking the category of the child restraint system. Check the approval mark of the child restraint system for which of the following categories the child restraint system is suitable. Also, if there are any uncertainties, check the user's guide included with the child restraint system or contact the retailer of the child restraint system.**

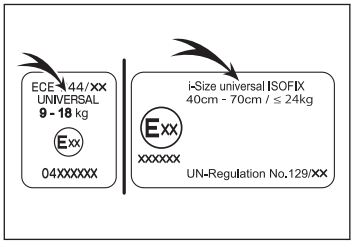

- "universal"
- "semi-universal"
- "restricted"
- "vehicle specific"

*1: UN(ECE) R44 and UN(ECE) R129 are U.N. regulations for child restraint systems.

*2: The child restraint systems mentioned in the table may not be available outside of the EU area.

*3: The displayed mark may differ depending on the product.

Compatibility of each seating position with child restraint systems

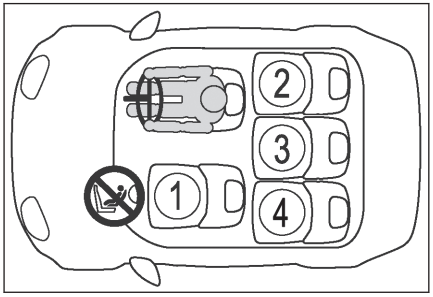

1 (1)(2)(3)	U (4)
2 (2)(3)	U  
3 (2)(3)	U 
4 (2)(3)	U  

(1) Move the front seat fully rearward. If the passenger seat height can be adjusted, move it to the upper most position.

(2) Adjust the seatback angle to the most upright position. When installing a forward-facing child seat, if there is a gap between the child seat and the seatback, adjust the seatback angle until good contact is achieved.

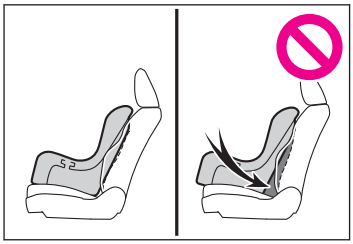

(3) If the head restraint interferes with your child restraint system, and the head restraint can be removed, remove the head restraint.Otherwise, put the head restraint in the upper most position.

(4) Use only a front-facing child restraint system.



Suitable for "universal" category child restraint system fixed with the seat belt.



Suitable for i-Size and ISOFIX child restraint system.



Includes a top tether anchorage point.



Never use a rear-facing child restraint system on the front passenger seat.

Detail information for child restraint systems installation

Seating position				
Seat position number	①	②	③	④
Seating position suitable for universal belted (Yes/No)	Yes Forward-facing only	Yes	Yes	Yes
i-Size seating position (Yes/No)	No	Yes	No	Yes
Seating position suitable for lateral fixture (L1/L2/No)	No	No	No	No
Suitable rearward facing fixture (R1/R2X/R2/R3/No)	No	R1, R2X, R2, R3	No	R1, R2X, R2, R3
Suitable forward facing fixture (F2X/F2/F3/No)	No	F2X, F2, F3	No	F2X, F2, F3
Suitable junior seat fixture (B2/B3/No)	No	B2, B3	No	B2, B3

ISOFIX child restraint systems are divided into different "fixture". The child restraint system can be used in the seating positions for "fixture" mentioned in the table above. For kind of "fixture" relation, confirm the following table.

If your child restraint system has no kind of "fixture" (or if you cannot find information in the table below), please refer to the child restraint system "vehicle list" for compatibility information or ask the retailer of your child seat.

Fixture	Description
F3	Full-height, forward-facing child restraint systems
F2	Reduced-height forward-facing child restraint systems
F2X	Reduced-height forward-facing child restraint systems
R3	Full-size, rearward-facing child restraint systems
R2	Reduced-size, rearward-facing child restraint systems
R2X	Reduced-size, rearward-facing child restraint systems
R1	Rearward-facing infant seat
L1	Left lateral-facing (carrycot) infant seat
L2	Right lateral-facing (carrycot) infant seat
B2	Junior seat
B3	Junior seat

When securing some types of child restraint systems in rear seat, it may not be possible to properly use the seat belts in positions next to the child restraint without interfering with it or affecting seat belt effectiveness. Be sure your seat belt fits snugly across your shoulder and low on your hips. If it does not, or if it interferes with the child restraint, move to a different position. Failure to do so may result in death or serious injury.

- When installing a child restraint in the rear seats, adjust the front seat so that it does not interfere with the child or child restraint system.
- When installing a child seat with support base, if the child seat interferes with the seatback when latching it into the support base, adjust the seatback rearward until there is no interference.
- If the seat belt shoulder anchor is ahead of the child seat belt guide, move the seat cushion forward.

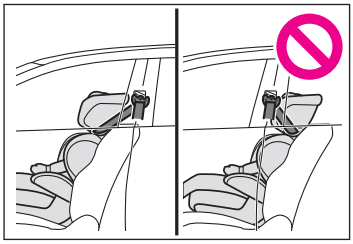

● When installing a junior seat, if the child in your child restraint system is in a very upright position, adjust the seatback angle to the most comfortable position. And if the seat belt shoulder anchor is ahead of the child seat belt guide, move the seat cushion forward.

Child restraint system installation method

Confirm with the operation manual enclosed with the child restraint system about the installation of the child restraint system.

Installation method		Page
Seat belt attachment	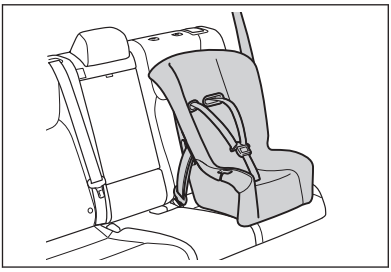	P.84
ISOFIX rigid anchor attachment		P.85
Child restraint anchor fitting attachment	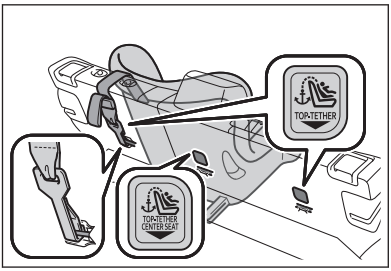	P.87

Child restraint system fixed with a seat belt

Installing child restraint system using a seat belt

Install the child restraint system in accordance to the operation manual enclosed with the child restraint system.

If the child restraint system on hand is not within the "universal" category (or the necessary information is not in the table), refer to the "Vehicle List" provided by the child restraint system maker for various possible installation positions, or check the compatibility after asking the retailer of the child seat. (→P.78)

1 If installing the child restraint system to the front passenger seat is unavoidable, refer to P.76 for the front passenger seat adjustment.

2 Adjust the seatback angle to the most upright position.

When installing a forward-facing child seat, if there is a gap between the child seat and the seatback, adjust the seatback angle until good contact is achieved.

3 If the head restraint interferes with the child restraint system installation and the head restraint can be removed, remove the head restraint. Otherwise, put the head restraint in the upper most position. (→P.147)

4 Run the seat belt through the child restraint system and insert the plate into the buckle. Make sure that the belt is not twisted. Securely fix the seat belt to the child restraint system in accordance to the directions enclosed with the child restraint system.

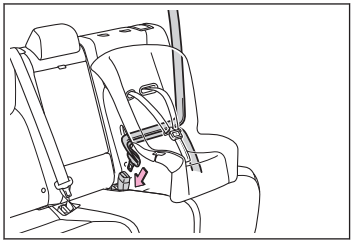

5 If your child restraint system is not equipped with a lock-off (a seat belt locking feature), secure the child restraint system using a locking clip.

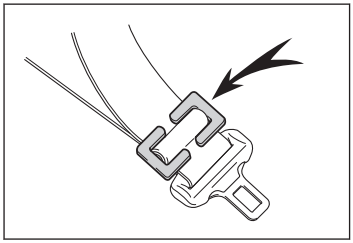

6 After installing the child restraint system, rock it back and forth to ensure that it is installed securely. (→P.84)

Removing a child restraint system installed with a seat belt

Press the buckle release button and fully retract the seat belt.

When releasing the buckle, the child restraint system may spring up due to the rebound of the seat cushion. Release the buckle while holding down the child restraint system.

Since the seat belt automatically reels itself, slowly return it to the stowing position.

INFORMATION

When installing a child restraint system

You may need a locking clip to install the child restraint system. Follow the instructions provided by the manufacturer of the system. If your child restraint system does not provide a locking clip, you can purchase the following item from your Lexus dealer: Locking clip for child restraint system (Part No. 73119-22010)

⚠ WARNING

When installing a child restraint system

Observe the following precautions. Failure to do so may result in death or serious injury.

- Do not allow children to play with the seat belt. If the seat belt becomes twisted around a child's neck, it may lead to choking or other serious injuries that could result in death. If this occurs and the buckle cannot be unfastened, scissors should be used to cut the belt.
- Ensure that the belt and plate are securely locked and the seat belt is not twisted.
- Shake the child restraint system left and right, and forward and backward to ensure that it has been securely installed.
- After securing a child restraint system, never adjust the seat.
- When a junior seat (booster seat) is installed, always ensure that the shoulder belt is positioned across the center of the child's shoulder. The belt should be kept away from the child's neck, but not so that it could fall off the child's shoulder.
- Follow all installation instructions provided by the child restraint system manufacturer.

Child restraint system fixed with an ISOFIX rigid anchor

ISOFIX rigid anchors (ISOFIX child restraint system)

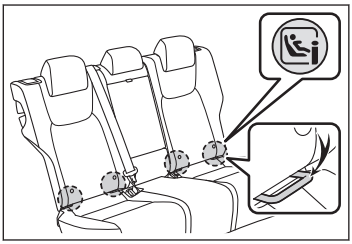

Lower anchors are provided for the outboard seats. (Buttons displaying the location of the anchors are attached to the seats.)

Installation with ISOFIX rigid anchor (ISOFIX child restraint system)

Install the child restraint system in accordance to the operation manual enclosed with the child restraint system.

If the child restraint system on hand is not within the "universal" category (or the necessary information is not in the table), refer to the "Vehicle List" provided by the child restraint system maker for various possible installation positions, or check the compatibility after asking the retailer of the child seat. (→P.78)

1 **Adjust the seatback angle to the most upright position.**

When installing a forward-facing child seat, if there is a gap between the child seat and the seatback, adjust the seatback angle until good contact is achieved.

2 **If the head restraint interferes with the child restraint system installation and the head restraint can be removed, remove the head restraint. Otherwise, put the head restraint in the upper most position. (→P.147)**

3 **Check the positions of the exclusive fixing bars, and install the child restraint system to the seat.**

The bars are installed in the clearance between the seat cushion and seatback.

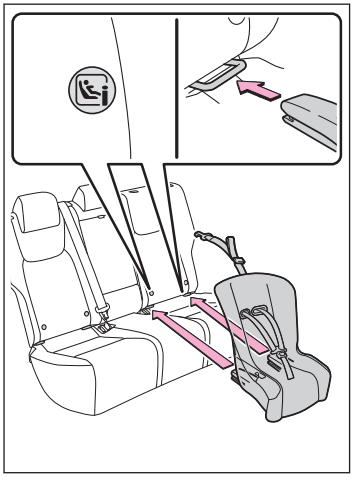

4 **After installing the child restraint system, rock it back and forth to ensure that it is installed securely. (→P.85)**

⚠ WARNING

■ When installing a child restraint system

Observe the following precautions.

Failure to do so may result in death or serious injury.

- After securing a child restraint system, never adjust the seat.

⚠ WARNING

- When using the lower anchors, be sure that there are no foreign objects around the anchors and that the seat belt is not caught behind the child restraint system.
- Follow all installation instructions provided by the child restraint system manufacturer.

■ Using child restraint anchorages

WARNING: child restraint anchorages are designed to withstand only those loads imposed by correctly fitted child restraints. Under no circumstances are they to be used for adult seatbelts, harnesses, or for attaching other items or equipment to the vehicle.

Using a child restraint anchor fitting

Child restraint anchor fitting

Anchor fittings are provided for each rear seat.

Use anchor fittings when fixing the top strap.

▶ **Outboard rear seats**

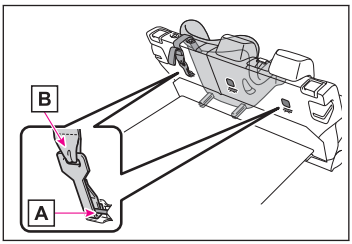

A Anchor fittings
B Upper anchorage strap

▶ **Rear center seat**

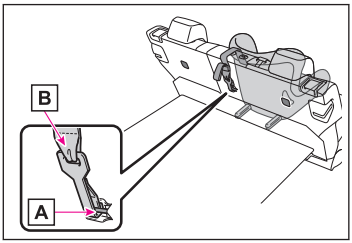

A Anchor fittings
B Upper anchorage strap

Fixing the strap to the anchor fitting

Install the child restraint system in accordance to the operation manual enclosed with the child restraint system.

1 **Remove the head restraint if it interferes with your child restraint system. (→P.147)**

If the head restraint cannot be removed, raise it to the uppermost position.

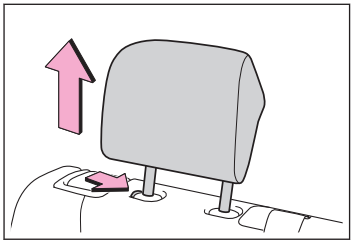

2 **Latch the attaching clip onto the anchor fitting and tighten the upper anchorage strap.**

Make sure the upper anchorage strap is securely latched. (→P.84)

When installing the child restraint system with the head restraint being raised, be sure to have the upper anchorage strap pass underneath the head restraint.

▶ **Outboard rear seats**

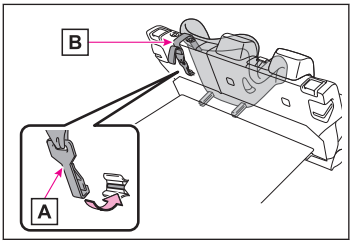

A Attaching clip
B Upper anchorage strap

▶ **Rear center seat**

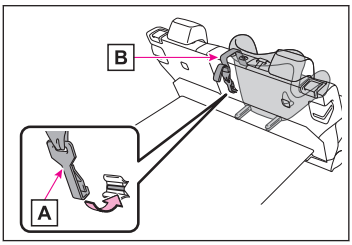

A Attaching clip
B Upper anchorage strap

⚠ WARNING

■ When installing a child restraint system

Observe the following precautions.

Failure to do so may result in death or serious injury.

- Firmly attach the upper anchorage strap and make sure that the belt is not twisted.
- Do not attach the upper anchorage strap to anything other than the anchor fitting of the seat the child restraint system is installed to.

⚠ WARNING

- After securing a child restraint system, never adjust the seat.
- Follow all installation instructions provided by the child restraint system manufacturer.
- When installing the child restraint system with the head restraint being raised, after the head restraint has been raised and then the anchor fitting has been fixed, do not lower the head restraint.

Using child restraint anchorages

WARNING: child restraint anchorages are designed to withstand only those loads imposed by correctly fitted child restraints. Under no circumstances are they to be used for adult seatbelts, harnesses, or for attaching other items or equipment to the vehicle.

Key types

The following keys are provided with the vehicle.

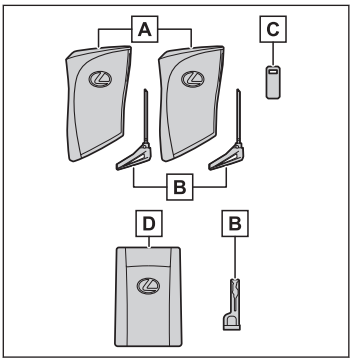

A Electronic keys

- Operating the smart entry & start system (→P.94)
- Operating the wireless remote control function (→P.103)

B Mechanical keys

C Key number plate

D Card key (electronic key)*

Operating the smart entry & start system (→P.94)

⚠ NOTICE

■ To prevent key damage

Observe the following precautions

- Do not drop the keys, subject them to strong shocks or bend them.
- Do not expose the keys to high temperatures for long periods of time.
- Do not get the keys wet or wash them in an ultrasonic washer, etc.
- Do not attach metallic or magnetic materials to the keys or place the keys close to such materials.
- Do not disassemble the keys.
- Do not attach a sticker or anything else to the surface of the electronic key.
- Do not place the keys near objects that produce magnetic fields, such as TVs, audio systems and induction cookers.
- Do not place the keys near medical electrical equipment such as low-frequency therapy equipment or microwave therapy equipment, and do not receive medical attention with the keys on your person.

■ Carrying the electronic key on your person

Carry the electronic key 10 cm (3.9 in.) or more away from electric appliances that are turned on. Radio waves emitted from electric appliances within 10 cm (3.9 in.) of the electronic key may interfere with the key, causing the key to not function properly.

*: If equipped

NOTICE

Handling the card key

- If the battery or card key terminals get wet, the battery may corrode and the card key may stop working.If the key is dropped into water, or if drinking water, etc., is spilled on the key, immediately remove the battery cover and wipe the battery and terminals. (To remove the battery cover, lightly grasp and pull it.) If the battery is corroded, have your Lexus dealer replace the battery.
- Do not crush the battery cover or use a screwdriver to remove the battery cover. Forcibly removing the battery cover may bend or damage the key.
- If the battery cover is frequently removed, the battery cover may become loose.
- When installing the battery, make sure to check the direction of the battery.Installing the battery in the wrong direction may cause the battery to deplete rapidly.
- The surface of the card key may be damaged, or its coating may peel off in the following situations:
  - The card key is carried together with hard objects, such as coins and keys.
  - The card key is scraped with a sharp object, such as the tip of a mechanical pencil.
  - The surface of the card key is wiped with thinner or benzene.

INFORMATION

Handling the card key

- The mechanical key that is stored inside the card key should be used only if a problem arises, such as when the card key does not operate properly.
- If the battery cover is not installed and the battery falls out or if the battery was removed because the key got wet, reinstall the battery with the positive terminal facing the Lexus emblem.



- The card key is not waterproof.

When riding in an aircraft

When bringing an electronic key onto an aircraft, make sure you do not press any buttons on the electronic key while inside the aircraft cabin. If you are carrying an electronic key in your bag, etc., ensure that the buttons are not likely to be pressed accidentally. Pressing a button may cause the electronic key to emit radio waves that could interfere with the operation of the aircraft.

Electronic key battery depletion

- The standard battery life is 1 to 2 years. (The card key battery life is from one year to one year and a half.)
- If the battery becomes low, an alarm will sound in the cabin when the EV system stops.
- As the electronic key always receives radio waves, the battery will become depleted even if the electronic key is not used. The following symptoms indicate that the electronic key battery may be depleted. Replace the battery when necessary.
  - The smart entry & start system or the wireless remote control does not operate.
  - The detection area becomes smaller.
  - The LED indicator on the key surface does not turn on.
- You can replace the battery by yourself (→P.619). However, as there is a danger that the electronic key may be damaged, it is recommended that replacement is carried out by your Lexus dealer.
- To avoid serious deterioration, do not leave the electronic key within 1 m (3 ft.) of the following electrical appliances that produce a magnetic field:
  - TVs
  - Personal computers
  - Cellular phones, cordless phones and battery chargers
  - Table lamps
  - Induction cookers

Battery-saving function

The battery-saving function will be activated in order to prevent the electronic key battery and the 12-volt battery from being discharged while the vehicle is not in operation for a long time.

- In the following situations, the smart entry & start system may take some time to unlock the doors.
  - The electronic key has been left in an area of approximately 3.5 m (11 ft.) of the outside of the vehicle for 10 minutes or longer.
  - The smart entry & start system has not been used for 5 days or longer.
- If the smart entry & start system has not been used for 14 days or longer, the doors cannot be unlocked at any doors except the driver's door. In this case, take hold of the driver's door handle, or use the wireless remote control or the mechanical key, to unlock the doors.

Electronic key battery-saving mode



- When battery-saving mode is set, battery depletion is minimized by stopping the electronic key from receiving radio waves.

  While pressing and holding on the electronic key, press twice. The indicator on the electronic key will flash 4 times and battery-saving mode will be entered.

  The smart entry & start system cannot be used while the electronic key is in battery-saving mode. Battery saving mode can be cancelled by pressing any switch on the electronic key.

- Electronic keys that will not be used for long periods of time can be set to the battery-saving mode in advance.

When electronic key function stops

If the position of the electronic key has not changed for a certain amount of time such as when the electronic key is left somewhere, the function of the electronic key stops to reduce depletion of the battery.

Confirmation of the registered key number

The number of keys already registered to the vehicle can be confirmed. Ask your Lexus dealer for details.

Smart entry & start system

⚠ WARNING

■ Affects influenced by the radio wave (Affect from the Smart entry & start system antennas)

- People with implantable cardiac pacemakers, cardiac resynchronization therapy-pacemakers or implantable cardioverter defibrillators should maintain a reasonable distance between themselves and the smart entry & start system antennas. The radio waves may affect the operation of such devices. If necessary, the entry function can be disabled. Ask your Lexus dealer for details, such as the frequency of radio waves and timing of the emitted radio waves. Then, consult your doctor to see if you should disable the entry function.
- Users of any electrical medical device other than implantable cardiac pacemakers, cardiac resynchronization therapy-pacemakers or implantable cardioverter defibrillators should consult the manufacturer of the device for information about its operation under the influence of radio waves. Radio waves could have unexpected effects on the operation of such medical devices.

Ask your Lexus dealer for details on disabling the entry function.

INFORMATION

■ Antenna location

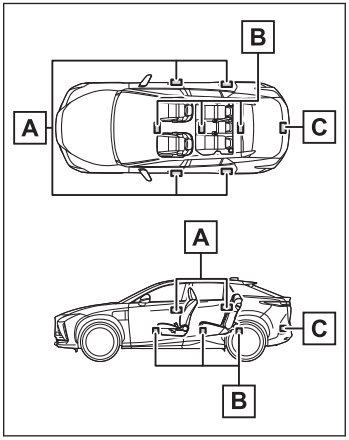

A Antennas outside the cabin
B Antennas inside the cabin
C Antenna outside the luggage compartment

Effective range (areas within which the electronic key is detected)



A When locking or unlocking the doors

The system can be operated when the electronic key is within about 0.7 m (2.3 ft.) of an outside door handle. (Only the doors detecting the key can be operated.)

B When starting the EV system or changing power switch modes

The system can be operated when the electronic key is inside the vehicle.

If an alarm sounds or a warning message is displayed

A combination of exterior and interior alarms as well as warning messages shown on the multi-information display are used to prevent theft of the vehicle and accidents resulting from erroneous operation. Take appropriate measures in response to any warning message on the multi-information display. (→P.577)

The following table describes situations and correction procedures when only an alarm sounds.

- When an exterior alarm sounds once for 5 seconds

  Situation: An attempt was made to lock the vehicle while a door was open.

  Correction procedure: Close all of the doors and lock the doors again.

- When an interior alarm pings repeatedly

  Situation: The power switch was turned to ACC while the driver's door was open (The driver's door was opened when the power switch was in ACC).

  Correction procedure: Turn the power switch off and close the driver's door.

Conditions affecting operation

The smart entry & start system, wireless remote control and immobilizer system use weak radio waves. In the following situations, the communication between the electronic key and the vehicle may be affected, preventing the smart entry & start system, wireless remote control and immobilizer system from operating properly. (Ways of coping:→P.623)

- When the electronic key battery is depleted
- Near a TV tower, electric power plant, gas station, radio station, large display, airport or other facility that generates strong radio waves or electrical noise
- When the electronic key is in contact with, or is covered by the following metallic objects
  - Cards to which aluminum foil is attached

- Cigarette boxes that have aluminum foil inside
- Metallic wallets or bags
- Coins
- Hand warmers made of metal
- Media such as CDs and DVDs

● When other wireless keys (that emit radio waves) are being used nearby

● When carrying the electronic key together with the following devices that emit radio waves

- Portable radio, cellular phone, cordless phone or other wireless communication devices
- Another vehicle's electronic key or a wireless key that emits radio waves
- Personal computers or personal digital assistants (PDAs)
- Digital audio players
- Portable game systems

● If window tint with a metallic content or metallic objects are attached to the rear window

● When the electronic key is placed near a battery charger or electronic devices

● When the vehicle is parked in a pay parking spot where radio waves are emitted

If the doors cannot be locked/unlocked using the smart entry & start system, lock/unlock the doors by performing any of the following:

● Bring the electronic key close to either front door handle and operate the entry function.

● Operate the wireless remote control. If the doors cannot be locked/unlocked using the above methods, use the mechanical key. (→P.623)

If the EV system cannot be started using the smart entry & start system, refer to P.595.

■ Note for the entry function

● Even when the electronic key is within the effective range (detection areas), the system may not operate properly in the following cases:

- The electronic key is too close to the window or outside door handle, near the ground, or in a high place when the doors are locked or unlocked.
- The electronic key is on the instrument panel, luggage cover or floor, or in the door pockets when the EV system is started or power switch modes are changed.

● Do not leave the electronic key on top of the instrument panel or near the door pockets when exiting the vehicle. Depending on the radio wave reception conditions,

it may be detected by the antenna outside the cabin and the door will become lockable from the outside, possibly trapping the electronic key inside the vehicle.

- As long as the electronic key is within the effective range, the doors may be locked or unlocked by anyone. However, only the doors detecting the electronic key can be used to unlock the vehicle.
- Even if the electronic key is not inside the vehicle, it may be possible to start the EV system if the electronic key is near the window.
- The doors may unlock if a large amount of water splashes on the door handle, such as in the rain or in a car wash when the electronic key is within the effective range. (The door will automatically be locked after approximately 30 seconds if the doors are not opened and closed.)
- If the wireless remote control is used to lock the doors when the electronic key is near the vehicle, there is a possibility that the door may not be unlocked by the entry function. (Use the wireless remote control to unlock the doors.)
- Touching the door lock sensor while wearing gloves may delay or prevent lock operation. Remove the gloves and touch the lock sensor again.
- When the lock operation is performed using the lock sensor, recognition signals will be shown up to two consecutive times. After this, no recognition signals will be given.
- If the door handle becomes wet while the electronic key is within the effective range, the door may lock and unlock repeatedly. In that case, follow the following correction procedures to wash the vehicle:
  - Place the electronic key in a location 2 m (6 ft.) or more away from the vehicle. (Take care to ensure that the key is not stolen.)
  - Set the electronic key to battery-saving mode to disable the smart entry & start system.
- If the electronic key is inside the vehicle and a door handle becomes wet during a car wash, a message may be shown on the multi-information display and a buzzer will sound outside the vehicle. To turn off the alarm, lock all the doors.
- The lock sensor may not work properly if it comes into contact with ice, snow, mud. Clean the lock sensor and attempt to operate it again.
- A sudden approach to the effective range or door handle may prevent the doors from being unlocked. In this case, return the door handle to the original position and check that the doors unlock before pulling the door handle again.
- If there is another electronic key in the detection area, it may take slightly longer to unlock the doors after the door handle is gripped.

When the vehicle is not driven for extended periods

- To prevent theft of the vehicle, do not leave the electronic key within 2 m (6 ft.) of the vehicle.

- The smart entry & start system can be deactivated in advance.
- Setting the electronic key to battery-saving mode helps to reduce key battery depletion.

To operate the system properly

Make sure to carry the electronic key when operating the system. Do not get the electronic key too close to the vehicle when operating the system from the outside of the vehicle.

Depending on the position and holding condition of the electronic key, the key may not be detected correctly and the system may not operate properly. (The alarm may go off accidentally, or the door lock prevention may not operate.)

Customization

Some functions can be customized. (→P.677)

Opening/closing the doors

⚠ WARNING

■ Precautions for when driving

Observe the following precautions while driving.

- Make sure that all of the doors are closed and locked.
- Do not press an inside door opener switch while driving.

  Be especially careful with the driver's door, as it can be opened even when the doors are locked.
- When a child is riding in a rear seat, set the child protector locks to prevent the rear doors from being opened from inside the vehicle.

■ Precautions for when opening or closing a door

When closing a door, swing it closed with slight force applied to it. If you press on the door by hand to close it, it may not be closed completely.

When opening or closing a door, check the surrounding area and hold the door handle tightly.

- When on a slope
- When the space between a door and a wall, etc. is small
- When in an area with strong winds

INFORMATION

■ Door lock buzzer

If an attempt to lock the doors is made when a door is not fully closed, a buzzer sounds continuously for 5 seconds. Fully close the door to stop the buzzer, and lock the vehicle once more.

■ Open door warning buzzer

If the vehicle speed reaches 5 km/h (3 mph), a buzzer sounds to indicate that door(s) or the hood in not fully closed.The open door(s) or hood is displayed on the multi-information display.

■ Passenger and rear seat reminder function

As the first reminder so as not to forget luggage, etc. in the front passenger seat or a rear seat, when the power switch is turned off after any of the following conditions are met, a buzzer will sound and a message will be displayed on the multi-information display for approximately 6 seconds.

Also, as the second reminder, when the doors are locked, a buzzer will sound and the emergency flashers will flash for a few seconds, and a message will be displayed on the multi-information display

- The EV system is started within approximately 15 minutes after opening and closing a rear door or the front passenger's door.
- A rear door or the front passenger's door has been opened and closed after the EV system was started.

The second reminder will not be activated if a rear door or the front passenger door was opened before the doors are locked.

When this function is disabled by following the message displayed on the meters, the passenger and rear seat reminder will be off.

This function will be re-enabled when the EV system is turned on.

However, if a front passenger door and rear door is opened and then closed within approximately 2 seconds, the passenger and rear seat reminder reminder function may not operate.

The passenger and rear seat reminder function determines that luggage, etc. has been placed in the front passenger seat or a rear seat based on opening and closing of the front passenger door or a rear door. Therefore, depending on the situation, the passenger and rear seat reminder function may not operate and you may still forget luggage, etc. in the front passenger seat or a rear seat, or it may operate unnecessarily.

■ Customization

Some functions can be customized. (→P.677)

Opening the doors

▶ Outside the vehicle

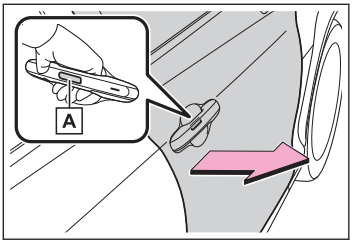

When the doors are locked:

While carrying an electronic key, press the door opener switch A of the door handle and open the door.

Make sure to securely press the door opener switch A on the inner side of the door handle with the electronic key within the detection area.

When the doors are unlocked:

Press the door opener switch A of the door handle to open the door.

Make sure to securely press the door opener switch A on the inner side of the door handle.

▶ Inside the vehicle

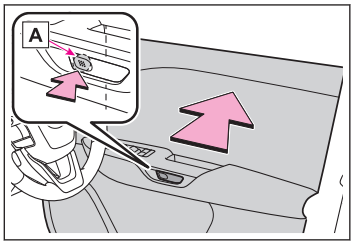

Driver's door:

Even if the door is locked, pressing the front side of the door opener switch A will open the door.

The door will unlock and the door lock indicator will turn off.

Passenger doors:

Press the door lock switch to unlock the door, and then pressing the front side of the door opener switch A to open the door.

The door will unlock and the door lock indicator will turn off.

INFORMATION

■ Inside door opener switch operating conditions

When any of the following conditions are met:

- The vehicle speed is less than 4 km/h (2 mph) and the parking brake is engaged
- The vehicle speed is less than 4 km/h (2 mph) and the brake pedal is depressed
- The shift position is in P

■ When opening a door from inside the vehicle

Open the door pressing the door opener switch.

If the door is not fully unlatched, press the door opener switch twice to open the door.

■ Manual release handles inside the vehicle

The door opener switches inside the vehicle can also be used to manually open the doors.

A door can be opened through electronic operation by pressing the door opener switch, or it can be opened using the door opener switch as a manual release handle and pulling it twice.



■ If a door cannot be opened using the door opener switch

→P.628

Locking/unlocking the doors

INFORMATION

■ Impact detection door lock release system

If the vehicle is involved in a severe frontal or rear collision, manual release handle operation will be enabled for all of the doors.

■ Operation signals

Unlocking is indicated by a buzzer sounding and the emergency flashers flashing. (twice)

Locking is indicated by a buzzer sounding and the emergency flashers flashing. (Once)

■ Security feature

If a door is not opened within approximately 30 seconds after the vehicle is unlocked, the security feature automatically locks the vehicle again.

Using the smart entry & start system

Locking/unlocking the doors using smart entry & start system

The driver should always carry an electronic key (or the card key) on their person, for example in their pocket.

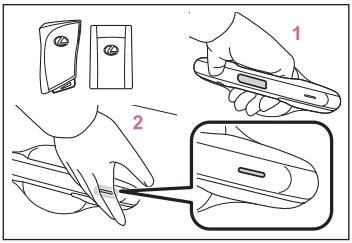

1 Grip the door handle to unlock the doors.*1

Make sure to touch the sensor on the back of the handle.

The doors cannot be unlocked for 3 seconds after the doors are locked.

2 Touch the lock sensor (the indentation on the surface of the door handle) to lock the doors.

Check that the door is securely locked.

Locking the doors will set the alarm system.

*1: The door unlock settings can be changed.

INFORMATION

When the door cannot be locked even though the lock sensor has been touched with a finger



Touch the lock sensor with the palm of your hand.

When gloves are being worn, remove the gloves.

Operations using the wireless remote control

Lock/unlock the doors using wireless remote control

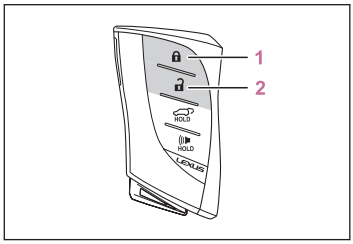

1 Locks all the doors

Check that the door is securely locked.

2 Unlocks all the doors

INFORMATION

Theft deterrent panic mode

When ((is pressed for longer than about 1 second, an alarm will sound intermittently and the vehicle lights will flash to deter any person from trying to break into or damage your vehicle.

To stop the alarm, press any button on the electronic key.



Switching the door unlock function

It is possible to set which doors the entry function unlocks using the wireless remote control.

1. Turn the power switch off.

2. Cancel the intrusion sensor and tilt sensor of the alarm system to prevent unintended triggering of the alarm while changing the settings.

3. When the indicator light on the key surface is not on, press and hold , or for approximately 5 seconds while pressing and holding .

Multi-information display/Beep	Unlocking function
 Exterior: Beeps 3 times	Holding the driver's door handle unlocks only the driver's door.
	Holding any of the passenger door handles unlocks all the doors.
 Exterior: Beeps twice	Holding a door handle unlocks all the doors.

To prevent unintended triggering of the alarm, unlock the doors using the wireless remote control and open and close a door once after the settings have been changed.

(If a door is not opened within 30 seconds after is pressed, the doors will be locked again and the alarm will automatically be set.)In a case that the alarm is triggered, immediately stop the alarm.

Customization

Some functions can be customized. (→P.677)

Using the door lock switches

The vehicle can be locked and unlocked using the entry function, wireless remote control or door lock switches.

Locking/unlocking the doors with the door lock switches

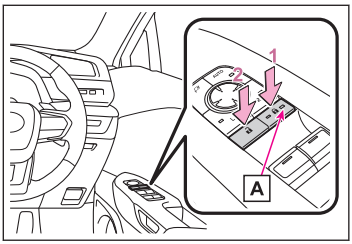

1 Driver's door: Locks all the doors

Doors other than the driver's door: Locks the doors

The indicator A comes on.

2 Driver's door: Unlocks all the doors

Doors other than the driver's door: Unlocks the doors

The indicator A turns off.

Immobilizer system

The vehicle's keys have built-in transponder chips that prevent the EV system from starting if a key has not been previously registered in the vehicle's on-board computer. Never leave the keys inside the vehicle when you leave the vehicle. This system is designed to help prevent vehicle theft but does not guarantee absolute security against all vehicle thefts.

Operating the system

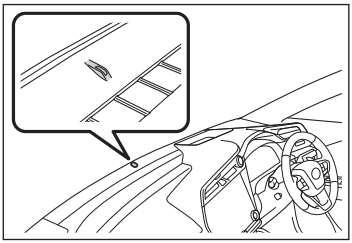

The indicator light flashes after the power switch has been turned off to indicate that the system is operating.

The indicator light stops flashing after the power switch has been turned to ACC or ON to indicate that the system has been canceled.

INFORMATION

System maintenance

The vehicle has a maintenance-free type immobilizer system.

Conditions that may cause the system to malfunction

- If the grip portion of the key is in contact with a metallic object
- If the key is in close proximity to or touching a key registered to the security system (key with a built-in transponder chip) of another vehicle

NOTICE

To ensure the system operates correctly

Do not modify or remove the system. If modified or removed, the proper operation of the system cannot be guaranteed.

Alarm

The alarm uses light and sound to give an alert when an intrusion is detected. The alarm is triggered in the following situations when the alarm is set:

- A locked door or back door is unlocked or opened in any way other than using the entry function or wireless remote control. (The doors will lock again automatically.)
- The hood is opened.
- The intrusion sensor detects something moving inside the vehicle. (Example: an intruder breaks a window and gets into the vehicle.)
- The tilt sensor detects a change of vehicle inclination.

Setting/deactivating/stopping the alarm system

Items to check before locking the vehicle

To prevent unexpected triggering of the alarm and vehicle theft, make sure of the following:

- Nobody is in the vehicle.
- The side windows are closed before the alarm is set.
- No valuables or other personal items are left in the vehicle.

Setting

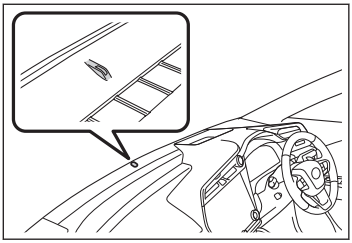

Close the doors, back door and hood, and lock all the doors. The system will be set automatically after 30 seconds.

The indicator light changes from being on to flashing when the system is set.

Deactivating or stopping

Do one of the following to deactivate or stop the alarms:

- Unlock the doors or open the back door using the entry function or wireless remote control.
- Turn the power switch to ACC or ON, or start the EV system. (The alarm will be deactivated or stopped after a few seconds.)

INFORMATION

Setting the alarm

The alarm can be set if all the doors are closed even with the hood open.

System maintenance

The vehicle has a maintenance-free type alarm system.

Triggering of the alarm

The alarm may be triggered in the following situations:(Stopping the alarm deactivates the alarm system.)

- The doors are unlocked using the mechanical key.



- A person inside the vehicle opens a door, the back door or hood, or unlocks the vehicle.



- The 12-volt battery is recharged or replaced when the vehicle is locked. (→P.624)



Alarm-operated door lock

In the following cases, depending on the situation, the door may automatically lock to prevent improper entry into the vehicle:

- When a person remaining in the vehicle unlocks the door and the alarm is activated.
- While the alarm is activated, a person remaining in the vehicle unlocks the door.
- When recharging or replacing the 12-volt battery

NOTICE

To ensure the system operates correctly

Do not modify or remove the system. If modified or removed, the proper operation of the system cannot be guaranteed.

Pre-alarm

If a door is unlocked with the mechanical key while the alarm is being set, the pre-alarm will sound for 10 seconds.

If either the door is locked again or the pre-alarm is stopped within those 10 seconds, an alarm will sound.

Do any of the following in order to deactivate or stop the pre-alarm:

- Close the doors, and lock all doors by smart access system or wireless remote control.
- Turn the power switch to ACC or ON, or start the EV system. (The alarm will be deactivated or stopped after a few seconds.)

Intrusion sensor and tilt sensor

The intrusion sensor and tilt sensor detection

- The intrusion sensor detects intruders or movement in the vehicle.
- The tilt sensor detects changes in vehicle inclination, such as when the vehicle is towed away.

This system is designed to deter and prevent vehicle theft but does not guarantee absolute security against all intrusions.

Setting the intrusion sensor and tilt sensor

The intrusion sensor and tilt sensor will be set automatically when the alarm is set. (→P.106)

Canceling the intrusion sensor and tilt sensor

If you are leaving pets or other moving things inside the vehicle, make sure to disable the intrusion sensor and tilt sensor before setting the alarm, as they will respond to movement inside the vehicle.

1 Touch the shortcut screen switch on the center display. (→P.249)

2 Touch the [Security sensor].

Operation of the intrusion sensor and tilt sensor will be canceled, and a symbol turns into white on the center display.

Touch the switch again to set the intrusion/tilt sensor again.

Turn OFF/ON the intrusion/tilt sensor, the symbol changes to center display.

INFORMATION

Canceling and automatic re-enabling of the intrusion sensor and tilt sensor

- The alarm will still be set even when the intrusion sensor and tilt sensor are canceled.
- After the intrusion sensor and tilt sensor are canceled, pressing the power switch or unlocking the doors using the entry function or wireless remote control will re-enable the intrusion sensor and tilt sensor.
- The intrusion sensor and tilt sensor will automatically be re-enabled when the alarm system is deactivated.

Intrusion sensor detection considerations

The sensor may trigger the alarm in the following situations:

- People or pets are in the vehicle.



- A window is open.

  In this case, the sensor may detect the following:

  - Wind or the movement of objects such as leaves and insects inside the vehicle
  - Ultrasonic waves emitted from devices such as the intrusion sensors of other vehicles
  - The movement of people outside the vehicle



- Small insects such as moths or flies are in the vehicle.

- Unstable items, such as dangling accessories or clothes hanging on the coat hooks, are in the vehicle.



- The vehicle is parked in a place where extreme vibrations or noises occur, such as in a parking garage.



- Ice or snow is removed from the vehicle, causing the vehicle to receive repeated impacts or vibrations.



- The vehicle is inside an automatic or high-pressure car wash.
- The vehicle experiences impacts, such as hail, lightning strikes, and other kinds of repeated impacts or vibrations.

Tilt sensor detection considerations

The sensor may trigger the alarm in the following situations:

- The vehicle is transported by a ferry, trailer, train, etc.
- The vehicle is parked in a parking garage.
- The vehicle is inside a car wash that moves the vehicle.
- Any of the tires loses air pressure.
- The vehicle is jacked up.
- An earthquake occurs or the road caves in.
- Cargo is loaded onto or unloaded from the roof luggage carrier.

⚠ NOTICE

To ensure the intrusion sensor function correctly

- To ensure that the sensors operate properly, do not touch or cover them.



- Do not spray air fresheners or other products directly into the sensor holes.



- Installing accessories other than genuine Lexus parts or leaving objects between the driver's seat and front passenger's seat may reduce the detection performance.

Trailer towing (vehicles with towing package)

Trailer towing

Your vehicle is designed primarily as a passenger carrying vehicle. Towing a trailer will have an adverse effect on handling, performance, braking, durability, and electricity consumption. For your safety and the safety of others, do not overload the vehicle or trailer.

Lexus warranties do not apply to damage or malfunction caused by towing a trailer for commercial purposes.

INFORMATION

Before towing

Check that the following conditions are met:

- The vehicle's tires are properly inflated.
- Trailer tires are inflated according to the trailer manufacturer's recommendation.
- All trailer lights work.
- All lights work each time you connect them.
- The trailer ball is set up at the proper height for the coupler on the trailer.
- The trailer is level when it is hitched.

  Do not drive if the trailer is not level, and check for improper tongue weight, overloading, worn suspension, or other possible causes.
- The trailer cargo is securely loaded.
- The rear view mirrors conform to all applicable federal, state/provincial or local regulations. If they do not, install rear view mirrors appropriate for towing purposes.

Break-in schedule

Lexus recommends that vehicles fitted with new power train components should not be used for towing trailers for the first 800 km (500 miles).

Maintenance

- If you tow a trailer, your vehicle will require more frequent maintenance due to the additional load. (See "Warranty and Service Booklet".)
- Retighten the fixing bolts of the towing ball and bracket after approximately 1000 km (600 miles) of trailer towing.

⚠ WARNING

To avoid accident or injury

- The total trailer weight (trailer weight plus the weight of cargo) must not exceed the following:

  750 kg (1653 lb.)

- The gross combined weight (sum of your vehicle weight plus its load and the total trailer weight) must not exceed the following:

  3390 kg (7473 lb.)

- Do not exceed the trailer hitch assembly weight, gross vehicle weight, gross axle weight and trailer tongue load capacities.
- Never load more weight in the back than in the front of the trailer. About 60% of the load should be in the front half of the trailer, and the remaining 40% in the rear.
- Do not use the following systems when trailer towing.
  - LTA (Lane Tracing Assist)
  - LDA (Lane Departure Alert)
  - Dynamic radar cruise control
  - Cruise control
  - PKSB (Parking Support Brake)
  - BSM (Blind Spot Monitor)
  - Lexus parking assist-sensor
  - RCTA (Rear cross traffic alert)
  - RCD (Rear Camera Detection)

When towing a trailer

- If the total trailer weight exceeds 750 kg (1653 lb.), trailer brakes are required.
- Never tap into your vehicle's hydraulic system, as this will lower the vehicle's braking effectiveness.
- Never tow a trailer without using a safety chain securely attached to both the trailer and the vehicle. If damage occurs to the coupling unit or hitch ball, there is a risk of the trailer wandering into another lane.

When the maximum permissible axle capacity is exceeded

Failing to observe this precaution may lead to an accident causing death or serious injury.

- Add an additional 20.0 kPa (0.2 kgf/cm^2 or bar, 3 psi) to the recommended tire inflation pressure value.

⚠ WARNING

- Do not exceed the established speed limit for towing a trailer in built-up areas or 100 km/h (62 mph), whichever is lower.

⚠ NOTICE

Lexus recommends trailers with brakes that conform to all applicable federal and state/provincial regulations.

Weight

For towing purposes, Lexus recommends using a sway control device when the total trailer weight is greater than the vehicle weight.

Weight limits

Confirm that the total trailer weight, gross vehicle weight, gross axle weight and trailer tongue load are all within the limits.

Gross vehicle weight

The gross vehicle weight must not exceed 2640 kg (5820 lb.).

The gross vehicle weight is the sum weight of the unloaded vehicle, driver, passengers, luggage, hitch and trailer tongue load. Also included is the weight of any special equipment installed on your vehicle.

Gross axle weight

The load on either the front or rear axle resulting from distribution of the gross vehicle weight on both axles must not exceed the following.

Front: 1380 kg (3042 lb.)

Rear: 1470 kg (3240 lb.)

Trailer tongue load

The trailer cargo load should be distributed so that the tongue load is 9 to 11% of the total trailer weight, not exceed the following:

For New Zealand: 75 kg (165 lb.)

(Tongue load/Total trailer weight × 100 = 9 to 11%)

The total trailer weight and tongue load can be measured with platform scales found at a highway weighing stations, building supply companies, trucking companies, junk yards, etc.

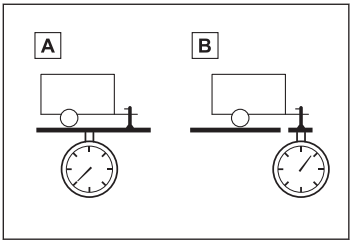

A Total trailer weight
B Tongue load

Towing a trailer

Contact your Lexus dealer for further information about additional requirements such as a towing kits etc.

Hitch

Trailer hitch assemblies have different weight capacities established by the hitch manufacturer. Even though the vehicle may be rated for towing a higher weight, the operator must never exceed the maximum weight rating specified for the trailer hitch.

For vehicles where the towing device blocks any of the lights or license plate, the following shall be observed:

- Do not use towing devices that cannot be easily removed or repositioned.
- Towing devices must be removed or repositioned when not in use.

⚠ WARNING

Observe the following precautions.

- Use only a hitch that conforms to the total trailer weight requirement.
- Follow the directions supplied by the hitch manufacturer.
- Depending on the type of trailer coupler you use, the trailer ball may need to be coated with grease. If so, apply grease to the trailer ball in accordance with the instructions of the manufacturer of the trailer coupler.
- Remove the trailer ball whenever you are not towing a trailer. Remove the trailer hitch if you do not need it. After removing the hitch, seal any mounting holes in the vehicle body to prevent entry of any substances into the vehicle.

⚠ NOTICE

Observe the following precautions.

- Use only the position recommended by your Lexus dealer. Do not install the trailer hitch on the bumper; this may cause body damage.

⚠ NOTICE

- Do not use axle-mounted hitches, as they can cause damage to the axle housing, wheel bearings, wheels or tires.

Connecting trailer lights

Please consult your Lexus dealer when installing trailer lights, as incorrect installation may cause damage to the vehicle's lights. Please take care to comply with your state's laws when installing trailer lights.

⚠ NOTICE

Do not directly splice trailer lights. Directly splicing trailer lights may damage your vehicle's electrical system and cause a malfunction.

Trailer towing tips

Your vehicle will handle differently when towing a trailer. In order to avoid accident, death or serious injury, keep the following in mind when towing:

- Before starting out, check the trailer lights and the vehicle-trailer connections. Recheck after driving a short distance.
- Practice turning, stopping and reversing with the trailer attached in an area away from traffic until you become accustomed to the feel of the vehicle.
- Reversing with a trailer attached is difficult and requires practice. Grip the bottom of the steering wheel and move your hand to the left to move the trailer to the left. Move your hand to the right to move the trailer to right. (This is generally opposite to reversing without a trailer attached.) Avoid sharp or prolonged turning. Have someone guide you when reversing to reduce the risk of an accident.
- As stopping distance is increased when towing a trailer, vehicle-to-vehicle distance should be increased. For each 10 km/h (6 mph) of speed, allow at least one vehicle and trailer length.
- Avoid sudden braking as you may skid, resulting in jackknifing and loss of control. This is especially true on wet or slippery surfaces.
- Avoid jerky starts or sudden acceleration.
- Avoid jerky steering and sharp turns, and slow down before making turns.

- Note that when making a turn, the trailer wheels will be closer than the vehicle wheels to the inside of the turn. Compensate by making a larger than normal turning radius.
- Crosswinds and rough roads will adversely affect handling of your vehicle and trailer, causing sway. Periodically check the rear to prepare for being passed by large trucks or buses, which may cause your vehicle and trailer to sway. If swaying occurs, firmly grip the steering wheel, reduce speed immediately but gradually, and steer straight ahead. Never increase speed. If you make no extreme correction with the steering or brakes, your vehicle and trailer will stabilize.
- Take care when passing other vehicles. Passing requires considerable distance. After passing a vehicle, do not forget the length of your trailer, and be sure you have plenty of room before changing lanes.
- Due to the added load of the trailer, your vehicle's EV system may overheat on hot days (at temperatures over 30°C [85°F]) when driving up a long or steep grade. If the high coolant temperature warning light comes on, it indicates that the EV system is overheating. Immediately turn off the air conditioning (if in use), pull your vehicle off the road and stop in a safe spot.

⚠ WARNING

Observe the following precautions.

- Observe the legal maximum speeds for trailer towing.
- Slow down and downshift before descending steep or long downhill grades. Do not make sudden downshifts while descending steep or long downhill grades.
- Avoid holding the brake pedal down too long or applying the brakes too frequently. This could cause the brakes to overheat and result in reduced braking efficiency.

Parking on a slope when towing a trailer

1. Apply the brakes and keep them applied.
2. Have someone place wheel blocks under both the vehicle and trailer wheels.
3. When the wheel blocks are in place, release the brakes slowly until the blocks absorb the load.
4. Apply the parking brake.
5. Shift into P and turn off the EV system.

Starting off on a slope when towing a trailer

1 With the transmission in the P, start the EV system.

2 Be sure to keep the brake pedal depressed.

3 Shift into a forward gear.

If reversing, shift into R.

4 If the parking brake is in manual mode, release the parking brake.

5 Release the brake pedal, and slowly pull or back away from the wheel blocks. Stop and apply the brakes.

6 Have someone retrieve the blocks.

Trailer towing (vehicles without towing package)

Lexus does not recommend towing a trailer with your vehicle. Lexus also does not recommend the installation of a tow hitch or the use of a tow hitch carrier for a wheelchair, scooter, bicycle, etc. Your vehicle is not designed for trailer towing or for the use of tow hitch mounted carriers.

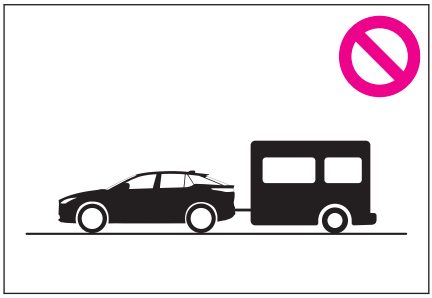

Opening and closing the windows

⚠ WARNING

Observe the following precautions. The driver is responsible for all power window operations, including the operation for the passengers.

- Do not let a child operate the power windows. Operation by a child may cause a child or other passengers to have a body part caught in a power window. Also, when riding with a child, it is recommended to turn the window lock switch on.
- Check to make sure that all passengers do not have any part of their body in a position where it could be caught when a window is being operated.
- When exiting the vehicle, turn the power switch off, carry the key and exit the vehicle along with the child. There may be accidental operation, due to mischief, etc., that may possibly lead to an accident.

INFORMATION

■ Operating conditions of the power windows

The power switch is in ON.

■ Operating the power windows after turning the EV system off

The power windows can be operated for approximately 45 seconds after the power switch is turned to ACC or OFF.

They cannot, however, be operated once either front door is opened.

■ Using the voice control system*

The following operations can be performed using the voice control system:

- Opening/closing of all of the windows simultaneously
- Opening/closing of each window individually

(Operation is possible only when the window lock switch is off.)

For details, refer to the "Multimedia Owner's Manual".

■ Customization

Some functions can be customized. (→P.682)

Functions which aid in safe opening and closing of the windows

The following functions aid in safe opening and closing of the windows.

- Jam protection function

*: If equipped

If an object becomes jammed between the window and the window frame while the window is closing, window movement is stopped and the window is opened slightly.

- Catch protection function

If an object becomes caught between the door and window while the window is opening, window movement is stopped.

- Power windows open warning buzzer

A buzzer sounds and a message is shown on the multi-information display in the instrument cluster when the power switch is turned off and the driver's door is opened with the power windows open.

⚠ WARNING

■ Jam protection function

- Never use any part of your body to intentionally activate the jam protection function.
- The jam protection function may not work if something gets jammed just before the window is fully closed.

  Be careful not to get any part of your body jammed in the window.

■ Catch protection function

- Never use any part of your body or clothing to intentionally activate the catch protection function.
- Be careful not to get any part of your body or clothing caught in the window. The catch protection function may not work if something gets caught just before the window is fully opened.

Operations using the power window switches

Opening/closing the windows using the power window switch

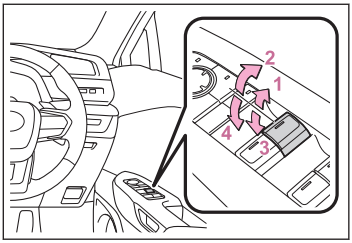

1 Lift the power window switch partway.

The window will close while the switch is lifted.

2 Fully lift the power window switch.

The window will fully close automatically.

To stop the window partway, operate the switch in the opposite direction.

3 Push the power window switch partway.

The window will open while the switch is pushed.

4 Fully push the power window switch.

The window will fully open automatically.

To stop the window partway, operate the switch in the opposite direction.

Operations using the wireless remote control

The power windows can be opened and closed using the wireless remote control.*1

⚠ WARNING

When using the wireless remote control to operate the power windows, operate the power windows after making sure that there is no possibility of any passenger having any of their body parts caught in a power window. Also do not let a child operate the windows using the wireless remote control. Children and other passengers may get caught in the power window.

Open the windows using the wireless remote control

Using the wireless remote control, the doors can be unlocked and all of the windows opened at the same time.*2

Push and hold the unlock switch on the wireless remote control.

The doors will unlock and the windows will open.

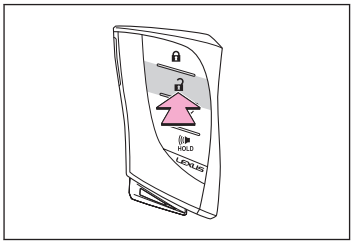

Close the windows using the wireless remote control

Using the wireless remote control, the doors can be locked and all of the windows closed at the same time.*2

Press and hold the lock switch on the wireless remote control.

All of the doors will lock and the windows will close.

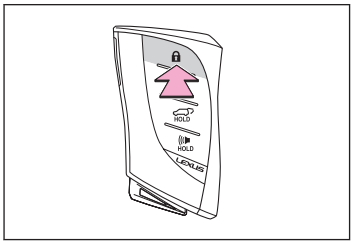

*1: These settings must be customized at your Lexus dealer.

*2: This setting must be customized at your Lexus dealer.

Prevent accidental operation of the windows

The window lock switch is designed to prevent children from accidentally opening or closing a window.

Press the window lock switch.

The indicator A will come on and the passenger windows will be locked.

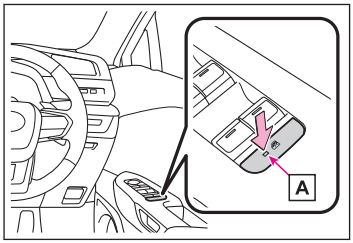

Loading the vehicle with luggage

Precautions for loading luggage into the luggage compartment

⚠ WARNING

■ Things that must not be carried in the luggage compartment

The following things may cause a fire if loaded in the luggage compartment:

- Receptacles containing gasoline
- Aerosol cans

■ Storage precautions

Observe the following precautions.Failure to do so may prevent the pedals from being depressed properly, may block the driver's vision, or may result in items hitting the driver or passengers, possibly causing an accident.

- Stow cargo and luggage in the luggage compartment whenever possible.
- Do not stack cargo and luggage in the luggage compartment higher than the seat-backs.
- When you fold down the rear seats, long items should not be placed directly behind the front seats.
- Never allow anyone to ride in the luggage compartment. It is not designed for passengers. They should ride in their seats with their seat belts properly fastened.
- Do not place cargo or luggage in or on the following locations.
  - At the feet of the driver
  - On the front passenger or rear seats (when stacking items)
  - On the luggage cover
  - On the instrument panel
  - On the dashboard
- Secure all items in the occupant compartment.

■ Precautions for luggage weight and distribution

- Do not overload your vehicle.
- Load the vehicle as evenly as possible.

  If the vehicle is loaded unevenly, the load on each tire will differ. This will lead to a decrease in handling ability and brake performance, possibly leading to an accident.

■ When using a roof luggage carrier (vehicles with roof rails)

Observe the following precautions:

⚠ WARNING

- Place the cargo so that its weight is distributed evenly between the front and rear axles.
- If loading long or wide cargo, never exceed the vehicle overall length or width.
- Before driving, make sure the cargo is securely fastened on the roof luggage carrier.
- Loading cargo on the roof luggage carrier will make the center of gravity of the vehicle higher.

  Avoid high speeds, sudden starts, sharp turns, sudden braking, or abrupt maneuvers. The vehicle may not be able to be controlled correctly and may rollover.
- If driving for a long distance, on rough roads, or at high speeds, stop the vehicle now and then during the trip to make sure the cargo remains in its place.
- Do not exceed 75 kg (165.3 lb.) cargo weight on the roof luggage carrier.

Back door functions and operation

The back door can be locked/unlocked and opened/closed by the following procedures.

⚠ WARNING

■ Before driving the vehicle

Observe the following precautions.

Before driving the vehicle, make sure that the power back door is fully closed. If the power back door is not fully closed, it may open unexpectedly while driving, causing an accident.

■ Caution while driving

- Keep the power back door closed while driving.

  If the power back door is left open, it may hit nearby objects while driving or luggage may be unexpectedly thrown out, causing an accident.
- Never let anyone sit in the luggage compartment.

  In the event of sudden braking, sudden swerving or a collision, they are susceptible to death or serious injury.

■ When children are in the vehicle

Observe the following precautions.

- Do not allow children to play in the luggage compartment.

  If a child is accidentally locked in the luggage compartment, they could have heat exhaustion or other injuries.

⚠ WARNING

- Do not allow a child to open or close the power back door.

  Doing so may cause the power back door to move unexpectedly, or cause the child's hands, arms, head, or neck to be caught by the closing power back door.

Operating the back door

Observe the following precautions.

- Remove any heavy loads, such as snow and ice, from the back door before opening it. Failure to do so may cause the back door to suddenly shut again after it is opened.
- When opening or closing the back door, thoroughly check to make sure the surrounding area is safe.
- If anyone is in the vicinity, make sure they are safe and let them know that the back door is about to open or close.
- Use caution when opening or closing the back door in windy weather as it may move abruptly in strong wind.
- The back door may suddenly shut if it is not opened fully while on a steep incline. Make sure that the back door is secured before using the luggage compartment.
- When closing the back door, take extra care to prevent your fingers, etc., from being caught.
- When closing the back door, make sure to press it lightly on its outer surface. If the back door handle is used to fully close the back door, it may result in hands or arms being caught.
- Do not pull on the back door spindle (→P.128) to close the power back door, and do not hang on the back door spindle.

  Doing so may cause hands to be caught or the back door spindle to break, causing an accident.
- If a bicycle carrier or similar heavy object is attached to the power back door, it may suddenly shut again after being opened, causing someone's hands, arms, head or neck to be caught and injured. When installing an accessory part to the power back door, using a genuine Lexus part is recommended.

Back door closer

- In the event that the back door is left slightly open, the back door closer will automatically close it to the fully closed position. It takes several seconds before the back door closer begins to operate. Be careful not to get fingers caught or anything else in the back door, as this may cause bone fractures or other serious injuries.
- Use caution when using the back door closer as it still operates when the power back door system is disabled.

⚠ WARNING

Power back door

Observe the following precautions.

- Check the safety of the surrounding area to make sure there are no obstacles or anything that could cause any of your belongings to get caught.
- If anyone is in the vicinity, make sure they are safe and let them know that the power back door is about to open or close.
- If the power back door system is disabled while the power back door is operating, the power back door will stop operating. The power back door must then be operated manually. Take extra care in this situation, as the power back door may open or close suddenly.
- If the operating conditions of the power back door are no longer met, a buzzer may sound and the power back door may stop opening or closing. The power back door must then be operated manually. Take extra care on an incline in this situation, as the power back door may move suddenly.
- On an incline, the power back door may suddenly shut after it opens. Make sure the power back door is fully open and secure.
- In the following situations, the power back door may detect an abnormality and automatic operation may be stopped. In this case, the power back door must then be operated manually. Take extra care in this situation, as the stopped power back door may suddenly open or close, causing an accident.
  - When the power back door contacts an obstacle
  - When the 12-volt battery voltage suddenly drops, such as when the power switch is turned to ON or the EV system is started during automatic operation
- If a bicycle carrier or similar heavy object is attached to the power back door, the power back door may not operate, causing a malfunction, or the power back door may suddenly shut again after being opened, causing someone's hands, arms, head or neck to be caught and injured. When installing an accessory part to the power back door, using a genuine Lexus part is recommended.

Jam protection function

Observe the following precautions.

- Never use any part of your body to intentionally activate the jam protection function.
- The jam protection function may not work if something gets caught just before the power back door fully closes. Be careful not to get fingers caught or anything else.
- The jam protection function may not work depending on the shape of the object that is caught. Be careful not to catch fingers or anything else.

⚠ WARNING

■ Close & lock (Walk-Away) function and Hands Free close & lock (Walk-Away) function*1

The back door starts to close automatically when leaving the back door. Check the safety of the surrounding area to make sure there are no obstacles or anything that could cause any of your belongings to get caught.

⚠ NOTICE

■ Precautions for the back door spindles



The back door is equipped with spindles A that hold the back door in place.

Observe the following precautions. Failure to do so may cause damage to the back door spindle A, resulting in malfunction.

- Do not attach any foreign objects, such as stickers, plastic sheets, or adhesives to the spindle rod.
- Do not touch the spindle rod with gloves or other fabric items.
- Do not attach heavy accessories to the back door.

  When attaching, ask your Lexus dealer for details.
- Do not place your hand on the spindle or apply lateral forces to it.

■ To prevent malfunction of the power back door and back door closer

Observe the following precautions. Failure to do so may lead to malfunction of the power back door or back door closer.

- Do not apply excessive force to the back door while the back door closer is operating.
- Make sure that there is no ice between the back door and frame that would prevent movement of the back door.
- Take care not to damage the sensors (installed on the right and left edges of the power back door) with a knife or other sharp object.

  If the sensor is disconnected, the power back door will not close automatically.

*: If equipped

*1: This setting can be customized by your Lexus dealer.

NOTICE

Close & lock function*1

When closing the power back door using the close & lock function, a different buzzer than the normal one will sound before the operation begins.

To check that the operation has started correctly, check that a different buzzer than the normal one has sounded.

Additionally, when the power back door is fully closed and locked, operation signals will indicate that all of the doors have been locked.

Before leaving the vehicle, make sure that the operational signals have operated and that all of the doors are locked.

INFORMATION

Luggage compartment light

- The luggage compartment light turns on when the back door is opened.
- If the luggage compartment light is left on when the power switch is turned off, the light will go off automatically after 20 minutes.

Power back door operating conditions

With the power back door operations set to ON, it can automatically open and close for the following conditions:

- When the back door is unlocked.

  However, if the back door is locked, the power back door can be operated in the following situations:

  - When the electronic key is being carried and the power back door switch is pushed
  - When set up by customizable functions to be able to operate, even when locked, when using the wireless remote control

- When the power switch is in ON, the back door will operate if any of the following conditions are met, in addition to the above conditions:

  - Parking brake is engaged
  - The brake pedal is depressed
  - The shift position is in P

Back door closer

In the event that the back door is left slightly open, the back door closer will automatically close it to the fully closed position.

*: If equipped

*1: This setting can be customized by your Lexus dealer.

Whatever the state of the power switch, the back door closer operates.

Operation of the power back door

- A buzzer sounds and the emergency flashers flash twice to indicate that the back door is opening/closing.
- When the power back door operations are OFF, the power back door does not operate but it can be opened and closed by hand.
- When the power back door automatically opens, if an abnormality due to people or objects is detected, operation will stop.

Close & lock (Walk-Away) function operating conditions

This function can be operated when all of the following conditions are met:

- Close & lock (Walk-Away) function is enabled.
- An electronic key is not detected within the vehicle.
- All of the doors other than the power back door are closed.
- The brake pedal is not depressed.
- The power switch is off.
- The electronic key is within the effective range (detection areas).

Situations in which the close & lock (Walk-Away) function may not operate properly

In the following situations, the function may not operate properly:

- When the smart entry & start system does not operate properly.
- When the close & lock function does not operate properly.
- When moving away from the back door while the close & lock (Walk-Away) function is in the standby state.

Close & lock function*1 operating conditions

This function can be operated when all of the following conditions are met:

- An electronic key is not detected within the vehicle.
- All of the doors other than the power back door are closed.
- The power switch is off.

Situations in which the close & lock function*1 may not operate properly

In the following situations, the close & lock function may not operate properly:

- If the switch on the lower part of the power back door (→P.124) is pressed by a hand which is holding an electronic key.

*1: This setting can be customized by your Lexus dealer.

- If the switch on the lower part of the power back door (→P.133) is pressed when the electronic key is in a bag, etc. that is placed on the ground
- If the switch on the lower part of the power back door (→P.133) is pressed with the electronic key not near the vehicle.

When reconnecting the 12-volt battery

To enable the power back door to operate properly, close the back door manually.

Jam protection function



Sensors are installed in the right and left sides of the power back door.

When the door is automatically closing and the sensors are pushed due to an object being clamped, the jam protection function operates. From that position the door automatically moves a little in the opposite direction and then the function stops.

Customization

Some functions can be customized. (→P.679)

Operating the back door using the smart entry & start system

The back door can be locked/unlocked while carrying an electronic key or the card key. The driver should always carry the electronic key or the card key.

Locking/unlocking the back door using smart entry & start system

Perform the following while carrying an electronic key.

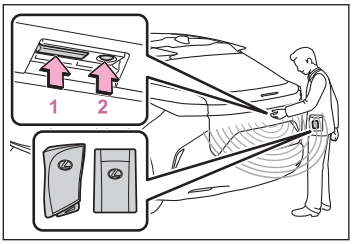

1 Press 1.

All of the doors will unlock. However, the doors cannot be unlocked within 3 seconds after they were locked.

2 Press 2.

All of the doors will lock. Make sure that the doors are securely locked.

Locking/unlocking the back door using the door lock switches

Locking/unlocking the back door using the door lock switches

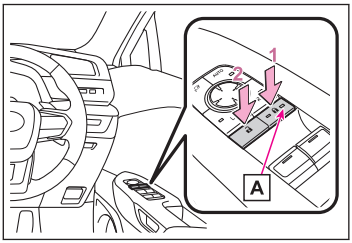

1 Press the switch.

All of the doors, including the back door, will lock.

The indicator A comes on.

2 Press the switch.

All of the doors, including the back door, will unlock.

The indicator A turns off.

Back door operations using the wireless remote control

Opening/closing the back door using the wireless remote control

Press for 1 second.

The back door will open.

The power back door can be operated when it is unlocked*1.

Pressing the switch while the power back door is opening/closing will stop the operation.

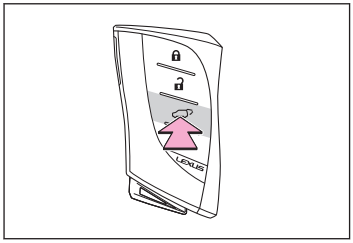

Pressing and holding the switch again for approximately 1 second will operate the power back door in the opposite direction.

Lock/unlock the back door using wireless remote control

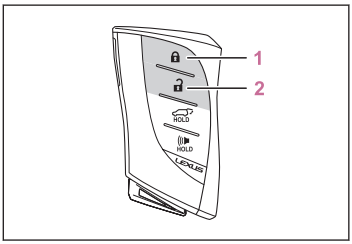

1 Press .

All of the doors, including the back door, will lock.

Make sure that the doors are securely locked.

2 Press .

*1: Opening of the power back door when it is locked can be enabled by a customized setting.

Back door operations using the back door operation switch inside the vehicle

Opening/closing the back door from the inside

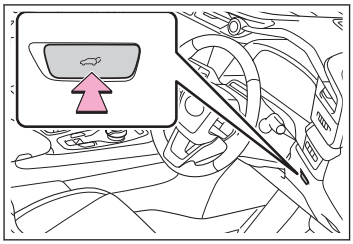

Press the for 1 second.

A buzzer sounds and the back door automatically opens and closes.

Pressing the while the back door is opening/closing stops the operation.

When the is pressed again during the halted operation, the back door will perform the reverse operation.

Back door operations using the back door operation switch outside the vehicle

Open the back door automatically using the back door opener switch

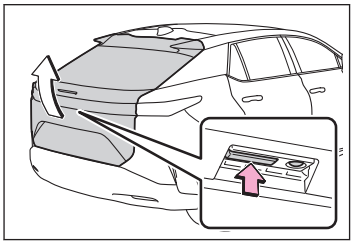

When the power back door is unlocked: Press the back door opener switch.

When the power back door is locked: While carrying an electronic key, press and hold the back door opener switch.

A buzzer will sound and the power back door will automatically open.

Pressing the switch while the power back door is opening/closing will stop the operation.

Closing the back door using the

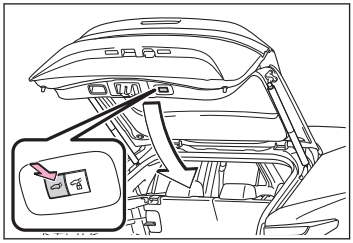

Press the .

A buzzer sounds and the back door automatically closes.

Pressing the while the back door is closing stops the operation.

Pressing the again will reverse the operation.

Close all of the doors except the back door, carrying an electronic key and press the switch on the lower part of the back door

1 **Close all of the doors except the back door, carrying an electronic key and press the switch on the lower part of the back door.**

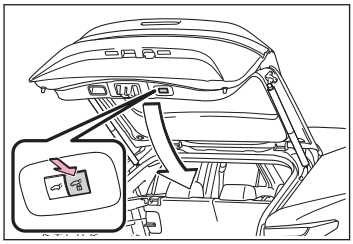

A different buzzer than the normal one will sound and the close & lock (Walk-Away) function will go into standby.

2 **While the buzzer is sounding, move away from the back door.**

When the sensor detects that you are away from the back door, the emergency flashers will flash, and the buzzer will sound. Depending on the direction of moving away from the back door, the location and how to hold the electronic key or circumstances, it may not be detected properly.

All the doors other than the back door will be locked, and after the back door is closed, the back door will also be locked. When all the doors have been closed and locked, the buzzer will sound and the emergency flashers will flash.

The standby state is canceled if you do not move away from the back door for 30 seconds. To operate the function again, perform the procedure again from the beginning.

If you approach the back door carrying the electronic key, the back door operation will stop, all the doors will be unlocked, and the buzzer will sound and the emergency flashers will flash.

If the switch is pressed after the back door operation has stopped, the close & lock (Walk-Away) function will go into standby again.

Close the back door and lock all doors (close & lock function)*1

Press the switch.

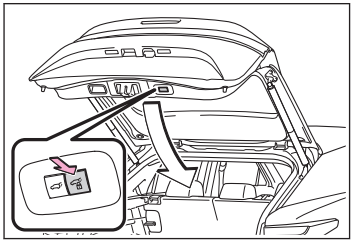

The power back door will close and all of the doors will be locked at the same time.

A different buzzer than the normal one will sound and the power back door will begin closing automatically. When the power back door is closed, all of the doors will lock simultaneously and operation signals will indicate that all of the doors have been locked.

*1: This setting can be customized by your Lexus dealer.

If the switch is pressed while the power back door is closing, the operation will stop.

Pressing the switch again will open the power back door automatically.

Back door operations using the back door handle

Closing the back door automatically using the back door handle

Pull the back door downward using the back door handle.

A buzzer sounds and the back door automatically closes.

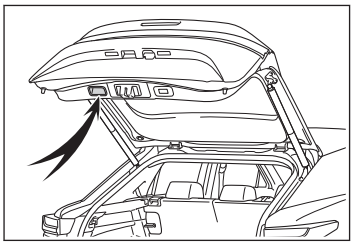

Back door operations using the kick sensor (vehicles with Hands Free Power Back Door)

⚠ NOTICE

The kick sensor is located behind lower center part of the rear bumper.

Observe the following to ensure that the power back door operates properly:

- Keep the lower center part of the rear bumper clean at all times.

  If the lower center part of the rear bumper is dirty or covered with snow, the kick sensor may not operate.

  In this situation, clean off the dirt or snow, move the vehicle from the current position and then check if the kick sensor operates.

  If it does not operate, have the vehicle inspected by your Lexus dealer.

- Do not apply coatings that have a rain clearing (hydrophilic) effect, or other coatings, to the lower center part of the rear bumper.

- Do not park the vehicle near objects that may move and contact the lower center part of the rear bumper, such as grass or trees.

  If the vehicle has been parked for a while near objects that may move and contact the lower center part of the rear bumper, such as grass or trees, the kick sensor may not operate.

  In this situation, move the vehicle from the current position and then check if the kick sensor operates.

  If it does not operate, have the vehicle inspected by your Lexus dealer.

- Do not subject the kick sensor or its surrounding area to a strong impact.

NOTICE

If the kick sensor or its surrounding area has been subjected to a strong impact, the kick sensor may not operate properly.

If the kick sensor does not operate in the following situations, have the vehicle inspected by your Lexus dealer.

- The kick sensor or its surrounding area has been subjected to a strong impact.
- The lower center part of the rear bumper is scratched or damaged.

- Do not disassemble the rear bumper.
- Do not attach stickers to the rear bumper.
- Do not paint the rear bumper.
- If a bicycle carrier or similar heavy object is attached to the power back door, disable the Hands Free Power Back Door (kick sensor).

INFORMATION

Hands Free Power Back Door operating conditions*

- The Hands Free Power Back Door (kick sensor) setting is on.
- When an electronic key is carried within the operation range.

Situations in which the Hands Free Power Back Door may not operate properly*

In the following situations, the Hands Free Power Back Door may not operate properly:

- When a foot remains under the rear bumper
- If the rear bumper is strongly hit with a foot or is touched for a while

  If the rear bumper has been touched for a while, wait for a short time before attempting to operate the back door again.
- When operated while a person is too close to the rear bumper
- When an external radio wave source interferes with the communication between the vehicle and electronic key
- When the vehicle is parked near metal, or an external radio wave or electrical noise source which affects the sensitivity of the Hands Free Power Back Door, such as a pay parking spot, gas station, electrically heated road, fluorescent light, or metal plate
- When the vehicle is near a TV tower, electric power plant, radio station, large display, airport or other facility that generates strong radio waves or electrical noise
- When a large amount of water is applied to the rear bumper, such as when the vehicle is being washed or in heavy rain

*: If equipped

- When mud, snow or ice is attached to the rear bumper
- When the vehicle has been parked for a while near objects that may move and contact the rear bumper, such as plants
- When an accessory is installed to the rear bumper

  If an accessory has been installed, turn the Hands Free Power Back Door (kick sensor) operation setting off.

Preventing unintentional operation of the Hands Free Power Back Door*

When an electronic key is in the operation detection area, the Hands Free Power Back Door may operate unintentionally, so be careful in the following situations:

- When a large amount of water is applied to the rear bumper, such as when the vehicle is being washed or in heavy rain
- When dirt is wiped off the rear bumper
- When a small animal or small object, such as a ball, moves under the rear bumper
- When an object is moved from under the rear bumper
- If someone is swinging their legs while sitting on the rear bumper
- If the legs or another part of someone's body contacts the rear bumper while passing by the vehicle
- When the vehicle is parked near an electrical noise source which affects the sensitivity of the Hands Free Power Back Door, such as a pay parking spot, gas station, electrically heated road, or fluorescent light
- When the vehicle is near a TV tower, electric power plant, radio station, large display, airport or other facility that generates strong radio waves or electrical noise
- When the vehicle is parked in a place where objects such as plants are near the rear bumper
- If luggage is set near the rear bumper
- If accessories or a vehicle cover is installed/removed near the rear bumper
- When the vehicle is being towed

To prevent unintentional operation, turn the Hands Free Power Back Door (kick sensor) operation setting off.

*: If equipped

Open/close the back door using the kick sensor (vehicles with Hands Free Power Back Door)

⚠ WARNING

Observe the following precautions when operating the power back door.

- Check the safety of the surrounding area to make sure there are no obstacles or anything that could cause any of your belongings to get caught.
- Do not operate the Hands Free Power Back Door if there is little space under the rear bumper.

1 **While carrying an electronic key, stand within the smart entry & start system operation range, approximately 50 to 70 cm (19.7 to 27.6 in.) from the rear bumper.**

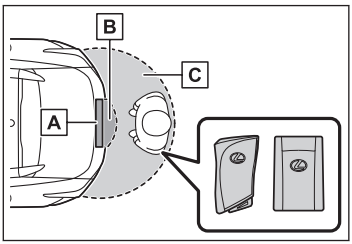

A Kick sensor

B Hands Free Power Back Door operation detection area

C Smart entry & start system operation detection area (→P.95)

2 **Perform a kick operation by moving your foot to within approximately 10 cm (3.9 in.) of the rear bumper, and then pulling your foot back after the buzzer sounds.**

- Perform the entire kick operation within 1 second.
- The Hands Free Power Back Door will not start operating while a foot is detected under the rear bumper.
- Operate the Hands Free Power Back Door without contacting the rear bumper with your foot.
- If another electronic key is in the cabin or luggage compartment, it may take slightly longer than normal for the operation to occur.
- If the buzzer sounds twice, perform a kick operation again.

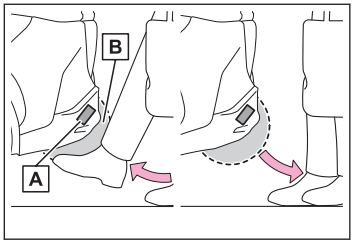

A Kick sensor

B Hands Free Power Back Door operation detection area

3 **When the kick sensor detects that your foot is pulled back, a buzzer will sound and the power back door will automatically fully open/close.**

If kick operation is performed again in the middle of back door operating, the operation will stop.

INFORMATION

When all of the doors are locked, if a kick operation is detected by the kick sensor, all of the doors will unlock.

Back door operations using the kick sensor (vehicles with Hands Free close & lock [Walk-Away] function)*1

NOTICE

The kick sensor is located behind lower center part of the rear bumper.

Observe the following to ensure that the power back door operates properly:

- Keep the lower center part of the rear bumper clean at all times.

  If the lower center part of the rear bumper is dirty or covered with snow, the kick sensor may not operate.

  In this situation, clean off the dirt or snow, move the vehicle from the current position and then check if the kick sensor operates.

  If it does not operate, have the vehicle inspected by your Lexus dealer.
- Do not apply coatings that have a rain clearing (hydrophilic) effect, or other coatings, to the lower center part of the rear bumper.
- Do not park the vehicle near objects that may move and contact the lower center part of the rear bumper, such as grass or trees.

  If the vehicle has been parked for a while near objects that may move and contact the lower center part of the rear bumper, such as grass or trees, the kick sensor may not operate.

*: If equipped

*1: This setting can be customized by your Lexus dealer.

NOTICE

In this situation, move the vehicle from the current position and then check if the kick sensor operates.

If it does not operate, have the vehicle inspected by your Lexus dealer.

- Do not subject the kick sensor or its surrounding area to a strong impact.

  If the kick sensor or its surrounding area has been subjected to a strong impact, the kick sensor may not operate properly.

  If the kick sensor does not operate in the following situations, have the vehicle inspected by your Lexus dealer.

  - The kick sensor or its surrounding area has been subjected to a strong impact.
  - The lower center part of the rear bumper is scratched or damaged.
- Do not disassemble the rear bumper.
- Do not attach stickers to the rear bumper.
- Do not paint the rear bumper.
- If a bicycle carrier or similar heavy object is attached to the power back door, disable the Hands Free Power Back Door (kick sensor).

INFORMATION

Hands Free close & lock (Walk-Away) function* operating conditions

This function can be operated when all of the following conditions are met:

- Hands Free close & lock (Walk-Away) function is enabled*1.
- Hands Free Power Back Door* is enabled.
- An electronic key is not detected within the vehicle.
- All of the doors other than the back door are closed.
- The power switch is off.
- The electronic key is within the effective range (detection areas).

Situations in which the Hands Free close & lock (Walk-Away) function*1 may not operate properly

In the following situations, the function may not operate properly:

- When the smart entry & start system does not operate properly.
- When the close & lock function does not operate properly.

*: If equipped

*1: This setting can be customized by your Lexus dealer.

- When moving away from the back door while the Hands Free close & lock (Walk-Away) function is in the standby state.
- When the Hands Free Power Back Door does not operate properly.*

Closing and locking the back door after moving away from the back door using the kick sensor (Hands Free close & lock [Walk-Away] function)**1

1 **While carrying an electronic key, stand within the smart entry & start system operation range, approximately 50 to 70 cm (19.7 to 27.6 in.) from the rear bumper.**

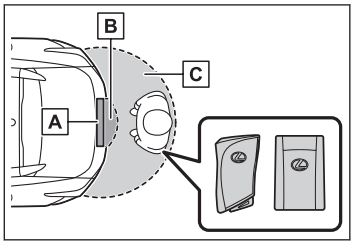

A Kick sensor
B Hands Free Power Back Door operation detection area
C Smart entry & start system operation detection area (→P.95)

2 **Perform a kick operation by moving your foot to within approximately 10 cm (3.9 in.) of the rear bumper, and then pulling your foot back after the buzzer sounds.**

- Perform the entire kick operation within 1 second.
- The Hands Free Power Back Door will not start operating while a foot is detected under the rear bumper.
- Operate the Hands Free Power Back Door without contacting the rear bumper with your foot.
- If another electronic key is in the cabin or luggage compartment, it may take slightly longer than normal for the operation to occur.
- If the buzzer sounds twice, perform a kick operation again.

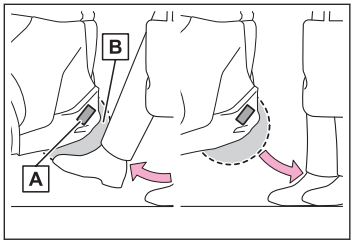

A Kick sensor
B Hands Free Power Back Door operation detection area

*: If equipped

*1: This setting can be customized by your Lexus dealer.

3 **When the kick sensor detects that your foot is pulled back, a different buzzer than the normal one will sound and the Hands Free close & lock (Walk-Away) function will go into standby.**

4 **While the buzzer is sounding, move away from the back door.**

When the sensor detects that you are away from the back door, the emergency flashers will flash, and the buzzer will sound. Depending on the direction of moving away from the back door, the location and how to hold the electronic key or circumstances, it may not be detected properly.

All the doors other than the back door will be locked, and after the back door is closed, the back door will also be locked. When all the doors have been closed and locked, the buzzer will sound and the emergency flashers will flash.

The standby state is canceled if you do not move away from the back door for 30 seconds. To operate the function again, perform the procedure again from the beginning.

If you approach the back door carrying the electronic key, the back door operation will stop, all the doors will be unlocked, and the buzzer will sound and the emergency flashers will flash.

If the power back door is operated after the back door operation has stopped, the Hands Free close & lock (Walk-Away) function will go into standby again.

Back door reserve lock function

This function reserves the locking of the power back door when the power back door is open.

Reserves the locking of the all the doors

If the following operations are performed, all of the doors except the power back door will lock and then the power back door will lock when it is completely closed.

1 **Close all of the doors, except the power back door.**

2 **Perform an automatic closing operation of the power back door and lock the doors using the wireless remote control (→P.132) or smart entry & start system (→P.131) while the power back door is closing.**

Operation signals will indicate that all the doors have been closed and locked.

- If the electronic key is placed inside the vehicle after starting a close operation via the door reserve lock function, the electronic key may become locked inside the vehicle.
- If the back door does not fully close due to the operation of the jam protection function, etc., while the back door is automatically closing after a reserve lock operation is performed, the reserve lock function is canceled and all the doors will unlock.

● Before leaving the vehicle, make sure that all the doors are closed and locked.

Adjusting the open position of the back door

The open position of the power back door can be adjusted.

1 **Stop the back door in the desirable position.**

2 **Press and hold the switch on the lower part of the back door for approximately 2 seconds.**

When the settings are completed, the buzzer sounds 4 times.

When opening the back door the next time, the back door will stop at that position.

Canceling the adjusted open position of the back door

Press and hold the switch on the lower part of the back door for approximately 7 seconds.

After the buzzer sounds 4 times, it sounds twice more.

When the power back door does the opening operation the next time, the door will open to the initial settings position.

Rear seat seatbacks

Folding the seat backs can be done with the lever operations.

⚠ WARNING

■ When operating the rear seatback

Observe the following precautions.

● Do not operate the rear seat if it is occupied.

● After adjusting the seat, make sure that the seat is locked in position. If the seatback is not securely locked, the red marking will be visible. Make sure that the red marking is not visible.



■ When a rear seatback is folded

Observe the following precautions.

● Do not fold down the rear seatbacks while driving.

⚠ WARNING

- Stop the vehicle on level ground, apply the parking brake and change the shift position to P.
- Do not allow anyone to sit on a folded rear seatback or in the luggage compartment while driving.
- Do not allow children to enter the luggage compartment.

After adjusting the rear seats

Observe the following precautions.

- Make sure that the rear seatback is securely locked in position by lightly pushing it back and forth.

  If the seatback is not securely locked, the red marking will be visible. Make sure that the red marking is not visible.



- Check that the seat belts are not twisted or caught between or behind in the rear seatback.

⚠ NOTICE

The seat belt for the rear center seat, seat belt buckles and armrest must be stowed before you fold down the rear seatbacks.

Fold the rear seatbacks

1 Stow the rear center seat belt, seat belt buckles and armrest.

2 Lower the head restraint of the rear seat.

3 Pull the seatback angle adjustment lever and fold down the seatback.

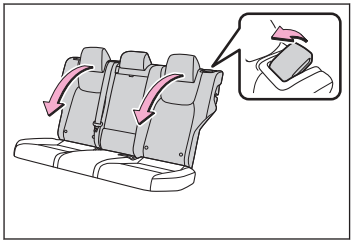

Return the rear seatbacks

1 Raise the rear seatback until it locks.

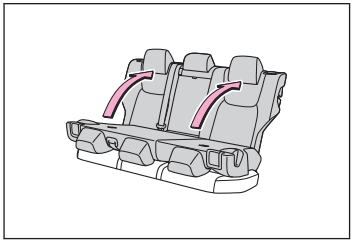

2 Check that the plate for each seat belt is on the front side of the seat.

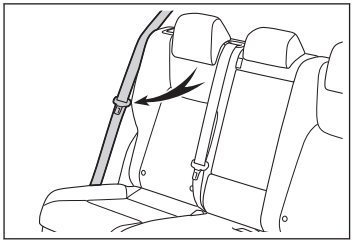

Adjusting the seats

Adjusting the front seats

Adjust the seat forward/backward and up/down as necessary to obtain a correct posture.

- Adjust the angle of the seatback so that you are sitting straight up and so that you do not have to lean forward to steer.
- Adjust the seat so that you can depress the pedals fully and so that your arms bend slightly at the elbow when gripping the steering wheel.

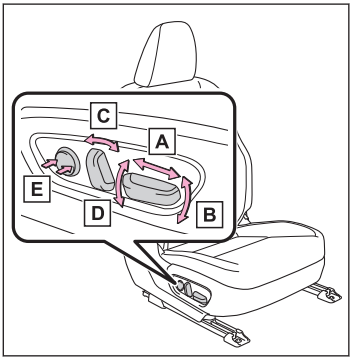

A Seat position adjustment switch
B Seat cushion (front) angle adjustment switch
C Seatback angle adjustment switch
D Vertical height adjustment switch
E Lumbar support firmness adjustment switch (for driver's side)

INFORMATION

When adjusting the seats

Take care so that a head restraint does not contact the ceiling or a sun visor.

⚠ WARNING

Observe the following when adjusting the seats.

- Do not adjust the position of the driver's seat while driving.

  Doing so could cause the driver to lose control of the vehicle.
- Be careful so that the seat does not contact and injure a passenger.
- Do not place anything under the front seats.

  Objects placed under the front seats may become jammed in the seat tracks and stop the seat from locking in place. This may lead to an accident and the adjustment mechanism may also be damaged.
- Do not put your hands under the seat or near the moving parts to avoid injury.

  Fingers or hands may become jammed in the seat mechanism.

⚠ WARNING

- Do not place a cushion between the driver or passenger and the seatback.

  A cushion may prevent correct posture from being achieved, and reduce the effectiveness of the seat belt and head restraint.

Adjusting the rear seats

Reclining adjustments and folding the seat backs can be done with the levers.

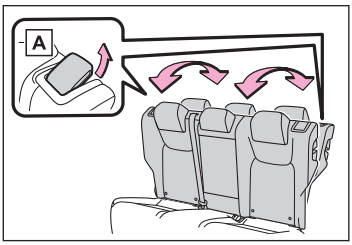

A Reclining adjustment

⚠ WARNING

Observe the following when adjusting the seatbacks.

- Keep other passengers from being hit with the seatback.
- Do not bring your hands close to the moving parts or between the seats, as well as do not let any part of your body get caught.
- To reduce the risk of sliding under the lap belt during a collision, do not recline the seat more than necessary.

  If the seat is reclined excessively, in a collision, one may slide under the lap belt and it may apply restraint forces directly to the abdomen, etc., or their neck may contact the shoulder belt.

Adjusting the head restraints

Head restraints are provided for all seats.

⚠ WARNING

Observe the following precautions regarding the head restraints. Failure to do so may result in death or serious injury.

- Use the head restraints designed for each respective seat.
- Adjust the head restraints to the correct position at all times.

⚠ WARNING

- After adjusting the head restraints, push down on them and make sure they are locked in position.
- Do not drive with the head restraints removed.

Adjusting the front seat head restraints vertically

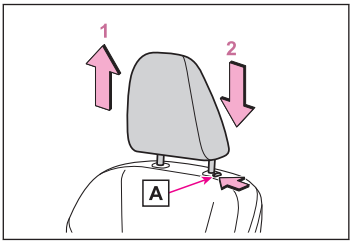

1 Up

Pull the head restraints up.

2 Down

Push the head restraint down while pressing the lock release button A.

Adjusting the rear seat head restraints vertically

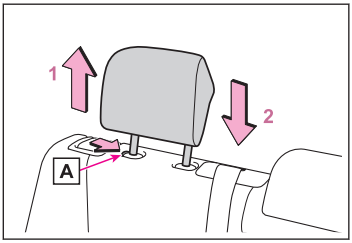

1 Up

Pull the head restraints up.

2 Down

Push the head restraint down while pressing the lock release button A.

INFORMATION

Adjusting the height of the head restraints



Make sure that the head restraints are adjusted so that the center of the head restraint is closest to the top of your ears

Adjusting the height of the head restraints

When the rear seat is to be used, make sure the head restraint is at least one step above the storage position.

Removing the head restraints

▶ Front seats

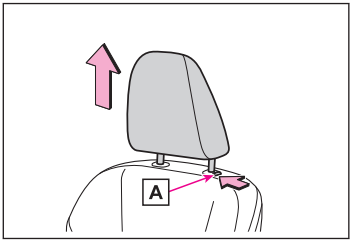

Pull the head restraint up while pressing the lock release button A.

If the head restraint touches the ceiling, making the removal difficult, change the seat height or angle.

▶ Rear seats

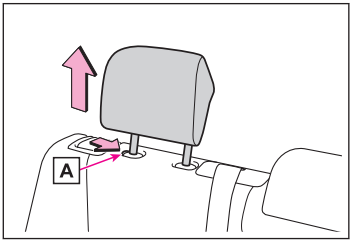

Pull the head restraint up while pressing the lock release button A.

Installing the head restraints

▶ Front seats

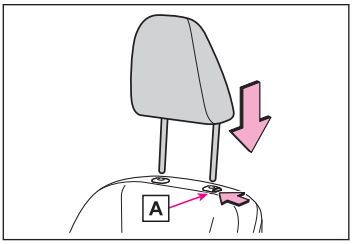

Align the head restraint with the installation holes and push it down to the lock position.

Press and hold the lock release button A when lowering the head restraint.

▶ Rear seats

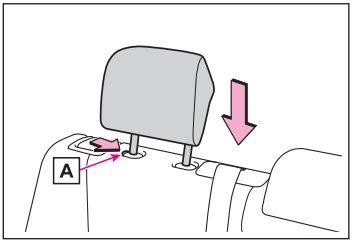

Align the head restraint with the installation holes and push it down to the lock position.

Press and hold the lock release button A when lowering the head restraint.

Using the seat belts

Make sure that all occupants are wearing their seat belts before driving the vehicle.

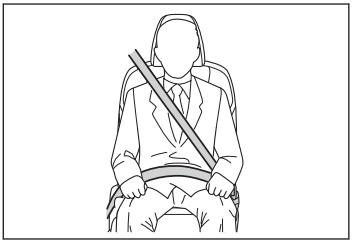

- Extend the shoulder belt so that it comes fully over the shoulder, but does not come into contact with the neck or slide off the shoulder.
- Position the lap belt as low as possible over the hips.
- Adjust the position of the seatback. Sit up straight and well back in the seat.
- Do not twist the seat belt.

⚠ WARNING

Observe the following precautions to reduce the risk of injury in the event of sudden braking, sudden swerving or an accident. Failing to do so may cause death or serious injury.

- Ensure that all passengers wear a seat belt.
- Always wear a seat belt properly.
- Each seat belt should be used by one person only.

  Do not use a seat belt for more than one person at once, including children.
- Lexus recommends that children be seated in the rear seat and always use a seat belt and/or an appropriate child restraint system.
- To achieve a proper seating position, do not recline the seat more than necessary. The seat belt is most effective when the occupants are sitting up straight and well back in the seats.
- Do not wear the shoulder belt under your arm.
- Always wear your seat belt low and snug across your hips.

⚠ WARNING

- Women who are pregnant should consult their doctor for any precautions for wearing the seat belt correctly.

  Position the lap belt as low as possible over the hips in the same manner as other occupants, extending the shoulder belt completely over the shoulder and avoiding belt contact with the rounding of the abdominal area.

  If the seat belt is not worn properly, not only the pregnant woman, but also the fetus could suffer death or serious injury as a result of sudden braking or a collision.

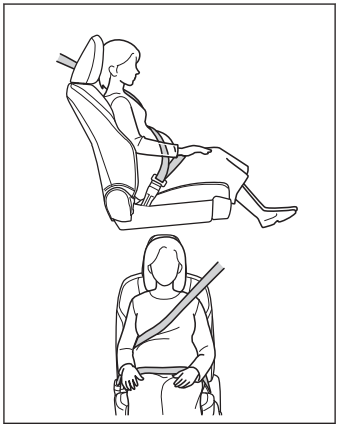

- Persons with a medical condition should consult their doctor for any precautions for wearing the seat belt correctly.
- Inspect the seat belt system periodically. Check for cuts, fraying, and loose parts. Do not use a damaged seat belt until it is replaced. Damaged seat belts cannot protect an occupant from death or serious injury.
- Replace the seat assembly, including the belts, if your vehicle has been involved in a serious accident, even if there's no obvious damage.
- Do not attempt to install, remove, modify, disassemble or dispose of the seat belts. Have any necessary repairs carried out by your Lexus dealer. Inappropriate handling may lead to incorrect operation.
- Do not allow children to play with the seat belt.

  If the seat belt becomes twisted around a child's neck, it may lead to choking or other serious injuries that could result in death.

  If this occurs and the buckle cannot be unfastened, scissors should be used to cut the belt.

INFORMATION

Child seat belt usage

The seat belts of your vehicle were principally designed for persons of adult size.

- Use a child restraint system appropriate for the child, until the child becomes large enough to properly wear the vehicle's seat belt.
- When the child becomes large enough to properly wear the vehicle's seat belt, follow the instructions regarding seat belt usage.

Seat belt regulations

If seat belt regulations exist in the country where you reside, please contact your Lexus dealer for seat belt replacement or installation.

Fastening and releasing the seat belts

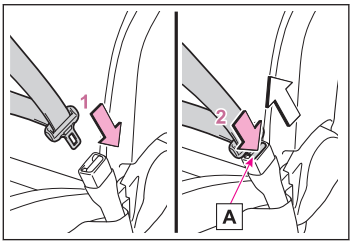

1. To fasten the seat belt, push the plate into the buckle until a click sound is heard.
2. To release the seat belt, press the release button A.

INFORMATION

Emergency locking retractor (ELR)

The retractor will lock the belt during a sudden stop or on impact. It may also lock if you lean forward too quickly. When the seat belt locks, pull the belt strongly and then release the belt, then a slow and easy pulling will allow the belt to extend.

⚠ WARNING

- Do not damage the seat belts by allowing the belt, plate, or buckle to be jammed in the door.
- Ensure that the belt and plate are locked and the belt is not twisted.

  If the seat belt does not function correctly, immediately contact your Lexus dealer.

Adjusting the height of the front seat belts

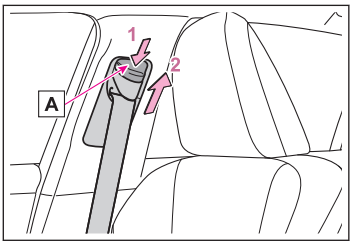

1. Push the seat belt shoulder anchor down while pressing the release button A.
2. Push the seat belt shoulder anchor up.

   Move the height adjuster up and down as needed until you hear a click.

⚠ WARNING

■ Adjustable shoulder anchor

Always make sure the shoulder belt is positioned across the center of your shoulder. The belt should be kept away from your neck, but not falling off your shoulder. Failure to do so could reduce the amount of protection in an accident and cause death or serious injuries in the event of a sudden stop, sudden swerve or accident.

Adjusting the position of the steering wheel and mirrors

Adjusting the position of the steering wheel horizontally/vertically

⚠ WARNING

Do not adjust the steering wheel while driving.

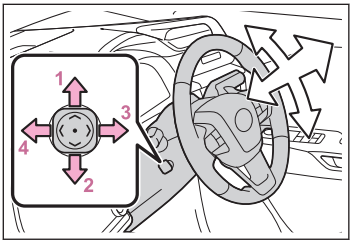

Operating the switch moves the steering wheel in the following directions:

1 Up
2 Down
3 Toward the driver
4 Away from the driver

INFORMATION

■ The steering wheel can be adjusted when

The power switch is in ACC or ON.*1

■ Automatic adjustment of the steering position

A desired steering position can be entered to memory and recalled automatically by the driving position memory system.

■ Power easy access system*

The steering wheel and driver's seat move in accordance with power switch mode and the driver's seat belt condition.

Adjusting the position of the inside rear view mirror

⚠ WARNING

Do not adjust the position of the mirror while driving.

Adjust the position of the inside rear view mirror so that the correct driving posture can be achieved.

*1: If the driver's seat belt is fastened, the steering wheel can be adjusted regardless of power switch mode.

*: If equipped

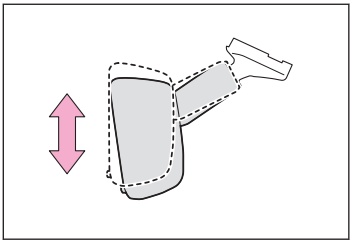

Adjust the inside rear view mirror vertically by grasping and moving it.

Digital Rear-view mirror effort and caution*

The Digital Rear-view Mirror is a system that uses the camera on the rear of the vehicle and displays its image on the display of the Digital Rear-view Mirror.

The Digital Rear-view Mirror can be changed between optical mirror mode and digital mirror mode by operating the lever.

The Digital Rear-view Mirror allows the driver to see the rear view despite obstructions, such as the head restraints or luggage, ensuring rear visibility. Also, the rear seats are not displayed and privacy of the passengers is enhanced.

⚠ WARNING

■ Before using the Digital Rear-view Mirror

Observe the following precautions. Failure to do so may result in death or serious injury.

- Make sure to adjust the mirror before driving.
  - Change to optical mirror mode and adjust the position of the Digital Rear-view Mirror so that the area behind your vehicle can be viewed properly.
  - Change to digital mirror mode and adjust the display settings.
- As the range of the image displayed by the Digital Rear-view Mirror is different from that of the optical mirror, make sure to check this difference before driving.

*: If equipped

System components of the Digital Rear-view Mirror

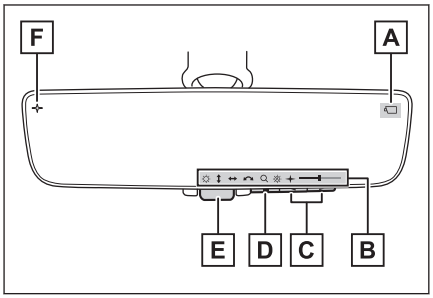

A Camera indicator

Indicates that the camera is operating normally.

B Icon display area

Displays icons, adjusting gauge, etc.

C Select/adjust button

Press to change the setting of the item you want to adjust. (→P.158)

D Menu button

Press to display the icon display area and select the item you want to adjust.

E Lever

Operate to change between digital mirror mode and optical mirror mode.

F Digital mirror anti-glare function indicator

Displayed in digital mirror mode when the anti-glare function of the digital mirror is enabled. (→P.158)

Changing modes of the Digital Rear-view Mirror

Operate the lever to change between digital mirror mode and optical mirror mode.

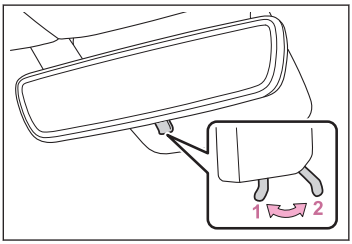

1 Digital mirror mode

Displays an image of the area behind the vehicle.

will illuminate in this mode.

2 Optical mirror mode

Turns off the display of the Digital Rearview Mirror allows it to be used as an optical mirror.

Digital mirror mode operating condition

The power switch is turned to ON.

When the power switch is changed from ON to OFF or ACC, the image will disappear after several seconds.

Precautions about digital mirror mode

If it is difficult to see the Digital Rear-view Mirror image because water, snow, mud, etc. is stuck to the camera lens, operate the rear window washer (→P.215) or change to optical mirror mode.

- When the back door is open, the Digital Rear-view Mirror image may not display properly. Before driving, make sure the back door is closed.
- If the display is difficult to see due to reflected light, in this case, change to optical mirror mode.
- Any of the following conditions may occur when driving in the dark, such as at night. None of them indicates that a malfunction has occurred.
  - Colors of objects in the displayed image may differ from their actual color.
  - Depending on the height of the lights of the vehicle behind, the area around the vehicle may appear white and blurry.
  - Automatic image adjustment for brighter surrounding image may cause flickering.

    If it is difficult to see the displayed image or flickering bothers you, change to optical mirror mode.
- The Digital Rear-view Mirror may become hot while it is in digital mirror mode. This is not a malfunction.
- Depending on your physical condition or age, it may take longer than usual to focus on the displayed image. In this case, change to optical mirror mode.
- Do not let passengers stare at the displayed image when the vehicle is being driven, as doing so may cause motion sickness.

When the system malfunctions

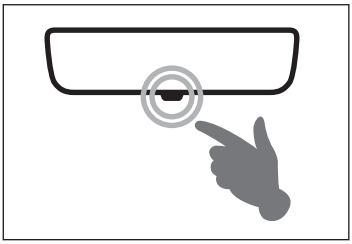

If the symbol shown in the illustration is displayed when using the Digital Rear-view Mirror in digital mirror mode, the system may be malfunctioning. The symbol will disappear in a few seconds.

Operate the lever, change to optical mirror mode and have the vehicle inspected by your Lexus dealer.

Adjusting the Digital Rear-view Mirror

Settings of the display in the digital mirror mode, on/off operation of the automatic anti-glare function, etc. can be changed.

1 **Press the menu button.**

The icons will be displayed.

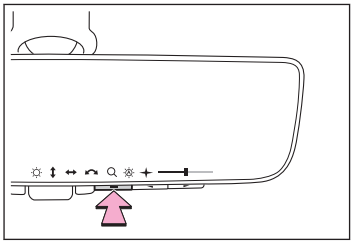

2 **Press the menu button repeatedly and select the item you want to adjust.**

3 **Press or to change the setting.**

The icons will disappear if a button is not operated for approximately 5 seconds or more.

Icons	Settings
	Select to adjust the brightness of the display.
	Select to adjust the area displayed up/down.
	Select to adjust the area displayed to the left/right.
	Select to adjust the angle of the displayed image.
	Select to zoom in/out the displayed image.
	Select to enable/disable the automatic anti-glare function.(1) Responding to the brightness of the headlights of vehicles behind, the reflected light is automatically adjusted. The automatic anti-glare function is enabled each time the power switch is changed to ON.
	The anti-glare function of the digital mirror can be enabled/disabled. When enabled, image on the digital mirror at nighttime will be displayed at a reduced brightness level, reducing the headlight glare of the following vehicle.

(1) This is a function for the optical mirror mode, however, the setting can also be changed while using the digital mirror mode.

Precautions when adjusting the Digital Rear-view Mirror

Display settings (digital mirror mode)

- The icons will disappear if a button is not operated for approximately 5 seconds or more.
- If the displayed image is adjusted, it may appear distorted. This is not a malfunction.
- If the brightness of the Digital Rear-view Mirror is set too high, it may cause eye strain. Adjust the Digital Rear-view Mirror to an appropriate brightness. If your eyes become tired, change to optical mirror mode.
- The brightness of the Digital Rear-view Mirror will change automatically according to the brightness of the area in front of your vehicle.
- The anti-glare function of the digital mirror is operational only when the surrounding area of the vehicle is dark enough. Depending on the brightness conditions of the surrounding area, the brightness of the displayed image on the digital mirror may not be reduced, not enabling to reduce the headlight glare of the following vehicle.

To prevent the light sensors from malfunctioning

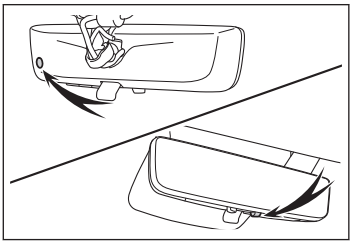

To prevent the light sensors from malfunctioning, do not touch or cover them.

⚠ WARNING

While driving

Observe the following precautions. Failure to do so may result in death or serious injury.

- Do not adjust the position of the Digital Rear-view Mirror or adjust the display settings while driving.

  Stop the vehicle and operate the Digital Rear-view Mirror control switches. Failure to do so may cause a steering wheel operation error, resulting in an unexpected accident.
- Always pay attention to the vehicle's surroundings.

⚠ WARNING

The size of the vehicles and other objects may look different when in digital mirror mode and optical mirror mode. When backing up, make sure to directly check the safety of the area around your vehicle, especially behind the vehicle. Additionally, if a vehicle approaches from the rear in the dark, such as at night, the surrounding area may appear dim.

Cleaning the Digital Rear-view Mirror

■ Cleaning the mirror surface

If the mirror surface is dirty, the image on the display may be difficult to see. Wipe the mirror surface gently using a soft dry cloth.

■ Cleaning the camera

If it is difficult to see the Digital Rear-view Mirror image because water, snow, mud, etc. is stuck to the camera lens, operate the rear window washer or change to optical mirror mode. (→P.156)

INFORMATION

■ The camera



The camera for the Digital Rear-view Mirror is located as shown.

■ Cleaning the camera with washer fluid

- When cleaning the camera, it may be difficult to see the image due to the washer fluid. Therefore, take care in the surrounding area while driving.
- If washer fluid remains on the camera lens surface after cleaning, the image may be difficult to see at night due to the height or inclination of the headlights of the vehicle behind. In this case, change to optical mirror mode.
- Some dirts may not be removed completely after cleaning. In this case, rinse the camera lens with a large quantity of water and then wipe it clean with a soft cloth dampened with water.
- Washer fluid is sprayed onto the camera lens surface. Therefore, the ice, snow, etc. adhering around the camera cannot be removed.

⚠ NOTICE

To prevent the camera from malfunctioning

- Observe the following precautions, otherwise the Digital Rear-view Mirror may not operate properly.
  - Do not strike or hit the camera or subject it to a strong impact, as the camera installation position and angle may be changed.
  - Do not remove, disassemble or modify the camera.
  - When washing the camera, rinse it with a large quantity of water and then wipe it clean with a soft cloth dampened with water. Do not strongly rub the camera lens, as it may be scratched and will not be able to transmit a clear image.
  - Do not allow organic solvent, car wax, window cleaner or glass coat to adhere to the camera cover. If this happens, wipe it off as soon as possible.
  - Do not apply hot water to the camera in cold weather, as the sudden change of temperature may cause the camera to not operate properly.
  - When using a high pressure washer to wash the vehicle, do not directly spray the camera and its surrounding area, as doing so may cause the camera to not operate properly.
- Do not subject the camera to a strong impact as this could cause a malfunction. If this happens, have the vehicle inspected by your Lexus dealer as soon as possible.
- Do not block the vent holes of the mirror. Otherwise, the mirror may be hot, leading to a malfunction or a fire.



If you notice any symptoms about the Digital Rear-view Mirror

If you notice any of the following symptoms, refer to the following table for the likely cause and the solution.

If the symptom is not resolved by the solution, have the vehicle inspected by your Lexus dealer.

Symptom	Likely cause	Solution
The image is difficult to see.	The mirror surface is dirty.	Clean the mirror surface gently, using a soft dry cloth.

Symptom	Likely cause	Solution
The image is difficult to see.	Sunlight or headlights are shining directly into the Digital Rear-view Mirror.	Change to optical mirror mode.
	● The vehicle is in a dark area. ● The vehicle is near a TV tower, broadcasting station, electric power plant, or other location where strong radio waves or electrical noise may be present. ● The temperature around the camera is extremely high/low. ● The ambient temperature is extremely low. ● It is raining or humid. ● Sunlight or headlights are shining directly into the camera lens. ● The vehicle is under fluorescent lights, sodium lights, mercury lights, etc.	Change to optical mirror mode. (Change back to digital mirror mode when the conditions have improved.)
	Foreign matters such as water droplets or dust is on the camera lens.	● Operate the dedicated camera cleaning washer and clean the camera lens.(→P.215) ● Change to optical mirror mode.
The image is out of alignment.	The back door is not fully closed.	Fully close the back door.
	The camera or its surrounding area has received a strong impact.	Change to optical mirror mode and have the vehicle inspected by your Lexus dealer.
The display is dim and  is displayed.	The system may be malfunctioning.	Change to optical mirror mode and have the vehicle inspected by your Lexus dealer.
 goes off.		

Symptom	Likely cause	Solution
♨ is displayed.	The Digital Rear-view Mirror is extremely hot. (The display will gradually become more dim. If the temperature continues to increase, the Digital Rear-view Mirror will turn off.)	Reducing the cabin temperature is recommended to reduce the temperature of the mirror. (♨ will disappear when the mirror becomes cool.) If ♨ does not disappear even though the mirror is cool, have the vehicle inspected by your Lexus dealer.
The lever cannot be operated properly.	The lever may be malfunctioning.	Change to optical mirror mode and have the vehicle inspected by your Lexus dealer. To change to optical mirror mode, press and hold the menu button for approximately 10 seconds.

Adjusting the angle of the outside rear view mirrors

⚠ WARNING

Do not adjust the position of the mirror while driving.

1 **To select a mirror to adjust, press the switch.**

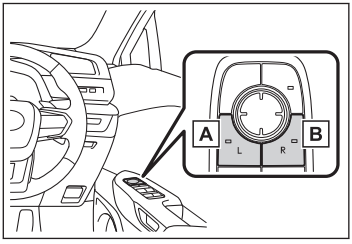

A Select the left mirror
B Select the right mirror

2 **To adjust the mirror, press the switch.**

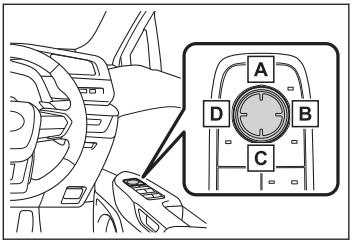

A Adjust the mirror surface up
B Adjust the mirror surface right
C Adjust the mirror surface down
D Adjust the mirror surface left

INFORMATION

Mirror angle can be adjusted when

The power switch is in ACC or ON.

Automatic adjustment of the mirror angle (vehicles with driving position memory)

A desired mirror face angle can be entered to memory and recalled automatically by the driving position memory.

Linked mirror function when reversing

When the mirror select switch is in the [L] or [R] position, the outside rear view mirrors will automatically angle downwards when the vehicle is reversing in order to give a better view of the ground.

To disable this function, move the mirror select switch to the neutral position (between [L] and [R])

With the shift position in R, adjust the mirror angle at a desired position to set the mirror angle used when the vehicle is reversing.

The adjusted angle will be memorized and the mirror will automatically tilt to the memorized angle whenever the shift position is shifted to R from next time.

The memorized downward tilt position of the mirror is linked to the normal position (angle adjusted with the shift position in other than R). Therefore, if the normal position is changed after adjustment, the tilt position will also change.

When the normal position is changed, readjust the angle in reversing.

Using the reverse-linked function when it is cold

When reverse-linked function used in cold weather, the door mirror could be frozen and may not automatically point the mirror surface downward. In this event, remove any ice and snow from the mirror surface.

Folding/extending the outside rear view mirrors

▶ Using the switch

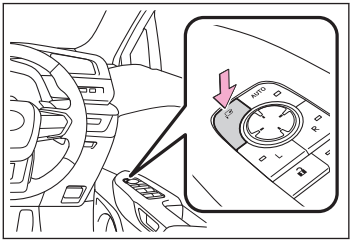

Press the switch to fold the mirrors.

Press it again to extend them to the original position.

▶ Setting automatic mode

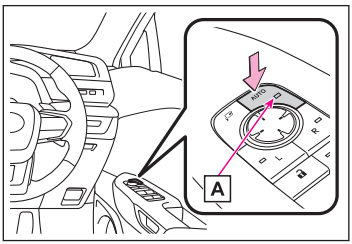

Automatic mode allows the folding or extending of the mirrors to be linked to locking/unlocking of the doors.

Press the switch to set automatic mode.

The indicator A will come on.

Pressing the switch once more will return to manual mode.

INFORMATION

■ When using the outside rear view mirrors in a cold weather

When it is cold and the outside rear view mirrors are frozen, it may not be possible to fold/extend them or adjust the mirror surface. Remove the ice, snow, etc. covering the outside rear view mirrors.

■ Customization

Some functions can be customized. (→P.681)

⚠ WARNING

Observe the following precautions.

- Do not drive with the mirrors folded.
- Do not touch an outside rear view mirror when it is moving. Failure to do so may lead to your finger being pinched or the mirror being damaged.
- As the mirror surface will be hot, do not touch an outside rear view mirror when the mirror heater is operating.
- Both the driver and passenger side mirrors must be extended and properly adjusted before driving.

2 Driving the vehicle

2-1. Starting and stopping the EV system

Starting the EV system 168

Stopping the EV system 172

2-2. Driving procedures

Driving procedure 173

Breaking in your new Lexus 176

Intended use of each shift position 177

Changing the shift position 178

Starting off 184

Informing the driver of the vehicle's dynamic conditions through sounds 185

Operations when turning left or right or changing lanes 186

Changing the regenerative braking power 187

2-3. Parking the vehicle

When parking the vehicle 188

Stopping 189

Parking the vehicle 190

Starting the EV system

Performing the following operations when carrying the electronic key on your person starts the EV system or changes power switch modes.

Starting the EV system

⚠ WARNING

■ When starting the EV system

Always start the EV system while sitting in the driver's seat. Do not depress the accelerator pedal while starting the EV system under any circumstances.

■ Caution while driving

If EV system failure occurs while the vehicle is moving, do not lock or open the doors until the vehicle reaches a safe and complete stop. Otherwise, the steering lock function* will activate and this may lead to an accident, resulting in death or serious injury.

⚠ NOTICE

■ When starting the EV system

If the EV system becomes difficult to start, have your vehicle checked by your Lexus dealer immediately.

■ Operation of the power switch

If the power switch seems to be operating somewhat differently than usual, such as the switch sticking slightly, there may be a malfunction. Contact your Lexus dealer immediately.

1 Check that the charging cable is disconnected.

2 Pull the parking brake switch to check that the parking brake is set. (→P.192)

The parking brake indicator will come on.

3 Firmly depress the brake pedal.

 and a message will be displayed on the multi-information display. If it is not displayed, the EV system cannot be started.

When the shift position is N, the EV system cannot start. Shift the shift position to P when starting the EV system. (→P.168)

*: If equipped

4 **Press the power switch shortly and firmly.**

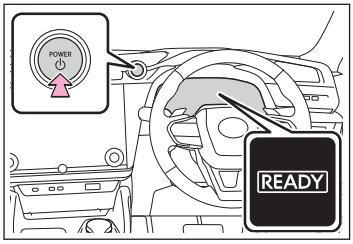

When operating the power switch, one short, firm press is enough. It is not necessary to press and hold the switch.

If the **"READY"** indicator turns on, the EV system will operate normally.

Continue depressing the brake pedal until the **"READY"** indicator is illuminated.

The EV system can be started from any power switch mode.

5 **Check that the "READY" indicator is illuminated.**

The vehicle will not move when the **"READY"** indicator is off.

INFORMATION

Power switch illumination

According to the situation, the power switch illumination operates as follows.

- If a door is open or the power switch is turned from ACC or ON to OFF, the power switch light will illuminate dimly.
- If the brake pedal is depressed while carrying an electronic key, the power switch light will illuminate brightly.
- When the power switch is in ACC or ON, the power switch illumination illuminates.

If the EV system does not start

- The immobilizer system may not have been deactivated. Contact your Lexus dealer.
- The charging cable may be connected to the vehicle.
- If a message related to start-up is shown on the multi-information display, read the message and follow the instructions.
- If the door is unlocked with the mechanical key, the EV system cannot be started using the smart entry & start system. Refer to P.595 to start the EV system. However, if the electronic key is carried inside the vehicle and the doors are locked (→P.102), the EV system can be started.

When the ambient temperature is low, such as during winter driving conditions

- When starting the EV system, the flashing time of the **"READY"** indicator may be long. Leave the vehicle as it is until the **"READY"** indicator is steady on, as steady means the vehicle is able to move.
- When the EV battery (traction battery) is extremely cold (below approximately -30°C [-22°F]) under the influence of the outside temperature, it may not be possible to start the EV system. In this case, try to start the EV system again after the temperature of the EV battery increases due to the outside temperature increase etc.

Steering lock function*

After turning the power switch off and opening and closing the doors, the steering wheel will be locked due to the steering lock function. Operating the power switch again automatically cancels the steering lock.

If the "READY" indicator does not come on

In the event that the "READY" indicator does not come on even after performing the proper procedures for starting the vehicle, contact your Lexus dealer immediately.

Operation of the power switch

- If the switch is not pressed shortly and firmly, the power switch mode may not change or the EV system may not start.
- If attempting to restart the EV system immediately after turning the power switch off, the EV system may not start in some cases. After turning the power switch off, please wait a few seconds before restarting the EV system.

Changing the power switch mode

Modes can be changed by pressing the power switch with brake pedal released. (The mode changes each time the switch is pressed.)

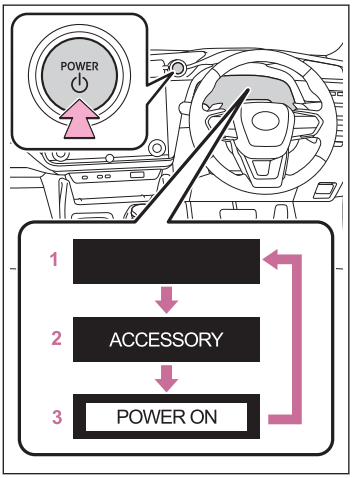

1 OFF

The emergency flashers can be used.

2 ACC*1

Some electrical components such as the audio system can be used. "ACCESSORY" will be displayed on the meter.

3 ON

All electrical components can be used. "POWER ON" will be displayed on the meter.

*: If equipped

*1: ACC mode can be enabled/disabled on the customize menu. (→P.691)

INFORMATION

When ACC customization is in off

- With the power switch is turned off, the center display can still be used for a certain time until the battery saving function starts operating.
- When the safe exit assist is operating, a buzzer will sound and a voice guidance will be given.

Auto power off function

- If the vehicle is left in ACC or ON (the EV system is not operating) for more than 20 minutes with the shift position in P, the power switch will automatically turn to OFF.
- If the 12-volt battery is low with the shift position is in P and the power switch is in ACC or ON (the EV system is not operating). The power switch is automatically turn to OFF.

However, this function cannot entirely prevent the 12-volt battery discharge. Do not leave the vehicle with the power switch in ACC or ON for long periods of time when the EV system is not operating.

When the shift control system malfunctions

When attempting to turn the power switch off while there is a malfunction in the shift control system, the power switch mode may change to ACC. In this case, ACC may be turned off by applying the parking brake and pressing the power switch again.

If there is a malfunction in the system, have the vehicle inspected by your Lexus dealer immediately.

NOTICE

Do not leave the vehicle with the power switch in ACC or ON for long periods of time when the EV system is not operating.

If "ACCESSORY" or "POWER ON" is displayed on the meters while the EV system is not operating, the power switch is not off. Exit the vehicle after turning the power switch off.

Stopping the EV system

Stopping the EV system

⚠ WARNING

If you want to stop the EV system in an emergency while driving the vehicle, press and hold the power switch for more than 2 seconds, or press it briefly 3 times or more in succession.

However, do not touch the power switch while driving, except in an emergency. Turning the EV system off while driving will not cause loss of steering or braking control, however power assist to the steering will be lost. This will make it more difficult to steer. Pull over and stop the vehicle as soon as it is safe to do so.

1 **Stop the vehicle completely.**

2 **Set the parking brake.** (→P.190)

Check the parking brake indicator is illuminated.

3 **Press the P position switch.** (→P.178)

Check that the shift position indicator shows P and the parking brake indicator is illuminated.

4 **Press the power switch shortly and firmly.**

The EV system will stop, and the meter display will be extinguished (the shift position indicator will be extinguished a few seconds after the meter display).

5 **Release the brake pedal and check that "ACCESSORY" or "POWER ON" is not shown on the meter.**

Driving procedure

⚠ WARNING

■ When driving the vehicle

- If the vehicle is coasting due to the EV system being stopped, etc., do not operate the door locks or open a door until the vehicle has been safely stopped. Doing so may cause the steering lock function* to operate, possibly leading to an accident.
- When backing up, you may twist your body around, leading to difficulty in operating the pedals.

  Make sure to operate the pedals properly.
- Make sure to keep a correct driving posture even when moving the vehicle only slightly. This allows you to depress the brake and accelerator pedals properly.
- Depress the brake pedal using your right foot.

  Depressing the brake pedal using your left foot may delay response in an emergency, resulting in an accident.
- The driver should pay extra attention to pedestrians. As there is no engine noise, the pedestrians may misjudge the vehicle's movement.
- Never turn the power switch off during normal driving. If the EV system is stopped while driving, steering and brake operations will still be possible, however, power assist will no longer be provided and the steering wheel will become difficult to operate. After checking the safety of the area around your vehicle, stop the vehicle on the side of the road. In an emergency, if the vehicle cannot be stopped normally, perform an emergency stop.
- Use regenerative braking to maintain a safe speed when driving down a steep hill. Using the brakes continuously may cause the brakes to overheat and lose effectiveness.
- If **"Regenerative Braking Limited Press Brake to Decelerate"** appears on the multi-information display, firmly depress the brake pedal to decelerate the vehicle. (→P.593)
- Do not adjust the positions of the steering wheel, the seat, or the inside or outside rear view mirrors while driving. Doing so may result in a loss of vehicle control.
- Always check that all passengers' arms, heads or other parts of their body are not outside the vehicle.
- This vehicle is not designed for extreme off-roading.
  - When driving in sand or mud is unavoidable, drive carefully and avoid continuous driving on sand or mud.
  - Do not drive on extremely rocky roads or extremely uneven roads.

*: If equipped

⚠ WARNING

- Do not drive across a river or through other bodies of water. This may cause electric/electronic components to short circuit, damage the EV system or cause other serious damage to the vehicle.
- Avoid sudden braking, acceleration, and steering inputs when driving on slick road surfaces. Doing so may cause the tires to lose traction, leading to loss of control of the vehicle.
- Sudden acceleration or regenerative braking due to shift changing could cause the vehicle to skid, resulting in an accident.
- After driving through a puddle, lightly depress the brake pedal to make sure that the brakes are functioning properly. Wet brake pads may prevent the brakes from functioning properly. If the brakes on only one side are wet and not functioning properly, steering control may be affected.
- When driving in sand or mud is unavoidable, drive carefully and avoid continuous driving on sand or mud.

  Do not drive on extremely rocky roads or extremely uneven roads.
- Avoid spinning the wheels and depressing the accelerator pedal more than necessary.

  Doing so may damage the transmission and other components.

■ If you hear a squealing or scraping noise (brake pad wear limit indicators)

Have the brake pads checked and replaced by your Lexus dealer as soon as possible.

Rotor damage may result if the pads are not replaced when needed.

It is dangerous to drive the vehicle when the wear limits of the brake pads and/or those of the brake discs are exceeded.

⚠ NOTICE

■ Avoiding damage to vehicle parts

- Do not turn and hold the steering wheel at either fully turned position for an extended period of time. Doing so may damage the power steering.
- When driving over bumps or areas where the road height changes, drive as slowly as possible. Otherwise the wheels, etc. may be damaged.

■ If you get a flat tire while driving

In the following situations, firmly hold the steering wheel and gradually apply the brakes to decrease the vehicle's speed, as a tire may be flat or damaged:

- When the steering wheel pulls either direction
- When there are abnormal sounds or vibrations

⚠ NOTICE

- When the vehicle leans abnormally

■ When encountering flooded roads

Do not drive on roads which have become flooded due to heavy rain, etc.

Doing so may cause serious damage to the vehicle, such as the following:

- Shorts in electrical components
- Traction battery caused by water immersion

In the event that you drive on a flooded road and the vehicle is flooded, be sure to have your Lexus dealer check the following:

- Brake function
- Changes in quantity and quality of transmission fluid, etc.
- Lubricant condition for the bearings and suspension joints (where possible), and the function of all joints, bearings, etc.
- Components connected to the traction battery.

  If the shift control system is damaged by flooding, it may not be possible to change the shift position to P, or from P to other positions.

  In this case, contact your Lexus dealer.

■ When involved in a minor accident

Damage to the traction battery or battery peripheral components could cause malfunctions. Even if it is a minor accident, have the vehicle inspected by your Lexus dealer.

Breaking in your new Lexus

To extend the life of the vehicle, observing the following precautions is recommended:

- For the first 300 km (200 miles):

  Avoid sudden stops.

- For the first 1000 km (600 miles):
  - Do not drive at extremely high speeds.
  - Avoid sudden acceleration.
  - Do not drive at a constant speed for extended periods.

- For the first 800 km (500 miles):

  Do not tow a trailer. (vehicles with towing package)

Intended use of each shift position

Select the shift position depending on your purpose and situation.

Shift position	Objective or function
P	Parking the vehicle/starting the EV system
R	Reversing
N	Neutral (Condition in which the power is not transmitted)
D	Normal driving

INFORMATION

If a message about a shift operation is shown

To prevent the shift position from being selected incorrectly or the vehicle from moving unexpectedly, the shift position may be changed automatically or operating the rotary shifter may be required. In this case, change the shift position following the messages on the multi-information display.

Reverse warning buzzer

When shifting into R, a buzzer will sound to inform the driver that the shift position is in R.

⚠ WARNING

Avoid sudden accelerator pedal operations and shift operations when driving on slick road surfaces, as this could result in the vehicle skidding to the side or spinning.

⚠ NOTICE

Situations where shift control system malfunctions are possible

If any of the following situations occurs, shift control system malfunctions are possible.

Immediately stop the vehicle in a safe place on level ground, apply the parking brake, and then contact your Lexus dealer.

- When the warning message indicating the shift control system appears on the multi-information display. (→P.577)
- The display indicates that no shift position is selected for more than a few seconds.

Traction battery charge

If the shift position is in N, the traction battery will not be charging. Therefore, if the vehicle is left with the shift position in N, the traction battery will discharge, and this may result in the vehicle not being able to start.

Changing the shift position

⚠ WARNING

- Do not let the vehicle roll backward while a forward driving position is selected, or roll forward while the shift position is in R.

  Doing so may result in an accident or damage to the vehicle.
- Do not shift the shift position to P while the vehicle is moving. Doing so can damage the transmission and may result in a loss of vehicle control.
- Do not shift the shift position to R while the vehicle is moving forward. Doing so can damage the transmission and may result in a loss of vehicle control.
- Do not shift the shift position to a driving position while the vehicle is moving backward. Doing so can damage the transmission and may result in a loss of vehicle control.
- Changing the shift position to N while the vehicle is moving will disengage the EV system. Regenerative braking is not available with the EV system disengaged.
- Be careful not to change the shift position with the accelerator pedal depressed. Changing the shift position to any positions other than P or N may lead to unexpected rapid acceleration of the vehicle that may cause an accident and result in death or serious injury. After changing the shift position, make sure to confirm the current shift position displayed on the shift position indicator inside the meter.

Shift position display and how to change the shift position

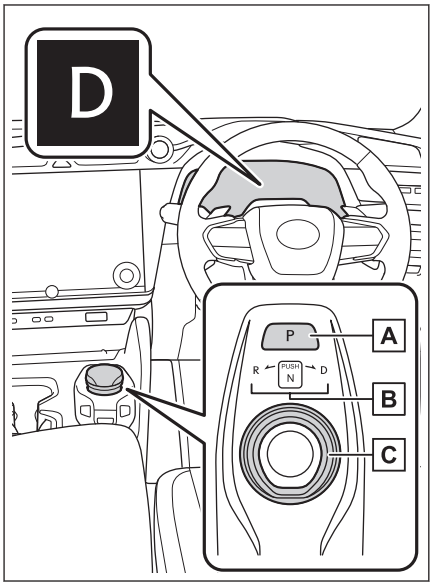

A P position switch

Fully stop the vehicle and set the parking brake, and then press the P position switch.

When the shift position is changed to P, the switch illuminates.

Check that the shift position indicator shows P.

B Shift position indicator

- Meter display:

  The current shift position is illuminated.

- Rotary shifter display:

  The current shift position is illuminated.

  When selecting the shift position, make sure that the shift position has been changed to the desired position by checking the shift position indicator provided on the instrument cluster.

C Rotary shifter

Operate the dial shift gently and securely.

To switch to N, hold down the dial shift and hold it for a while.

To switch to R or D, hold down the dial shift and turn left or right according to the arrow on the shift position indicator.

Release the rotary shifter after each shifting operation to allow it to return to its regular position.

When shifting from P to N, D or R, from N, D or R to P, from D to R, or from R to D, ensure that the brake pedal is being depressed and the vehicle is stationary.

INFORMATION

Changing the shift position in each power switch mode

- The shift position cannot be changed when the power switch is in ACC or off.
- When the power switch is in ON, if the "READY" indicator is not illuminated, the shift position can only be changed to N.
- When the "READY" indicator is illuminated, the shift position can be changed from P to D, N, or R.
- When the "READY" indicator is flashing, the shift position cannot be changed from P to any other position, even if the rotary shifter is operated. Operate the rotary shifter again after the "READY" indicator changes from flashing to illuminated.

Shifting the shift position from P to other positions

- While depressing the brake pedal firmly, operate the rotary shifter. If the rotary shifter is operated without depressing the brake pedal, the buzzer will sound and the shifting operation will be disabled.
- When selecting the shift position, make sure that the shift position has been changed to the desired position by checking the shift position indicator provided on the instrument cluster.

The shift position cannot be changed when

In the following situations, a buzzer will sound to inform you that the shift position cannot be changed. Use the appropriate operation to attempt to change the shift position again.

- When attempting to change the shift position from P with the brake pedal not depressed
- When attempting to change the shift position from P with the accelerator pedal depressed
- When attempting to change the shift position from N while stopped or driving at an extremely low speed with the brake pedal not depressed
- When attempting to change the shift position from N while stopped or driving at an extremely low speed with the accelerator pedal depressed
- When the P position switch is pressed while driving

  When driving at an extremely low speed, the shift position may change to P.

The shift position automatically changes to N when

In the following situations, a buzzer will sound to inform you that the shift position has been changed to N. Use the appropriate operation to attempt to change the shift position again.

- When attempting to change the shift position to R while the vehicle is moving forward

  When driving at a low speed, the shift position may change to R.

- When attempting to change the shift position to D while the vehicle is moving backward

  When driving at a low speed, the shift position may change to D.

If the N shift position is selected while driving

If the N shift position is selected while driving above a certain speed, the shift position will change to N without holding the rotary shifter in the N position. In this situation, a buzzer will sound and a message will be displayed on the multi-information display to inform you that the shift position has been changed to N.

Automatic P position selection function

In the following situations, the shift position is automatically changed to P.

- When pressing the power switch with the vehicle stopped while the power switch is in ON and the shift position is in a position other than P (after the shift position has changed to P, the power switch will turn off)*1
- If the driver's door is opened and all of the following conditions are met, while the shift position is in a position other than P
  - The power switch is in ON.
  - The driver is not wearing the seat belt.
  - The brake pedal is not depressed.

  To start off the vehicle after the shift position is changed to P, operate the rotary shifter again.
- When the vehicle is stopped after the EV system has been stopped in an emergency while driving.
- When voltage of the 12-volt battery drops while the shift position is in a position other than P.

If the shift position cannot be shifted from P

There is a possibility that the 12-volt battery is discharged. Check the 12-volt battery in this situation. (→P.597)

*1: When the power switch is pressed while driving at extremely slow speeds, such as immediately before stopping the vehicle, the shift position may automatically change to P. Make sure that the vehicle is completely stopped before pressing the power switch.

⚠ WARNING

■ For the rotary shifter

- Do not remove the rotary shifter knob or use anything but a genuine Lexus rotary shifter knob. Also, do not hang anything on the rotary shifter. Doing so could prevent the rotary shifter from returning to position, causing unexpected accidents to occur when the vehicle is in motion.
- In order to prevent the shift position from accidentally being changed, do not touch the rotary shifter when not using them.

■ P position switch

- Do not press the P position switch while the vehicle is moving.

  If the P position switch is pressed when driving at very low speeds (for example, directly before stopping the vehicle), the vehicle may stop suddenly when the shift position switches to P, which could lead to an accident.
- In order to prevent the shift position from accidentally being changed, do not touch the P position switch when not using them.

⚠ NOTICE

■ When exiting the vehicle (driver's seat only)

Check that the shift position indicator shows P and that the parking brake indicator is illuminated before opening the door and exiting the vehicle.

Keeping the shift position in N without activating the automatic P position selection function

By performing the following operation, the shift position can be held in N until the shift position switches to P without activating the automatic P position selection function.

1. **Operate the rotary shifter and change the shift position to N when the EV system is operating.**
2. **Return the rotary shifter to its regular position.**
3. **Operate the rotary shifter to N and hold it there until the buzzer sounds.**
4. **Press the power switch within 5 seconds after the buzzer sounds.**

   The EV system stops with the shift position in N[*1]

*1: To keep this state, do not operate the power switch. If the power switch is operated repeatedly, the power switch will turn off after the shift position has automatically changed to P.

Make sure to check that the buzzer sounds and **"Holding N Push P Switch When Done"** is displayed on the multi-information display.

- In order to shift to a position other than N, first press the P position switch to change the shift position to P.
- If the automatic P position switching operation selection function is performed operated with the EV system stopped, the automatic P position selection function may not operate. Always perform the operation with the EV system started.

Starting off

1 With the brake pedal depressed, shift the shift position to D.

Check that the shift position indicator shows D.

⚠ WARNING

Always keep your foot on the brake pedal while stopped with the "READY" indicator is illuminated. This prevents the vehicle from creeping.

2 If the parking brake is set, release the parking brake. (→P.190)

If the parking brake is in automatic mode, the parking brake will be released automatically. (→P.189)

3 Gradually release the brake pedal and gently depress the accelerator pedal to accelerate the vehicle.

Starting off on a steep uphill

1 Firmly depress the brake pedal and shift the shift position to D.

The hill-start assist control will be activated.

⚠ WARNING

Always keep your foot on the brake pedal while stopped with the "READY" indicator is illuminated. This prevents the vehicle from creeping.

2 Set the parking brake. (→P.192)

3 Release the brake pedal and gently depress the accelerator pedal to accelerate the vehicle.

4 Release the parking brake. (→P.192)

Informing the driver of the vehicle's dynamic conditions through sounds

ASC (Acceleration Sound Control)

The ASC, which generates specialized sounds and sends them into the cabin from the front and rear, is a system designed to enhance the driver's feel of the vehicle's dynamic conditions, such as accelerating and decelerating.

INFORMATION

Customization

Some functions can be customized. (→P.682)

Operations when turning left or right or changing lanes

By operating the turn signal lever, the intent of the driver can be shown as follows.

- The turn signal lights can be operated when the power switch is in ON.
- Check that all the turn signal lights are flashing.

  When the indicators flash at an abnormally fast speed even though all the turn signal lights are flashing, have the vehicle inspected by your Lexus dealer.

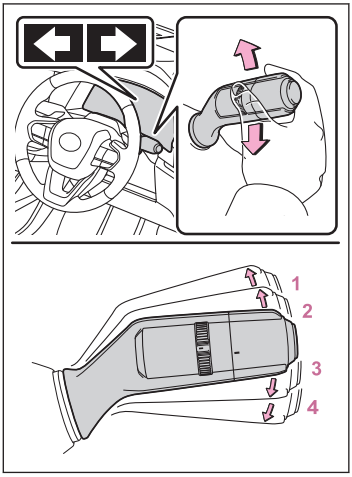

1 Move the lever to position 1.

The left turn signal lights will blink.

2 Move the lever to position 2 and release it.

The left hand signals will flash 3 times.

3 Move the lever to position 3 and release it.

The right hand signals will flash 3 times.

4 Move the lever to position 4.

The right turn signal lights will blink.

Changing the regenerative braking power

Operating the paddle shift switches enables driving with a fixed regenerative braking power when the accelerator pedal is released or the brake pedal is depressed.

Selecting regenerative braking power

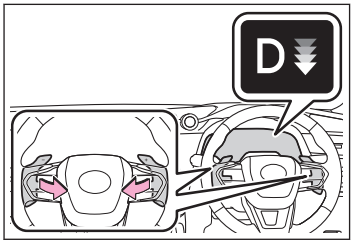

To drive using regenerative braking power selection, operate the [-] or [+] paddle shift switches with the shift position in D.

The regenerative braking power can then be selected by operating the [-] and [+] paddle shift switches.

To return to normal D position driving, hold the [+] paddle shift switch for a certain amount of time.

- The regenerative braking power can be selected from 4 levels.
- The regenerative braking power becomes strong as the number of the arrows of (regenerative braking power indicator) on the multi-information display increases.

INFORMATION

Using regenerative brake

- When driving at a high speed, the feeling of deceleration with regenerative braking is less than that on conventional vehicles.
- If **"Regenerative Braking Limited Press Brake to Decelerate"** appears on the multi-information display, firmly depress the brake pedal to decelerate the vehicle.

When parking the vehicle

Precautions for when the vehicle is stopped or parked

⚠ WARNING

■ When the vehicle is parked

- Always apply the parking brake, shift the shift position to P, stop the EV system and lock the vehicle. Do not leave the vehicle unattended while the "READY" indicator is illuminated.

  If the vehicle is parked with the shift position in P but the parking brake is not set, the vehicle may start to move, possibly leading to an accident.
- Never leave a child unattended in the vehicle. A child may accidentally release the parking brake and the vehicle may move, possibly leading to an accident.
- Do not leave glasses, cigarette lighters, spray cans or carbonated drink cans in the vehicle when it is parked in the sun. If left in the vehicle, the following may occur:
  - Gas may leak from a cigarette lighter or spray can, and may lead to a fire.
  - The temperature inside the vehicle may cause the plastic lenses and plastic material of glasses to deform or crack.
  - Soft drink cans may explode, dirtying the interior and possibly causing a short in electronic components.
- Do not store cigarette lighters in the vehicle storage features or leave them inside the vehicle.

  When luggage is loaded or a seat is adjusted, a lighter may be unintentionally lit, possibly leading to a fire.
- Do not attach suction cups to the glass parts of the vehicle. Also, do not place air fresheners or other clear containers on the instrument panel or dashboard. Suction cups and clear containers may act as a lens, possibly leading to a fire inside the vehicle.
- Do not leave a door or window open if the curved glass is coated with a metallized film such as a silver-colored one.

  Reflected sunlight may cause the glass to act as a lens, causing a fire.

■ When taking a nap in the vehicle

Always turn the EV system off. Otherwise, you may accidentally move the rotary shifter or depress the accelerator pedal, causing the vehicle to unintentionally move, which can lead to an accident, resulting in death or serious injury.

Stopping

1 Depress the brake pedal.

⚠ WARNING

- Drive more carefully than normal when the brakes are wet. When the brakes are wet, the braking distance will increase. Also, the brakes will be difficult to apply and, depending on the situation, braking performance may differ between the left and right sides. Additionally, the parking brake may not be able to be securely applied.
- If the electronically controlled brake system does not operate, do not follow other vehicles closely and avoid hills or sharp turns that require braking.In this case, braking is still possible, but the brake pedal should be depressed more firmly than usual. Also, the braking distance will increase. Have your brakes fixed immediately.
- If the brake hydraulic system malfunctions, have it repaired immediately. The brake system consists of 2 or more independent systems and if 1 hydraulic system fails, the other systems will operate. In this situation, it will be necessary to depress the brake pedal more than normal and braking distance will be increased.

⚠ NOTICE

Do not use the accelerator pedal or depress the accelerator and brake pedals at the same time to hold the vehicle on a hill.

2 If necessary, set the parking brake. (→P.192)

If the vehicle is to be stopped for an extended period of time, shift the shift position to P. (→P.179)

⚠ WARNING

■ When the vehicle is stopped

- Do not depress the accelerator pedal unnecessarily.

  If the vehicle is in any gear other than P or N, the vehicle may accelerate suddenly and unexpectedly, causing an accident.
- In order to prevent accidents due to the vehicle rolling away, always keep depressing the brake pedal while stopped with the "READY" indicator is illuminated, and apply the parking brake as necessary.
- If the vehicle is stopped on an incline, in order to prevent accidents caused by the vehicle rolling forward or backward, always depress the brake pedal and securely apply the parking brake as needed.

Parking the vehicle

1 Depress the brake pedal to stop the vehicle completely.

2 If the parking brake is released, set the parking brake. (→P.190)

3 Shift the shift position to P. (→P.179)

Check that the shift position indicator shows P and the parking brake indicator is illuminated.

⚠ WARNING

Always set the parking brake, and shift the shift position to P. Failure to do so may cause the vehicle to move or the vehicle may accelerate suddenly if the accelerator pedal is accidentally depressed.

4 Press the power switch to stop the EV system.

5 Slowly release the brake pedal.

6 Lock the door, making sure that you have the electronic key on your person.

If parking on a hill, block the wheels as needed.

Parking brake operation

The parking brake can be applied or released automatically (automatic mode) or manually (manual mode). In automatic mode, the parking brake is applied or released automatically according to the operation of the rotary shifter. Also, in automatic mode the parking brake can be applied or released manually.

⚠ WARNING

■ When parking the vehicle

Do not leave a child in the vehicle alone. The parking brake may be released unintentionally by a child and there is the danger of the vehicle moving that may lead to an accident resulting in death or serious injury.

■ Parking brake switch

Do not set any objects near the parking brake switch. Objects may interfere with the switch and may lead the parking brake to unexpectedly operate.

■ Parking brake automatic lock function

Never use the automatic parking brake engagement function in place of normal parking brake operation. This function is designed to reduce the risk of a collision due to the driver forgetting to engage the parking brake. Over-reliance on this function to park the vehicle safely may lead to an accident resulting in death or serious injury.

NOTICE

When parking the vehicle

- Before you leave the vehicle, shift the shift position to P, set the parking brake and make sure that the vehicle does not move.

When the system malfunctions

Stop the vehicle in a safe place and check the warning messages.

When the vehicle 12-volt battery is discharged

The parking brake system cannot be activated.

When the parking brake cannot be released due to a malfunction

Driving the vehicle with the parking brake set will lead to brake components overheating, which may affect braking performance and increase brake wear. Have the vehicle inspected by your Lexus dealer immediately if this occurs.

INFORMATION

Parking brake operation

- When the power switch is not in ON, the parking brake cannot be released using the parking brake switch.
- When the power switch is not in ON, automatic mode (automatic brake setting and releasing) is not available.

Parking brake automatic release function

When all of the following conditions are met, the parking brake can be released by depressing the accelerator pedal.

- The driver's door is closed
- The driver is wearing the seat belt
- The dial shift is in a forward driving position or reverse driving position
- The malfunction indicator lamp or brake system warning light is not illuminated.

When depressing the accelerator pedal, depress it slowly.

If the parking brake is not released when the accelerator pedal is depressed, release the parking brake manually.

When the shift position is shifted from P, the parking brake will be released automatically.

Parking brake operation sound

When the parking brake operates, a motor sound (whirring sound) may be heard. This does not indicate a malfunction.

■ **Parking brake indicator light**

- Depending on the power switch mode, the parking brake indicator light will turn on and stay on as described below:

  ON: Comes on until the parking brake is released.

  Not in ON: Stays on for approximately 15 seconds.

- When the power switch is turned off with the parking brake set, the parking brake indicator light will stay on for about 15 seconds. This does not indicate a malfunction.

■ **When the parking brake switch malfunctions**

Automatic mode (automatic brake setting and releasing) will be turned on automatically.

■ **Parking brake engaged warning buzzer**

A buzzer will sound if the vehicle is driven with the parking brake engaged. **"Parking Brake ON"** is displayed on the multi-information display (with the vehicle reaching a speed of 5 km/h [3 mph]).

Automatic applying/releasing of the parking brake (auto mode)

■ **Turning the automatic mode on**

While the vehicle is stopped, pull and hold the parking brake switch until a buzzer sounds and a message is shown on the multi-information display.

When the automatic mode is turned on, the parking brake operates as follows.

- When the shift position is shifted from P, the parking brake will be released, and the parking brake indicator light will turn off.
- When the shift position is shifted to P, the parking brake will be set, and the parking brake indicator light will turn on.

Operate the dial shift and P position switch with the vehicle stopped and the brake pedal depressed.

The auto function may not operate if the rotary shifter is moved extremely quickly. In this situation, apply the parking brake manually.

■ **Turning the automatic mode off**

While the vehicle is stopped and depressing the brake pedal, press and hold the parking brake switch until a buzzer sounds and a message is shown on the multi-information display.

Manual applying/releasing of the parking brake (manual mode)

The parking brake can be set and released manually.

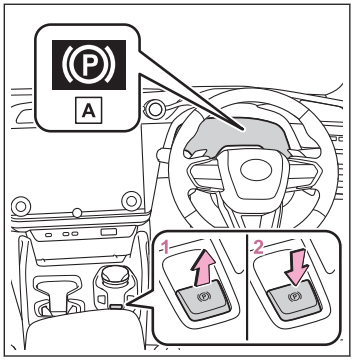

A Parking brake indicator light

1 Pull the switch to set the parking brake.

The parking brake indicator light will turn on.

Pull and hold the parking brake switch if an emergency occurs and it is necessary to operate the parking brake while driving.

2 Press the switch to release the parking brake.

- Operate the parking brake switch while depressing the brake pedal.
- Using the parking brake automatic release function, the parking brake can be released by depressing the accelerator pedal. When using this function, slowly depress the accelerator pedal.

Make sure that the parking brake indicator light turn off.

If the parking brake indicator light flash, operate the switch again.

3 Driving according to the conditions

3-1. Driving when the surrounding area is dark

Using the headlights 196

Automatically changing between the low beam headlights and high beam headlights 200

3-2. Driving when the surrounding area is bright

Using the sun visors 208

Inside rear view mirror anti-glare function (vehicles with auto anti-glare inside rear view mirror) 209

Digital Rearview Mirror anti-glare function (optical mirror mode) 210

3-3. Driving in the rain

Precautions for driving in the rain 211

Ensuring visibility in the rain 212

3-4. Driving when the windows or mirrors are fogged up

Defog the windshield 216

Defog the rear window 217

Defog the outside rear view mirrors 218

3-5. Driving when it is cold

Preparing for cold weather 219

Cold weather driving tips 222

3-6. Driving in low visibility conditions

Multi Weather Lights illumination 224

Rear fog lights illumination 225

Sounding the horn 227

3-7. Utility vehicle precautions

Utility vehicle precautions 228

3-8. Changing the driving characteristics

Driving modes 231

Changing the driving mode 233

3-9. Brake hold system

Brake hold system 234

Using the headlights

The headlights can be operated manually or automatically.

Turning the headlights on/off

NOTICE

■ To prevent 12-volt battery discharge

Do not leave the lights on longer than necessary when the EV system is off.

Operating the switch turns on the lights as follows:

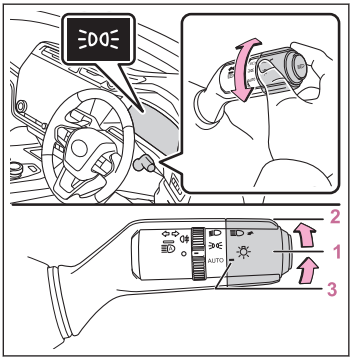

1. The front position, tail, license plate and instrument panel lights turn on.
2. The headlights and all lights listed above turn on.
3. AUTO The headlights, daytime running lights and all the lights listed above turn on and off automatically.

INFORMATION

■ AUTO mode can be used when

The power switch is in ON.

■ Daytime running light system

To make your vehicle more visible to other drivers during daytime driving, the daytime running lights turn on automatically whenever the EV system is started and the parking brake is released with the headlight switch in AUTO position. (Illuminate brighter than the front position lights.) Daytime running lights are not designed for use at night.

Headlight control sensor



The sensor may not function properly if an object is placed on the sensor, or anything that blocks the sensor is affixed to the windshield. Doing so interferes with the sensor detecting the level of ambient light and may cause the automatic headlight system to malfunction.

Automatic light off system

- When the headlights are on: The headlights and tail lights turn off 30 seconds after the driver's door is opened and closed if the power switch is turned off. (The lights turn off immediately if on the key is pressed after all the doors are closed.)
- When only the tail lights are on: The tail lights turn off automatically if the power switch is turned off and the driver's door is opened.

  To turn the lights on again, turn the power switch to ON, or turn the light switch off once and then back to or .

Light reminder buzzer

A buzzer sounds when the power switch is turned off or turned to ACC and the driver's door is opened while the lights are turned on.

Windshield wiper linked headlight illumination

When driving during daytime with the headlight switch turned to AUTO, if the windshield wipers are used, the headlights will turn on automatically after several seconds to help enhance the visibility of your vehicle.

12-volt battery-saving function

In order to prevent the 12-volt battery of the vehicle from discharging, if the headlights and/or tail lights are on when the power switch is turned off the 12-volt battery saving function will operate and automatically turn off all the lights after approximately 20 minutes. When the power switch is turned to ON, the 12-volt battery-saving function will be disabled.

When any of the following are performed, the 12-volt battery-saving function is canceled once and then reactivated. All the lights will turn off automatically 20 minutes after the 12-volt battery-saving function has been reactivated:

- When the headlight switch is operated
- When a door is opened or closed

■ **When unlocking the doors (welcome lamp)**

The front position lights automatically turn on when the surroundings are dark and the doors are unlocked using the entry function or wireless remote control if the light switch is in the AUTO position.

■ **Customization**

Some functions can be customized. (→P.682)

Turning on the high beam headlights

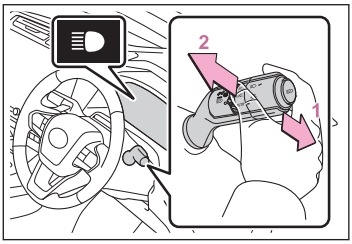

1 With the headlights on, push the lever forward.

The high beam headlights will turn on.

Pull the lever to its original position to turn the high beam headlights off.

2 Pull the lever rearward and release it.

The high beams will flash once.

The high beam headlights can be illuminated this way even with the headlights off.

Operation of the cornering lights*

When any of the following conditions are met, while the headlights (low beam) are on, the cornering lights will turn on and light up the direction of movement of the vehicle. The cornering lights are designed to ensure excellent visibility when turning at intersections or parking at night.

- The steering wheel is being operated
- The turn signal lever is being operated
- The shift position is in R

INFORMATION

■ **Cornering light control**

- When vehicle speed is approximately 35 km/h (22 mph) or higher, the cornering lights will not turn on.
- The lights will automatically turn off if they remain illuminated for 30 minutes.

*: If equipped

Operation of the automatic headlight leveling system

The level of the headlights is automatically adjusted according to the number of passengers and the loading condition of the vehicle to ensure that the headlights do not interfere with other road users.

Automatically changing between the low beam headlights and high beam headlights

AHS (Adaptive High-beam System)*

The Adaptive High-beam System uses a front camera located on the upper portion of the windshield to detect the brightness of the lights of vehicles ahead, streetlights, etc., and automatically controls the light distribution of the headlights.

⚠ WARNING

■ For safe use

Do not overly rely on the Adaptive High-beam System. Always drive safely, taking care to observe your surroundings and turning the high beams on or off manually if necessary.

■ To prevent unintentional operation of the Adaptive High-beam System

When it is necessary to disable the system: →P.338

System controls

- According to the vehicle speed, the brightness and illuminated area of the high beams are adjusted.
- When driving around a curve, the system uses the high beams to brightly illuminate the direction of travel of the vehicle.
- The high beams are illuminated so that the area around a vehicle ahead is shaded. (Shaded high beam)

  The shaded high beam helps ensure forward visibility while reducing the dazzling effect on the drivers of vehicles ahead.

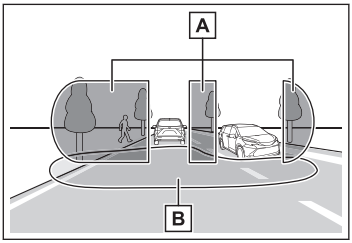

A Area illuminated by the high beams

B Area illuminated by the low beams

- According to the distance to a preceding vehicle, the illuminated area of the low beams is adjusted.

*: If equipped

Using the Adaptive High-beam System

1 Press the Adaptive High-beam System switch.

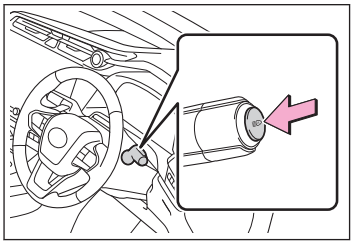

2 Turn the headlight switch to the [AUTO] or position.

When the headlight switch lever is in the low beam position, the AHS will be enabled and the AHS indicator will illuminate.

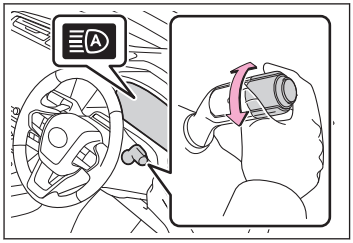

INFORMATION

System operating conditions

- When all of the following conditions are met, the high beams will illuminate and the system will operate:
  - The vehicle speed is approximately 15 km/h (9 mph) or more.*1
  - The area ahead of the vehicle is dark.
- When all of the following conditions are met, the headlights will change to the shaded high beams according to the position of vehicles ahead:
  - The vehicle speed is approximately 15 km/h (9 mph) or more.
  - The area ahead of the vehicle is dark.
  - There is a vehicle ahead with lights on.
  - There are few streetlights or other lights on the road ahead.
- If any of the following conditions are met, the system will change to the low beams:
  - The vehicle speed is approximately 12 km/h (7.5 mph) or lower.
  - The area ahead of the vehicle is not dark.
  - There are many vehicles ahead.
  - There are many streetlights or other lights on the road ahead.

*1: When driving around a curve at a vehicle speed of approximately 30 km/h (19 mph) or more, the direction of travel of the vehicle will be brightly illuminated.

Front camera detection

- In the following situations, the high beams may not be automatically changed to the shaded high beams:
  - When a vehicle cuts in front of your vehicle
  - When another vehicle crosses in front of the vehicle
  - When vehicles ahead are repeatedly detected and then hidden due to repeated curves, road dividers or roadside trees
  - When a vehicle ahead approaches from a far lane
  - When a vehicle ahead is far away
  - When a vehicle ahead has no lights
  - When the lights of a vehicle ahead are dim
  - When a vehicle ahead is reflecting strong light, such as the headlights of your vehicle
  - Situations in which the sensors may not operate properly: →P.343
- The high beams may change to the shaded high beams if a vehicle ahead that is using fog lights without its headlights turned on is detected.
- House lights, street lights, traffic signals, and illuminated billboards or signs and other reflective objects may cause the high beams to change to the shaded high beams, cause the high beams not to change to the shaded high beams, or change the area that is not illuminated.
- The following may change the speed at which the shaded areas change or the timing at which the headlights change to the low beams:
  - The brightness of lights of vehicles ahead
  - The movement and direction of vehicles ahead
  - The distance between the vehicle and a vehicle ahead
  - When a vehicle ahead only has lights illuminated on one side
  - When a vehicle ahead is a two-wheeled vehicle
  - The condition of the road (gradient, curve, condition of the road surface, etc.)
  - The number of passengers and amount of luggage
- The light distribution control of the headlights may not match the driver's expectations
- Bicycles and other small vehicles may not be detected.
- In the following situations, the system may not be able to correctly detect the brightness of the surroundings. This may cause the low beams to remain on or the high beams to flash or dazzle pedestrians or vehicles ahead. In such a case, it is necessary to manually change between the high beams and low beams.

- When there are lights similar to headlights or tail lights in the surrounding area
- When headlights or tail lights of vehicles ahead are turned off, dirty, changing color, or not aimed properly
- When the headlights are repeatedly changing between the high beams and low beams.
- When use of the high beams is inappropriate or when the high beams may be flashing or dazzling pedestrians or other drivers.
- When the vehicle is used in an area in which vehicles travel on the opposite side of the road of the country for which the vehicle was designed, for example using a vehicle designed for right-hand traffic in a left-hand traffic area, or vice versa
- When it is necessary to disable the system: →P.338
- Situations in which the sensors may not operate properly: →P.343

Customization

The settings of some functions can be changed. →P.682

Turning the high beams on/off manually

Changing to the high beams

● **Push the lever forward.**

The AHS indicator will turn off and the high beam indicator will turn on.

Pull the lever to its original position to enable the Adaptive High-beam System again.

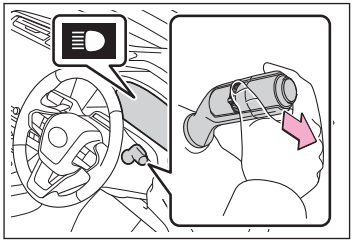

Changing to the low beams

● **Press the Adaptive High-beam System switch.**

The AHS indicator will turn off.

Press the switch to enable the Adaptive High-beam System again.

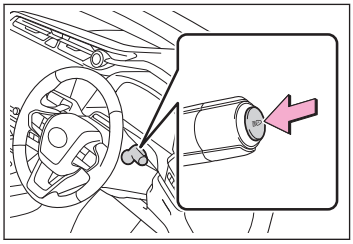

Temporarily changing to the low beams

It is recommended to switch to the low beams when use of the high beams is inappropriate or when the high beams may cause problems or distress to other drivers or pedestrians nearby.

- **Pull the lever rearward and then return it to its original position.**

  The high beams will illuminate while the lever is pulled, however, after the lever is returned to its original position, the low beams will remain on for a certain amount of time. After this, the Adaptive High-beam System will operate.

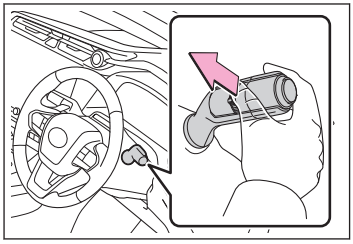

AHB (Automatic High Beam)

The Automatic High Beam uses a front camera located on the upper portion of the windshield to detect the brightness of the lights of vehicles ahead, streetlights, etc., and automatically changes the head lights between the high beams and low beams.

⚠ WARNING

■ For safe use

Do not overly rely on the Automatic High Beam. Always drive safely, taking care to observe your surroundings and turning the high beams on or off manually if necessary.

■ To prevent unintentional operation of the Automatic High Beam System

When it is necessary to disable the system: →P.338

Using the Automatic High Beam system

1 Press the Automatic High Beam switch.

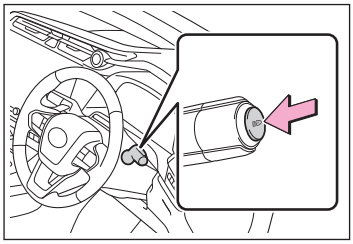

2 **Turn the headlight switch to the [AUTO] or position.**

When the headlight switch lever is in the low beam position, the AHB system will be enabled and the AHB indicator will illuminate.

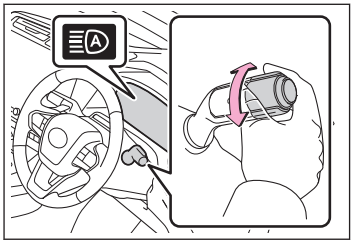

INFORMATION

Automatic operating conditions of the high beams

- When all of the following conditions are met, the high beams will illuminate automatically:
  - The vehicle speed is approximately 30 km/h (19 mph) or more
  - The area ahead of the vehicle is dark.
  - There are no vehicles ahead with lights on.
  - There are few streetlights or other lights on the road ahead.
- If any of the following conditions are met, the headlights will change to the low beams:
  - Vehicle speed drops below approximately 25 km/h (16 mph).
  - The area ahead of the vehicle is not dark.
  - There is a vehicle ahead with lights on.
  - There are many streetlights or other lights on the road ahead.

Front camera detection

- In the following situations, the high beams may not be automatically changed to the low beams:
  - When a vehicle cuts in front of your vehicle
  - When another vehicle crosses in front of the vehicle
  - When vehicles ahead are repeatedly detected and then hidden due to repeated curves, road dividers or roadside trees
  - When a vehicle ahead approaches from a far lane
  - When a vehicle ahead is far away
  - When a vehicle ahead has no lights
  - When the lights of a vehicle ahead are dim
  - When a vehicle ahead is reflecting strong light, such as own headlights
  - Situations in which the sensors may not operate properly: →P.343

- The headlights may change to the low beams if a vehicle ahead that is using fog lights without its headlights turned on is detected.
- House lights, street lights, traffic signals, and illuminated billboards or signs may cause the high beams to change to the low beams, or the low beams to remain on.
- The following may change the timing at which the headlights change to the low beams:
  - The brightness of lights of vehicles ahead
  - The movement and direction of vehicles ahead
  - The distance between the vehicle and a vehicle ahead
  - When a vehicle ahead only has lights illuminated on one side
  - When a vehicle ahead is a two-wheeled vehicle
  - The condition of the road (gradient, curve, condition of the road surface, etc.)
  - The number of passengers and amount of luggage
- The headlights may change between the high beams and low beams unexpectedly.
- Bicycles and other small vehicles may not be detected.
- In the following situations, the system may not be able to correctly detect the brightness of the surroundings. This may cause the low beams to remain on or the high beams to flash or dazzle pedestrians or vehicles ahead. In such a case, it is necessary to manually change between the high beams and low beams.
  - When there are lights similar to headlights or tail lights in the surrounding area
  - When headlights or tail lights of vehicles ahead are turned off, dirty, changing color, or not aimed properly
  - When the headlights are repeatedly changing between the high beams and low beams.
  - When use of the high beams is inappropriate or when the high beams may be flashing or dazzling pedestrians or other drivers.
  - When the vehicle is used in an area in which vehicles travel on the opposite side of the road of the country for which the vehicle was designed, for example using a vehicle designed for right-hand traffic in a left-hand traffic area, or vice versa
  - When it is necessary to disable the system: →P.338
  - Situations in which the sensors may not operate properly: →P.343

Turning the high beams on/off manually

Changing to the high beams

● **Push the lever forward.**

The AHB indicator will turn off and the high beam indicator will turn on.

Pull the lever to its original position to enable the Automatic High Beam system again.

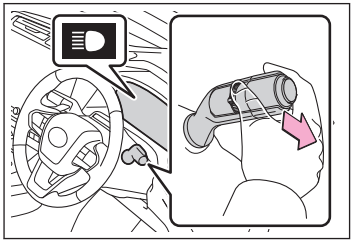

Changing to the low beams

● **Press the Automatic High Beam switch.**

The AHB indicator will turn off.

Press the switch to enable the Automatic High Beam system again.

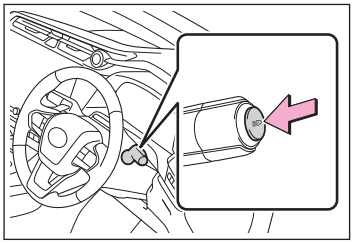

Temporarily changing to the low beams

It is recommended to switch to the low beams when use of the high beams is inappropriate or when the high beams may cause problems or distress to other drivers or pedestrians nearby.

● **Pull the lever rearward and then return it to its original position.**

The high beams will illuminate while the lever is pulled, however, after the lever is returned to its original position, the low beams will remain on for a certain amount of time. After this, the Automatic High Beam system will operate.

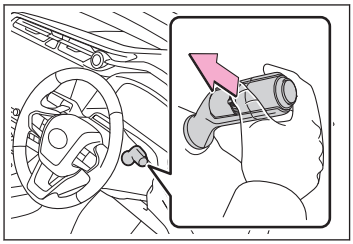

Using the sun visors

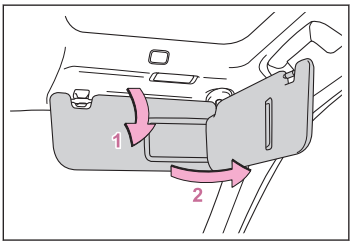

1 To set the visor in the forward position, flip it down.
2 To set the visor in the side position, flip down, unhook, and swing it to the side.

Inside rear view mirror anti-glare function (vehicles with auto anti-glare inside rear view mirror)

Responding to the level of brightness of the headlights of vehicles behind, the reflected light is automatically reduced.

This function turns on each time the power switch is turned to ON.

INFORMATION

To prevent sensor malfunction



Do not touch or cover the sensors. Doing so may cause the sensor to malfunction.

Digital Rearview Mirror* anti-glare function (optical mirror mode)

The automatic anti-glare function in the optical mirror mode can be enabled/disabled.

The automatic anti-glare function is enabled each time the power switch is changed to ON.

1 **Press the menu button.**

The icons will be displayed.

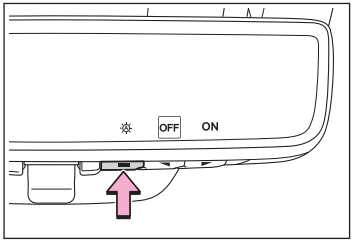

2 **Press or to enable (ON)/disable (OFF) the automatic anti-glare function.**

The icons will disappear if a button is not operated for approximately 5 seconds or more.

*: If equipped

Precautions for driving in the rain

Observe the following precautions when driving in the rain.

- Drive carefully when it is raining, because visibility will be reduced, the windows may become fogged-up, and the road will be slippery.
- Drive carefully when it starts to rain, because the road surface will be especially slippery.
- Refrain from high speeds when driving on an expressway in the rain, as there is a risk of a layer of water forming between the tires and the road surface, preventing the steering and brakes from operating properly.

Ensuring visibility in the rain

Operate the wiper lever to change the operation of wipers between manual and automatic operation or to operate the washers.

Using the front wipers

⚠ WARNING

Take care that your fingers, etc. do not become caught in the windshield wipers.

The windshield wipers may operate unexpectedly in AUTO mode if the sensor is touched or the windshield is subject to vibration.

⚠ NOTICE

Observe the following precautions when using the front wipers.

- Do not leave the front wipers on longer than necessary with the EV system off. Doing so may lead to discharge of the 12-volt battery.
- Do not use the front wipers when the windshield is dry, as they may damage the windshield.

Operating the lever operates the wipers or washer as follows.

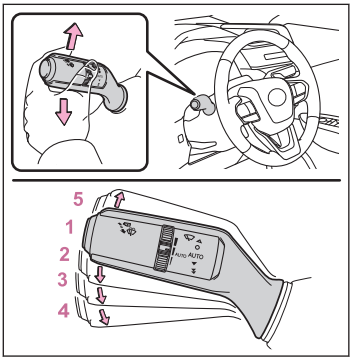

1 ○ Off

2 AUTO Rain-sensing operation

The wipers operate automatically if the sensor detects rain. The system automatically adjusts the speed of the wipers in accordance with rain volume and vehicle speed.

3 ▼ Low speed operation

4 ▼▼ High speed operation

5 △ Temporary operation

INFORMATION

■ The front window wiper and washer can be operated when

The power switch is in ON.

Using the voice control system*

The front wipers can be operated one sweep using the voice control system.

For details, refer to the "Multimedia Owner's Manual".

Changing the speed of the wipers

When AUTO is selected, the wipers will operate automatically when the sensor detects falling rain. The system automatically adjusts wiper timing in accordance with rain volume and vehicle speed.

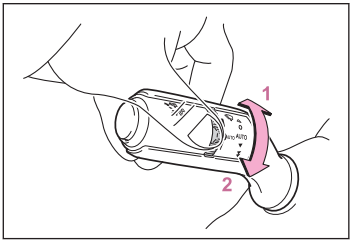

1 Increases the sensitivity
2 Decreases the sensitivity

INFORMATION

Effects of vehicle speed on wiper operation

Vehicle speed affects the intermittent wiper speed.

Raindrop sensor

- The raindrop sensor determines the amount of raindrops that contact the windshield.

  As an optical sensor is used, it may not operate properly when sunlight from the rising or setting of the sun intermittently strikes the windshield, or if bugs, etc. are present on the windshield.



- If the temperature of the raindrop sensor is 90°C (194°F) or higher, or -15°C (5°F) or lower, automatic operation may not occur.

  In this case, operate the wipers in any mode other than AUTO mode.

Using the front washers

⚠ WARNING

When it is cold, do not use the washer fluid until the windshield is warm.

*: If equipped

⚠ WARNING

The fluid may freeze on the windshield, decreasing visibility, possibly leading to an accident.

⚠ NOTICE

If a washer nozzle is blocked, contact your Lexus dealer.

Do not try to clear it with a pin or other object. The nozzle will be damaged.

Pull the lever.

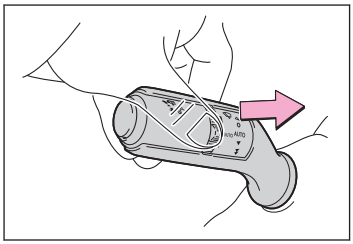

The front wipers and washers will operate.

The front wipers will automatically operate a couple of times after the front washers operate.

Vehicles with headlight cleaners: When the headlights are on and the lever is pulled and held, the headlight cleaners will operate once. After this, the headlight cleaners will operate every 5th time the lever is pulled.

⚠ NOTICE

If washer fluid does not spray, do not operate the switch continuously as doing so may damage the washer fluid pump.

INFORMATION

■ The windshield wipers and washer can be operated when

The power switch is in ON.

■ Drip prevention wiper sweep

After the washers have operated and the wipers operate several times, they will operate one more time after a short delay to prevent drips.

However, this function will not operate while driving.

■ If no windshield washer fluid sprays

If there is washer fluid in the washer fluid tank, check if the washer nozzles are blocked.

■ Using the voice control system*

The front washer can be operated using the voice control system. (Operation is possible only when the vehicle is stopped.)

*: If equipped

For details, refer to the "Multimedia Owner's Manual".

Using the rear camera washer

NOTICE

If a washer nozzle is blocked, contact your Lexus dealer.

Do not try to clear it with a pin or other object. The nozzle will be damaged.

Push the lever.

Clean the camera for Lexus parking assist monitor and Digital Rear-view Mirror*.

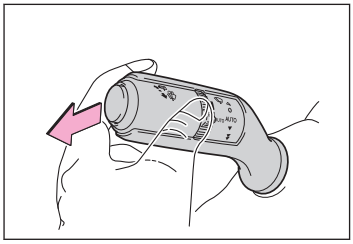

NOTICE

If washer fluid does not spray, do not operate the switch continuously as doing so may damage the rear washer fluid pump.

INFORMATION

■ The rear window wiper and washer can be operated when

The power switch is in ON.

■ If no windshield washer fluid sprays

If there is washer fluid in the washer fluid tank, check if the washer nozzles are blocked.

■ Using the voice control system*

The rear washer can be operated using the voice control system. (Operation is possible only when the vehicle is stopped.)

For details, refer to the "Multimedia Owner's Manual".

*: If equipped

Defog the windshield

Defoggers are used to defog the windshield and front side windows.

⚠ WARNING

- Do not use the windshield defogger in extremely humid areas when the air conditioning system is set to a low temperature.

  The difference between the temperature of the outside air and that of the windshield can cause the outer surface of the windshield to fog up, blocking your vision.

- Do not place anything on the instrument panel which may cover the air outlets.

  Otherwise, air flow may be obstructed, preventing the windshield defoggers from defogging.



Press the windshield defogger switch.

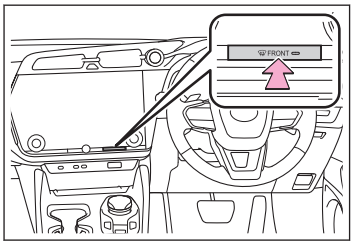

The dehumidification function will operate and the air flow will increase.

Set the outside/recirculated air mode switch to outside air mode if the recirculated air mode is used. (It may switch automatically.)

To defog the windshield and the side windows quickly, turn the air flow and temperature up.

To return to the previous mode, press the windshield defogger switch again when the windshield is defogged.

INFORMATION

Fogging up of the windows

- The windows will easily fog up when the humidity in the vehicle is high.

  Pressing [A/C] button or selecting [A/C] will dehumidify the air from the outlets and defog the windshield effectively.

- If you turn [A/C] off, the windows may fog up more easily.
- The windows may fog up if the recirculated air mode is used.

Defog the rear window

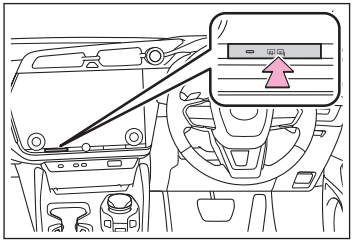

Press the rear windshield and outside rear view mirror defogger switch.

The rear window defogger and outside rear view mirror defoggers will operate and defog the rear window and outside rear view mirrors.

The defoggers will automatically turn off after a period of time.

⚠ WARNING

Do not touch the surface of the outside rear view mirrors when the rear window defogger and outside rear view mirror defoggers are operating, as the surface of the mirrors will become extremely hot and may cause burns.

Defog the outside rear view mirrors

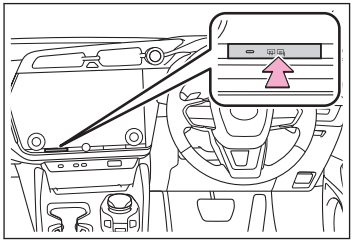

Press the rear windshield and outside rear view mirror defogger switch.

The rear window defogger and outside rear view mirror defoggers will operate and defog the rear window and outside rear view mirrors.

The defoggers will automatically turn off after a period of time.

⚠ WARNING

Do not touch the surface of the outside rear view mirrors when the rear window defogger and outside rear view mirror defoggers are operating, as the surface of the mirrors will become extremely hot and may cause burns.

Preparing for cold weather

Carry out the necessary preparations and inspections before driving the vehicle in cold weather. Always drive the vehicle in a manner appropriate to the prevailing weather conditions.

Necessary inspection items

- Use fluids that are appropriate to the prevailing outside temperatures.
  - Power control unit coolant
  - Heater coolant
  - Washer fluid
- Have a service technician inspect the condition of the 12-volt battery.

Mounting winter tires

Have the vehicle fitted with four winter tires.

Ensure that all tires are the specified size and brand.

⚠ WARNING

Observe the following precautions when winter tires are mounted to the vehicle.

Failure to do so may lead to loss of control of the vehicle.

- Use tires of the specified size.
- Maintain the recommended level of air pressure.
- Do not drive at speeds in excess of the speed limit or the speed limit specified for the winter tires mounted.
- When using winter tires, mount them to all four wheels.

⚠ NOTICE

When having winter tires repaired or replaced, contact your Lexus dealer or a legitimate tire retailer.

This is because the removal and mounting of winter tires affects the operation of the tire pressure warning valves and transmitters.

When using tire chains

Install the tire chains to the front two tires.*1

Make sure to use tire chains which match the tire size.

*1: Tire chains cannot be mounted on 20-inch tires.

INFORMATION

Observe the following precautions when installing, removing, and handling tire chains:

- Install and remove tire chains in a safe location.
- Install tire chains to the front tires only.

  Do not install tire chains to the rear tires.
- Install tire chains following the instructions provided with the tire chains.
- Install tire chains to the front tires as tightly as possible. Retighten the chains after driving 0.5 - 1.0 km (1/4 - 1/2 mile).

⚠ WARNING

Observe the following precautions when tire chains are installed to the vehicle.

Failure to do so may lead to the vehicle not being able to be driven safely.

- Do not drive in excess of the speed limit specified for the tire chains being used, or 50 km/h (30 mph), whichever is lower.
- Avoid driving on bumpy road surfaces or over potholes.
- Avoid sudden acceleration, abrupt steering, sudden braking and shifting operations that cause sudden regenerative braking.
- Slow down sufficiently before entering a curve to ensure that vehicle control is maintained.
- Do not use LTA (Lane Tracing Assist).
- Do not use LDA (Lane Departure Alert).

⚠ NOTICE

■ Fitting tire chains

The tire pressure warning valves and transmitters may not function correctly when tire chains are fitted.

■ Selecting tire chains

Use the correct tire chain size when mounting the tire chains. Chain size is regulated for each tire size.

● Vehicles with 18-inch tires

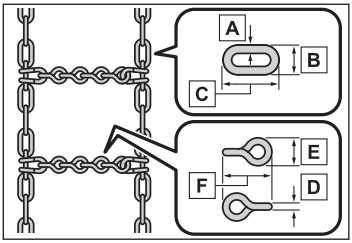

A Side chain (3 mm [0.12 in.] in diameter)
B Side chain (10 mm [0.39 in.] in width)
C Side chain (25 mm [0.98 in.] in length)
D Cross chain (4 mm [0.16 in.] in diameter)
E Cross chain (14 mm [0.55 in.] in width)
F Cross chain (25 mm [0.98 in.] in length)

- Vehicles with 20-inch tires

  Tire chains cannot be mounted on the 20-inch tires.

  Snow tires should be used instead.

Regulations on the use of tire chains

Regulations regarding the use of tire chains vary depending on location and type of road. Always check local regulations before installing chains.

Cold weather driving tips

Things to check before driving in cold weather

Perform the following according to the driving conditions:

- Do not try to forcibly open a window or move a wiper that is frozen. Pour warm water over the frozen area to melt the ice. Wipe away the water immediately to prevent it from freezing.
- To ensure proper operation of the climate control system fan, remove any snow that has accumulated on the air inlet vents in front of the windshield.
- Check for and remove any excess ice or snow that may have accumulated on the exterior lights, outside rear view mirrors, windows, vehicle's roof, chassis, around the tires or on the brakes.
- Remove any snow or mud from the bottom of your shoes before getting in the vehicle.
- When the outside door opener switch becomes stiff, it may be difficult to press on it. Open the door while pressing the door opener switch slightly harder.

Precautions for driving in cold weather

Accelerate the vehicle slowly, keep a safe distance between you and the vehicle ahead, and drive at a reduced speed suitable to road conditions.

Precautions for parking in cold weather

- Turn automatic mode of the parking brake off. Otherwise, the parking brake may freeze and not be able to be released automatically.

  Also, avoid using the following as the parking brake may operate automatically, even if automatic mode is off.

  - Brake hold system
- Park the vehicle and shift the shift position to P without setting the parking brake. The parking brake may freeze up, preventing it from being released. If the vehicle is parked without setting the parking brake, make sure to block the wheels.

  Failure to do so may be dangerous because it may cause the vehicle to move unexpectedly, possibly leading to an accident.
- When the parking brake is in automatic mode, release the parking brake after change the shift position to P.

- If the vehicle is parked without setting the parking brake, confirm that the shift position cannot be moved out of P*1.
- If the vehicle is left parked with the brakes damp in cold temperatures, there is a possibility of the brakes freezing.

INFORMATION

Linked mirror function when reversing

When used in cold weather during reverse driving, the door mirror could be frozen and may not automatically point the mirror surface downward. In this event, remove any ice and snow from the mirror surface.

*1: The shift lever will be locked if it is attempted to be shifted from P to any other position without depressing the brake pedal. If the shift lever can be shifted from P, there may be a problem with the shift lock system. Have the vehicle inspected by your Lexus dealer immediately.

Multi Weather Lights* illumination

The Multi Weather Lights is a system that illuminates the cornering lights to ensure visibility when driving in inclement weather, such as rain or fog.

Using the Multi Weather Lights

1 Turn the headlight switch to the or AUTO position.

2 Turn the switch ring to the position.

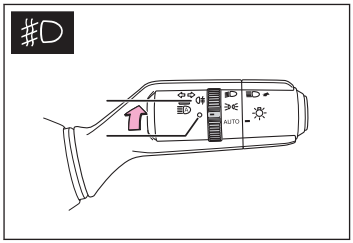

When the switch is released, it returns to .

When the Multi Weather Lights system is enabled, the Multi Weather Lights indicator on the meter will illuminate.

Turn the switch ring to the position again to disable the system.

INFORMATION

Operating conditions

The cornering lights will illuminate when the Multi Weather Lights are enabled and both of the following conditions are met:

- The headlights are on
- The vehicle speed is lower than approximately 45 km/h (28 mph).

  When the vehicle speed increases to approximately 45 km/h (28 mph) or higher, the lights will be temporarily turned off. The lights will turn on again when the vehicle speed becomes lower than approximately 35 km/h (22 mph).

Rear fog lights

When the Multi Weather Lights system is enabled, the rear fog lights may also be illuminated. (→P.225)

Customization

Enabling of the Multi Weather Lights system when the rear fog lights are enabled can be turned on/off. (→P.683)

*: If equipped

Rear fog lights illumination

When driving in inclement weather, such as rain or fog, the rear fog lights can be used to make your vehicle more visible to following vehicles.

Using the rear fog lights

⚠ NOTICE

To prevent 12-volt battery discharge, do not leave the lights on longer than necessary when the EV system is off.

1 **Turn the headlight switch to the or AUTO position.**

2 **Turn the switch ring to the position.**

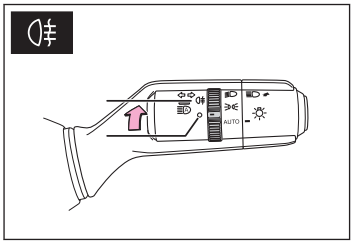

When the switch is released, it returns to .

When the rear fog lights are enabled, the rear fog light indicator on the meter will illuminate.

Turn the switch ring to the position again to disable the rear fog lights.

INFORMATION

■ Illumination conditions

- When enabled, the rear fog lights operate when the headlights are illuminated.
- When illuminated, the rear fog lights will remain on until the tail lights are turned off.

■ Using the rear fog lights

Use the rear fog lights only when necessary. If the rear fog lights are used when visibility is not poor, they may impede the visibility of drivers in following vehicles.

■ Rear fog lights

- When the rear fog lights are on, the rear fog light indicator will illuminate in amber.
- Use the rear fog lights when driving in poor visibility conditions, such as rain or fog, to make your vehicle more visible to following vehicles. If the rear fog lights are used when visibility is not poor, they may impede the visibility of drivers in following vehicles. Use the rear fog lights only when necessary.

■ Multi Weather Lights* system-linked operation

When the rear fog lights are illuminated, the Multi Weather Lights system may also operate. (→P.224)

*: If equipped

Customization

Enabling of the Multi Weather Lights system when the rear fog lights are enabled can be turned on/off. (→P.683)

Sounding the horn

Press on or close to the mark.

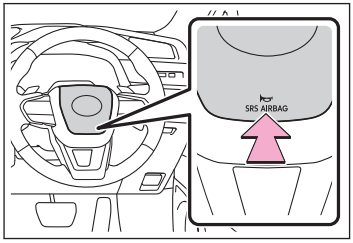

Utility vehicle precautions

This vehicle belongs to the utility vehicle class, which has higher ground clearance and narrower tread in relation to the height of its center of gravity.

Utility vehicle feature

- Specific design characteristics give it a higher center of gravity than ordinary passenger cars. This vehicle design feature causes this type of vehicle to be more likely to rollover. Utility vehicles have a significantly higher rollover rate than other types of vehicles.
- An advantage of the higher ground clearance is a better view of the road allowing you to anticipate problems.
- It is not designed for cornering at the same speeds as ordinary passenger cars any more than low-slung sports cars designed to perform satisfactorily under off-road conditions. Therefore, sharp turns at excessive speeds may cause rollover.

⚠ WARNING

■ Utility vehicle precautions

Always observe the following precautions to minimize the risk of death or serious injury or damage to your vehicle:

- In a rollover crash, an unbelted person is significantly more likely to die than a person wearing a seat belt. Therefore, the driver and all passengers should always fasten their seat belts.
- Avoid sharp turns or abrupt maneuvers, if at all possible. Failure to operate this vehicle correctly may result in loss of control or vehicle rollover causing death or serious injury.
- Vehicles with roof rails: Loading cargo on the roof luggage carrier will make the center of the vehicle gravity higher. Avoid high speeds, sudden starts, sharp turns, sudden braking or abrupt maneuvers, otherwise it may result in loss of control or vehicle rollover due to failure to operate this vehicle correctly.
- Always slow down in gusty crosswinds. Because of its profile and higher center of gravity, your vehicle is more sensitive to side winds than an ordinary passenger car. Slowing down will allow you to have better control.
- Do not drive horizontally across steep slopes. Driving straight up or straight down is preferred. Your vehicle (or any similar off-road vehicle) can tip over sideways much more easily than forward or backward.

Off-road driving

Your vehicle is not designed to be driven off-road. However, in the event that off-road driving cannot be avoided, please observe the following precautions to help avoid the areas prohibited to vehicles.

- Drive your vehicle only in areas where off-road vehicles are permitted to travel.
- Respect private property. Get owner's permission before entering private property.
- Do not enter areas that are closed. Honor gates, barriers and signs that restrict travel.
- Stay on established roads. When conditions are wet, driving techniques should be changed or travel delayed to prevent damage to roads.
- Avoid driving on very steep, slippery roads and other surfaces, such as sand, where the tires are liable to lose traction. Your vehicle may not perform as well as conventional AWD on-road vehicles on these surfaces.

⚠ WARNING

■ Off-road driving precautions

Always observe the following precautions to minimize the risk of death or serious injury or damage to your vehicle:

- Drive carefully when off the road. Do not take unnecessary risks by driving in dangerous places.
- Do not grip the steering wheel spokes when driving off-road. A bad bump could jerk the wheel and injure your hands. Keep both hands and especially your thumbs on the outside of the rim.
- Always check your brakes for effectiveness immediately after driving in sand, mud, water or snow.
- After driving through tall grass, mud, rock, sand, water, etc., check that there is no grass, bush, paper, rags, stone, sand, etc. adhering or trapped to the underbody. Clear off any such matter from the underbody. If the vehicle is used with these materials trapped or adhering to the underbody, a breakdown or fire could occur.
- When driving off-road or in rugged terrain, do not drive at excessive speeds, jump, make sharp turns, strike objects, etc. This may cause loss of control or vehicle rollover causing death or serious injury. You are also risking expensive damage to your vehicle's suspension and chassis.

⚠ NOTICE

To prevent water damage

Take all necessary safety measures to ensure that water damage to the traction battery, EV system or other components does not occur.

- Water entering the motor compartment may cause severe damage to the EV system.
- Water entering the transmission will cause deterioration in transmission quality. The malfunction indicator may come on, and the vehicle may not be drivable.
- Water can wash the grease from wheel bearings, causing rusting and premature failure, and may also enter the transaxle case, reducing the gear oil's lubricating qualities.

When you drive through water

If driving through water, such as when crossing shallow streams, first check the depth of the water and the bottom of the riverbed for firmness. Drive slowly and avoid deep water.

Inspection after off-road driving

- Sand and mud that has accumulated around brake discs may affect braking efficiency and may damage brake system components.
- Always perform a maintenance inspection after each day of off-road driving that has taken you through rough terrain, sand, mud, or water.

Driving modes

The following driving modes can be used according to the driving/usage conditions.

Characteristics of each driving mode

■ Normal mode

Suitable when driving in the city, for good electricity consumption efficiency, silence, and drive-ability.

■ Eco drive mode

In contrast with Normal mode, torque generation is slower when stepping on the accelerator pedal, air conditioning operations (heating/cooling) are restrained, and driving becomes suited for improved electricity consumption.

■ Range mode

When in range mode, the driving controls are changed to those for improved electric consumption, in terms of the vehicle speed limits, the maximum driving force limits, the optimized front-rear allocation of the driving force, etc., along with turning off of the air conditioning system (heating/cooling).

When in range mode and the cruise control or dynamic radar cruise control is operated, the vehicle speed limit is 100 km/h (62 mph), even though a higher speed is set. This mode is suitable for maximizing the driving distance.

■ Sport mode

Helps to ensure steering feel and accelerator response by controlling the EV system and transmission. Suitable for sporty, fun driving, such as when driving on mountain roads.

■ Custom mode

Driving is possible by setting the desired function for power train control, chassis control or air conditioning operations. Custom mode settings can only be changed on the drive mode customization display of the center display. (→P.688)

INFORMATION

■ Operation of the air conditioning system in Eco drive mode

- In the Eco drive mode, the air conditioning system is controlled as follows to prioritize electricity consumption efficiency.
  - Heating/cooling capacity is restricted

- Fan speed restricted when automatic mode is selected

● To improve air conditioning performance, perform the following operations:

- Adjust the fan speed
- Adjust the temperature setting
- Turn off Eco drive mode

● When the driving mode is set to Eco drive mode, the air conditioning system may automatically change to Eco mode. To cancel eco mode, press [**Eco heat/cool**].

■ **Operation of the air conditioning system in range mode**

● In range mode, the air conditioning system will turn off automatically.

● Turning the air conditioning system on manually will operate it in the setting used before range mode was selected.

■ **Suggestion message to change to range mode**

When the remaining charge of the traction battery reaches a certain level, a message suggesting to change drive modes to range mode will be displayed. (→P.323)

Changing the driving mode

1 Select on the center display.
2 Select [Drive mode].
3 Select driving mode.

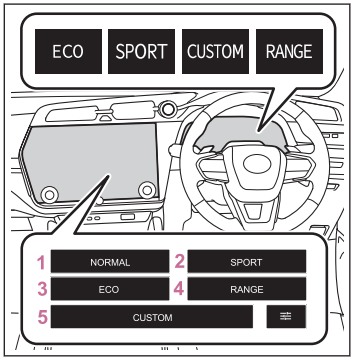

1 Normal mode
2 Sport mode

When the Sport mode is selected, Sport mode indicator will comes on.

3 Eco drive mode

When the Eco drive mode is selected, Eco drive mode indicator comes on.

4 Range mode

When the Range mode is selected, Range mode indicator comes on.

5 Custom mode

When the Custom mode is selected, Custom mode indicator comes on.

To change custom mode settings, select .

INFORMATION

■ Canceling Range/Sport/Custom mode

- Range mode, Sport mode and Custom mode will be canceled automatically when the power switch is turned off.
- Normal mode and Eco drive mode will not be canceled automatically until another driving mode is selected, even if the power switch is turned off.

■ Display of the multi-information display according to selected driving mode

According to the driving mode selected, the gauges displayed on the multi-information display may change.

Brake hold system

⚠ WARNING

■ When the vehicle is on a steep incline

Take care when using the brake hold system on a steep incline, exercise caution. The brake hold function may not hold brakes in such situations. Also, the system may not activate depending on the angle of the slope.

■ When stopped on a slippery road

The system cannot stop the vehicle when the gripping ability of the tires has been exceeded. Do not use the system when stopped on a slippery road.

⚠ NOTICE

■ When parking the vehicle

The brake hold system is not designed for use when parking the vehicle for a long period of time. Turning the power switch off while the system is holding the brake may release the brake, which would cause the vehicle to move. When operating the power switch, depress the brake pedal, shift the shift position to P and set the parking brake.

Turns the brake hold system on

The brake hold system keeps the brake applied when the shift position is in D or N with the system on and the brake pedal has been depressed to stop the vehicle. The system releases the brake when the accelerator pedal is depressed with the shift position in D to allow smooth start off.

Turns the brake hold system on

The brake hold standby indicator (green) comes on. While the system is holding the brake, the brake hold operated indicator (yellow) comes on.

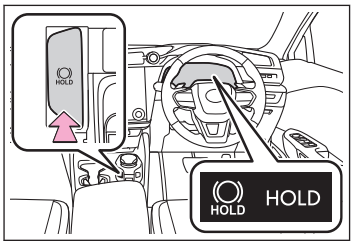

INFORMATION

■ Brake hold system operating conditions

The brake hold system cannot be turned on in the following conditions:

- The driver's door is not closed.
- The driver is not wearing the seat belt.

- The parking brake is engaged.

If any of the conditions above are detected when the brake hold system is enabled, the system will turn off and the brake hold standby indicator light will go off. In addition, if any of the conditions are detected while the system is holding the brake, a warning buzzer will sound and a message will be shown on the multi-information display. The parking brake will then be set automatically.

Brake hold function

- If the brake pedal is left released for a period of about 3 minutes after the system has started holding the brake, the parking brake will be set automatically. In this case, a warning buzzer sounds and a message is shown on the multi-information display.
- To turn the system off while the system is holding the brake, firmly depress the brake pedal and press the button again.
- The brake hold function may not hold the vehicle when the vehicle is on a steep incline. In this situation, it may be necessary for the driver to apply the brakes. A warning buzzer will sound and the multi-information display will inform the driver of this situation. If a warning message is shown on the multi-information display, read the message and follow the instructions.
- When do not wish for the parking brake to operate automatically, press and hold the brake hold switch until the standby indicator (green) turns off, and then turn the power switch off.

When the parking brake is set automatically while the system is holding the brakes

Perform any of the following operations to release the parking brake.

- Depress the accelerator pedal. (The parking brake will not be released automatically if the seat belt is not fastened.)
- Operate the parking brake switch with the brake pedal depressed.

Make sure that the parking brake indicator light goes off. (→P.190)

When an inspection at your Lexus dealer is necessary

When the brake hold standby indicator (green) does not illuminate even when the brake hold switch is pressed with the brake hold system operating conditions met, the system may be malfunctioning.

Have the vehicle checked by your Lexus dealer immediately.

If "Brake Hold Malfunction" is displayed on the multi-information display

The system may be malfunctioning.

Have the vehicle checked by your Lexus dealer immediately.

Warning messages and buzzers

Warning messages and buzzers are used to indicate a system malfunction or to inform the driver of the need for caution. If a warning message is shown on the multi-information display, read the message and follow the instructions.

If the brake hold operated indicator flashes

→P.576

4 Interior features

4-1. Favorite settings

My Settings 238

4-2. Adjusting the preferred driving position

Enabling easier driver entry and exit (Power easy access system) 240

Driving position registration/recall/deletion 241

4-3. Adjusting the temperature/environment inside the vehicle

Comfortable condition to be maintained without adjusting each system (Lexus Climate Concierge) 246

Air conditioning controls 248

Heated steering wheel 258

Seat heaters/Radiant heaters 259

Seat ventilators 262

Using the panoramic fixed moon roof with one-touch frosted glass control 263

4-4. Illuminating the interior

Using the interior lights 269

4-5. Using the interior features

Location of the storage features 273

Convenient interior features ... 278

4-6. Using the luggage compartment

Using the cargo hooks 290

Using the cargo net hooks 291

Using the grocery bag hooks .. 292

Deck board 293

Stowing the luggage cover 295

My Settings

By identifying an individual through a device, such as an electronic key, the driving position and vehicle settings recorded for that driver can be recalled when the vehicle is entered. By assigning an authentication device to a driver in advance, the driver can enter the vehicle with their preferred settings. Settings for up to 3 drivers can be recorded by My Settings. For details on how to assign/delete electronic keys, set driver names, perform initialization, change drivers manually, or delete a driver, refer to the "Multimedia Owner's Manual".

Types of assigned authentication devices

An individual can be identified using the following authentication devices:

- Electronic key

  An individual is identified when the smart entry & start system detects their electronic key. (→P.94)

- Face authentication system

  An individual is identified at the opening/closing of the door when face information registered using the driver monitor camera is identified. (→P.348)

  Individual identification by face authentication is prioritized than by electronic key, if the latter has identified with another registered driver.

- Bluetooth® devices

  An individual can be identified if the same Bluetooth® device that was used as a hands-free phone the last time the vehicle was entered is connected to the audio system.

  If an individual is identified by detecting an electronic key, identification by Bluetooth® device will not be performed.

Recalled functions

When an individual is identified from an authentication device, settings for the following functions are recalled:

- Driving position (memory recall function)*

  After an individual is identified, the driving position that was set when driving was last completed (with shift position set to P) is recalled when the following operation is performed.

  - When an individual is identified from an electronic key: Unlocking the driver's doors using the smart entry & start system or wireless remote control

*: If equipped

- When an individual is identified from the face authentication system: After the driver monitor identifies face information, turning the power switch to ACC or ON.

● Meter displays*1, head-up display**1, and center display*1

When an individual is identified, the vehicle settings used when the power switch was last turned off are recalled.

● Safe driving support function*1

When an individual is identified, the vehicle settings used when the power switch was last turned off are recalled.

● Vehicle settings available on the center display*1

When an individual is identified, the vehicle settings used when the power switch was last turned off are recalled.

*1: Some settings are excluded

*: If equipped

Enabling easier driver entry and exit (Power easy access system)*

⚠ WARNING

Never use any part of your body to intentionally activate the jam protection function.

When all of the following have been performed, the driver's seat and steering wheel are automatically adjusted to a position that allows driver to enter and exit the vehicle easily.

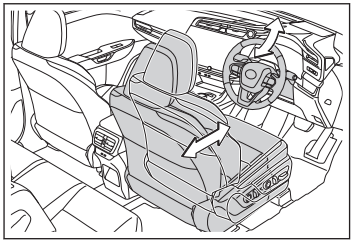

- The shift position has been shifted to P.
- The power switch has been turned off.
- The driver's seat belt has been unfastened.

When any of the following has been performed, the driver's seat and steering wheel automatically return to their original positions.

- The power switch has been turned to ACC or ON.
- The driver's seat belt has been fastened.

INFORMATION

Operation of the power easy access system

When exiting the vehicle, the power easy access system may not operate if the seat is already close to the rearmost position, etc.

Jam protection function

While the power easy access system is operating, if an object is stuck behind the front seat, the front seat will stop and then slightly move forward. When the jam protection function operates, the seat stops at a position other than the set seat position. Check the seat position.

*: If equipped

Driving position registration/recall/deletion*

This feature automatically adjusts the positions of the driver's seat, steering wheel, outside rear view mirrors and head-up display* to make entering and exiting the vehicle easier or to suit your preferences. Driving positions can be recorded for 3 drivers that has been registered for My Settings. When electronic key (including a card key) assignment is registered for My Settings, the driving position for each driver can be recalled (memory recall function).

Registering a driving position into memory (position memory function)

1 Check that the shift position is in P.

2 Turn the power switch to ON.

3 Adjust the driver's seat, steering wheel, outside rear view mirrors and head-up display* to the desired positions.

4 While pressing the [SET] button, or within 3 seconds after the [SET] button is pressed, press button [1], [2] or [3] until the buzzer sounds.

If a driving position has already been registered to the selected button, the previously registered position will be overwritten.

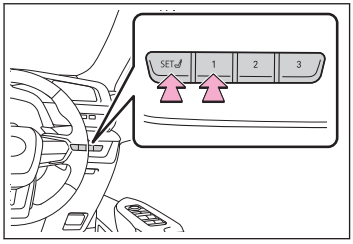

INFORMATION

■ Seat positions that can be memorized

The adjusted positions other than the position adjusted by lumbar support switch can be recorded.

■ In order to correctly use the driving position memory function

If a seat position is already in the furthest possible position and the seat is operated in the same direction, the registered position may be slightly different when it is recalled.

⚠ WARNING

Take care during seat adjustment so that the seat does not contact a rear passenger or squeeze your body against the steering wheel.

*: If equipped

Recalling a driving position (position memory function)

⚠ WARNING

Never use any part of your body to intentionally activate the jam protection function.

1 Check that the shift position is in P.

2 Turn the power switch to ON.

3 Press one of the buttons for the driving position you want to recall until the buzzer sounds.

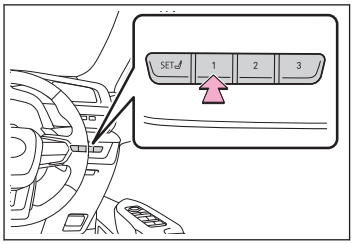

INFORMATION

■ To stop the position recall operation part-way through

Perform any of the following:

- Press the [SET] button.
- Press button [1], [2] or [3].
- Operate any of the seat adjustment switches (only cancels seat position recall).
- Operate the tilt and telescopic steering control switch (only cancels steering wheel position recall).

■ Operating the driving position memory after turning the power switch off

Registered seat positions can be recalled up to 180 seconds after the driver's door is opened and another 61 seconds after it is closed again.

■ When the recorded seat position cannot be recalled

The seat position may not be recalled in some situations when the seat position is recorded in a certain range.

For details, contact your Lexus dealer.

■ Jam protection function

While the driving position is recalled or the power easy access system is operating, if an object is stuck behind the front seat, the front seat will stop and then slightly move forward. When the jam protection function operates, the seat stops at a position other than the set seat position. Check the seat position.

Recalling a driving position

Take care so that a head restraint does not contact the ceiling or a sun visor.

Using the voice control system*

The following operations can be performed using the voice control system:

- Driving position registration
- Driving position recall (only when the shift position is in P)

For details, refer to the "Multimedia Owner's Manual".

Registering/canceling/recall a driving position to an electronic key (memory recall function) (driver's side only)

INFORMATION

Recalling the driving position using the memory recall function

- The timing of operation may differ depending on the device used to identify an individual.
- As a driving position can be registered to each electronic key, if 2 or more keys are carried, the recall driving position may different.

Jam protection function

While the driving position is recalled or the power easy access system is operating, if an object is stuck behind the front seat, the front seat will stop and then slightly move forward. When the jam protection function operates, the seat stops at a position other than the set seat position. Check the seat position.

Customization

Some functions can be customized. (→P.681)

Identifying a driver with face information assigned and registered in My Settings

The driving positions can be automatically recalled for each registered driver by registering face information in the face authentication system and registering the face information assignment in My Settings.

Driving position registration procedure

When the shift position is shifted to P after driving the vehicle, the current driving position will be recorded.

*: If equipped

■ Driving position recall procedure

Turn the power switch to ACC or ON.

After face authentication is performed successfully, the seat, steering wheel, and head-up display will move to the registered driving position (only when the power switch is turned on). They will not move if already in the registered driving position.

If the driving position is in a position that has already been recorded, the driving position will not move.

■ Memory recall function cancelation procedure

Delete face information from the face authentication system.

For information on deleting fingerprint information, refer to the "Multimedia Owner's Manual".

Vehicles without a My Settings function

Each electronic key can be registered to automatically recall your preferred driving position.

■ Driving position registration procedure

Record your driving position to button [1], [2] or [3] before performing the following:

Carry only the key you want to register, and then close the driver's door.

If 2 or more keys are in the vehicle, the driving position cannot be recorded properly.

1. Check that the shift position is in P.
2. Turn the power switch to ON.
3. Recall the driving position that you want to record.
4. While pressing the recalled button, press and hold the door lock switch (either lock or unlock) until the buzzer sounds.

   If the button could not be registered, the buzzer sounds continuously for approximately 3 seconds.

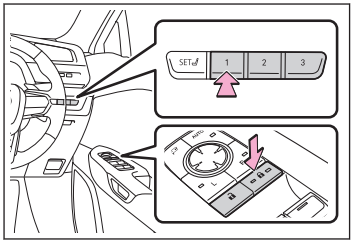

Driving position recall procedure

1. Make sure that the doors are locked before recalling the driving position. Carry the electronic key that has been registered to the driving position, and then unlock and open the driver's door using the smart entry & start system or wireless remote control.

   The driving position will move to the recorded position (not including the steering wheel and head-up display*). However, the seat will move to a position slightly behind the recorded position in order to make entering the vehicle easier.

   If the driving position is in a position that has already been recorded, the seat and outside rear view mirrors will not move.

2. Turn the power switch to ACC or ON, or fasten a seat belt.

   The seat, steering wheel and head-up display* will move to the recorded position.

Memory recall function cancelation procedure

Carry only the key you want to cancel and then close the driver's door.

If 2 or more keys are in the vehicle, the driving position cannot be canceled properly.

1. Check that the shift position is in P.
2. Turn the power switch to ON.
3. While pressing the [SET] button, press and hold the door lock switch (either lock or unlock) until the buzzer sounds twice.

   If it button could not be canceled, the buzzer sounds continuously for approximately 3 seconds.

*: If equipped

Comfortable condition to be maintained without adjusting each system (Lexus Climate Concierge)

Operation of the seat heaters and seat ventilators of the front seats and the heated steering wheel* is performed automatically according to the temperature setting of the air conditioning system, outside temperature, temperature inside the vehicle, etc.

Lexus Climate Concierge

Lexus Climate Concierge operates in conjunction with AUTO of the air conditioning system.

1 Select the option screen switch.→P.249

2 Select the [Climate concierge] switch.

3 Turn the [AUTO] switch on.

Automatically controllable functions

- Automatic air conditioning system→P.248

  Operation of the air conditioning system is performed automatically according to the temperature setting for the driver's side/front passenger's side.

- Seat heaters→P.259

  Operation of the seat heaters is performed automatically according to the temperature setting for the driver's side/front passenger's side.

  Operation will automatically change between the seat heaters and seat ventilators according to the temperature setting of the air conditioning system, outside temperature, etc.

- Seat ventilators→P.262

  Operation of the seat ventilators is performed automatically according to the temperature setting for the driver's side/front passenger's side.

  Operation will automatically change between the seat heaters and seat ventilators according to the temperature setting of the air conditioning system, outside temperature, etc.

- Heated steering wheel→P.258

  Operation of the heated steering wheel is performed automatically according to the temperature setting of the air conditioning system, outside temperature, etc.

*: If equipped

INFORMATION

Passenger detection functions

- When a passenger is detected in the front passenger seat, the seat heater and ventilator will operate automatically.
- When the seat heater/seat ventilator switch is set to AUTO, the passenger detection function will not operate.

Rear seat heater operation*

The rear seat heaters are not controlled by the Lexus Climate Concierge.

*: If equipped

Air conditioning controls

When the [AUTO] switch is on, the air outlets and fan speed will automatically be changed according to the set temperature.

NOTICE

To prevent 12-volt battery discharge

Do not leave the air conditioning system on longer than necessary when the EV system is off.

Humidity sensor

- In order to detect fog on the windshield, a sensor which monitors the temperature of the windshield, the surround humidity, etc., is installed.



- Follow these points to avoid damaging the sensor:
  - Do not disassemble the sensor
  - Do not spray the glass cleaner on the sensor or subject it to strong impacts
  - Do not stick anything on the sensor

INFORMATION

When the outside temperature exceeds 24°C (75°F) and the air conditioning system is on

- In order to reduce the air conditioning power consumption, the air conditioning system may switch to recirculated air mode automatically.
- Recirculated air mode is selected as a default mode when the power switch is turned to ON.
- It is possible to switch to outside air mode at any time by pressing the outside/recirculated air mode switch.

When driving on dusty roads

Close all windows. If dust thrown up by the vehicle is still drawn into the vehicle after closing the windows, it is recommended that the air intake mode be set to outside air mode and the fan speed to any setting except off.

When the outside temperature is low

The dehumidification function may not operate even when [A/C] is selected.

Ventilation and air conditioning odors

- To let fresh air in, set the air conditioning system to the outside air mode.
- During use, various odors from inside and outside the vehicle may enter into and accumulate in the air conditioning system. This may then cause odor to be emitted from the vents.
- To reduce potential odors from occurring:
  - It is recommended that the air conditioning system be set to outside air mode prior to turning the vehicle off.
  - The start timing of the blower may be delayed for a short period of time immediately after the air conditioning system is started in automatic mode.
- When parking, the system automatically switches to outside air mode to encourage better air circulation throughout the vehicle, helping to reduce odors that occur when starting the vehicle.

Using the voice control system*

Air conditioning system can be operated using voice controls. For details, refer to the "Multimedia Owner's Manual".

Customization

Functions that are linked to automatic mode (when the [AUTO] switch is on) can be set through [**Vehicle customise**] on the center display. (→P.688)

Option screen switch

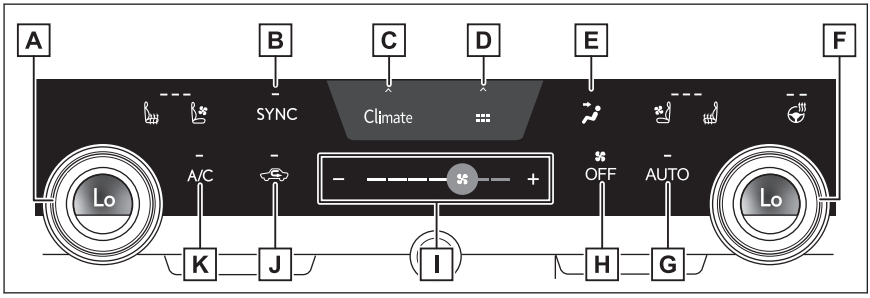

A Left-hand side temperature control switch

B [SYNC] switch

C Option screen switch

*: If equipped

D Shortcut screen switch

Select to display shortcut icons for various functions.

E Airflow mode control switch

F Right-hand side temperature control switch

G [AUTO] switch

H [OFF] switch

I Fan speed control switch

J Outside/recirculated air mode switch

K [A/C] switch

Adjusting the temperature

Turn temperature control dial clockwise to increases the temperature and turn the dial counterclockwise to decreases the temperature.

When the indicator on the [SYNC] switch is illuminated, the temperature setting for the front passenger's side will match the setting for the driver's side.

When the indicator on the [SYNC] switch is off, turning the [SYNC] switch on will illuminate the [SYNC] switch indicator and the temperature setting for the front passenger's side will become the same as that for the driver's side.

When the front passenger's side temperature adjustment switch is operated, the indicator on the [SYNC] switch will turn off and the temperature setting for the front passenger's side will be able to be adjusted.

When the indicator on the [A/C] switch is off, the blower and heater can be used.

Setting the fan speed

To increase the fan speed, select the [+] fan speed adjustment switch or slide the icon of the fan speed adjustment switch right. To decrease the fan speed, select the [-] fan speed adjustment switch or slide the icon of the fan speed adjustment switch left.

Select the [OFF] switch to turn the fan off.

The fan can also be stopped by touching and holding the [-] fan speed adjustment switch or sliding the icon of the fan speed adjustment switch to the leftmost position and holding it.

Changing the air flow mode

Select the airflow mode control switch.

The airflow mode changes each time the switch is selected.

The air outlets and air volume changes according to the selected air flow mode.


: Air flows to the upper body


: Air flows to the upper body and feet


: Air flows to the feet


: Air flows to the feet and the windshield defogger operates

INFORMATION

Location of air outlets



Switching between outside air and recirculated air modes

Temporarily changing the air mode to recirculated air mode is recommended to prevent dirty air from entering the vehicle, such as when in a tunnel or heavy traffic, and to help cool the interior when the outside air temperature is high.

Select the outside/recirculated air mode switch.

The air mode changes between outside air mode and recirculated air mode each time the switch is selected. When recirculated air mode is selected, the indicator will illuminate.

The air mode may change automatically depending on the temperature setting, temperature inside the vehicle, etc.

Front seat concentrated airflow mode (S-Flow)

This function automatically controls the airflow of the air conditioning system to prioritize airflow to the front seats. Unnecessary air conditioning is suppressed, contributing to increased electricity consumption efficiency.

Front seat concentrated airflow mode operates in the following situations.

- No passengers are detected in the rear seats
- The windshield defogger is not operating

The S-Flow switch is  (ON) on the option screen.

In front seat concentrated airflow mode, directing airflow to the front seats only and to all seats can be switched via switch operation. When the mode has been switched manually, automatic airflow control stops operating.

1 Select the option screen switch. (→P.249)

2 Select the [S-Flow] switch.

- Indicator illuminated: Airflow to the front seats only
- Indicator off: Airflow to all the seats

INFORMATION

Operation of automatic airflow control

- In order to maintain a comfortable interior, airflow may be directed to seats without passengers immediately after the EV system is started and at other times depending on the outside temperature.
- After the EV system is started, if passengers move around inside or enter/exit the vehicle, the system cannot accurately detect the presence of passengers and automatic airflow control will not operate.

Operation of manual airflow control

Even if the function is manually switched to directing airflow to only the front seats, when a rear seat is occupied, it may automatically direct airflow to all seats.

To return to automatic airflow control

1. With the indicator off, turn the power switch off.
2. After 60 minutes or more elapse, turn the power switch to ON.

Eco air conditioning mode

The air conditioning is controlled with low electricity consumption prioritized such as reducing fan speed, etc.

1 Select the option screen switch. (→P.249)

2 Select the [Eco heat/cool] switch.

- In Eco drive mode, the air conditioning system is controlled as follows to prioritize electricity efficiency. To improve air conditioning performance, turn off Eco air conditioning mode.

- EV system output controlled to restrict heating/cooling capacity.
- Fan speed restricted when automatic mode is selected.

● When the driving mode is set to Eco driving mode, the Eco air conditioning mode will be turned on automatically. Even in this case, the Eco air conditioning mode can be turned off by selecting the [**Eco heat/cool**].

● When the driving mode is set to range mode, the air conditioning system will turn off automatically. Turning the air conditioning system on manually will operate it in the setting used before range mode was selected.

Warming the interior quickly (Max heat)

When [**MAX heat**] is turned on, in order to warm the interior quickly, the settings of the air conditioning system will be changed immediately.

1 **Touch the shortcut screen switch on the center display. (→P.249)**

2 **Select the [MAX heat] switch.**

● The temperature setting of the air conditioning system will be set to [**Hi**] and the [**AUTO**] switch will be turned on.

● Seat heaters will be set to Hi. (vehicles with seat heaters)

● Heated steering wheel will be set to Hi. (vehicles with heated steering wheel)

● In the following situations, the front passenger's side seat heater/seat ventilator will be set to [**AUTO**].

- When [**Climate concierge**] is on
- When the system determines that a passenger is in the front passenger seat

● When the indicator on the [**SYNC**] switch is illuminated, the temperature setting for the front passenger's side seat will also be set to [**Hi**].

INFORMATION

[MAX heat]

● The [**MAX heat**]switch cannot be used to turn the setting off.

● After the [**MAX heat**] switch has been operated, the temperature setting can be adjusted using the temperature control switches of the air conditioning system.

● When [**Climate concierge**] is on, if the [**AUTO**] switch is turned on, the seat heaters* and seat ventilators of the front seats*, and the heated steering wheel* will be operated automatically according to the temperature setting.

● Each function can also be adjusted to the desired setting.

*: If equipped

Cooling the interior quickly (Max cool)

When [MAX cool] is turned on, in order to cool the interior quickly, the settings of the air conditioning system will be changed immediately.

1 Touch the shortcut screen switch on the center display. (→P.249)

2 Select the [MAX cool] switch.

- The temperature setting of the air conditioning system will be set to [Lo] and the [AUTO] switch will be turned on.
- Seat ventilators will be set to Hi.
- In the following situation, the heated steering wheel will be set to [AUTO]. (vehicles with heated steering wheel)
  - When [Climate concierge] is on
- In the following situations, the front passenger's side seat heater/seat ventilator will be set to [AUTO]. (vehicles with seat heaters)
  - When [Climate concierge] is on
  - When the system determines that a passenger is in the front passenger seat
- When the indicator on the [SYNC] switch is illuminated, the temperature setting for the front passenger's side seat will also be set to [Lo]

INFORMATION

[MAX cool]

- The [MAX cool] switch cannot be used to turn the setting off.
- After the [MAX cool] switch has been operated, the temperature setting can be adjusted using the temperature control switches of the air conditioning system.
- When [Climate concierge] is on, if the [AUTO] switch is turned on, the seat heaters* and seat ventilators of the front seats*, and the heated steering wheel* will be operated automatically according to the temperature setting.
- Each function can also be adjusted to the desired setting.

nanoe™ X generator*1*2

1 Select the option screen switch. (→P.249)

*: If equipped

*1: nanoe™ and the nanoe™ X marks are trademarks of Panasonic Holdings Corporation.

*2: nanoe™ X particles are nano-sized electrostatic atomised water particles that contain hydroxyl radicals, which have beneficial effects.

2 Select the nanoe™X switch.

A nanoe™ X generator is installed in this air conditioning system. This provides clean and refreshing air through the window side air outlet of the driver's side vent by emitting nanoe™ X particles.*1

- When nanoe™ X is turned on, the nanoe™ X generator is automatically activated when the fan is turned on.
- The effects of nanoe™ X are maximized in the following conditions:
  - The upper body, upper body and feet, and feet vents are being used.
  - The center air outlet of the driver's seat is open.
- When nanoe™ X particles are generated, a small amount of ozone is emitted so a faint odour may be detectable. This is approximately the same as the amount that already exists in nature, such as in forests, and it has no effect on the human body.
- A slight noise may be detectable during operation. It may take some time for operation to begin. A more noticeable noise may be detectable immediately upon the start of operation. This is not a malfunction.

⚠ WARNING

■ nanoe™ X generator

Do not disassemble or attempt to repair the nanoe™ X generator because it contains high voltage parts. Contact your Lexus dealer if the generator needs repair.

⚠ NOTICE

■ To prevent damage to the nanoe™ X generator

Do not insert anything into the driver's side vent, attach anything to it, or use sprays around it. These actions could cause the generator to malfunction.

Air outlet layout and operations

■ Adjusting the position of and opening and closing the air outlets

To adjust the position of and opening and closing the air outlets, perform the following operations:

*1: According to temperature and humidity conditions, fan speed and direction of the air flow, the nanoe™ X generator may not operate at full capacity.

▶ Front center

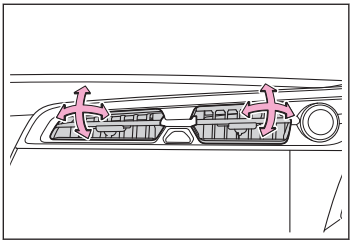

Direct air flow to the left or right, up or down

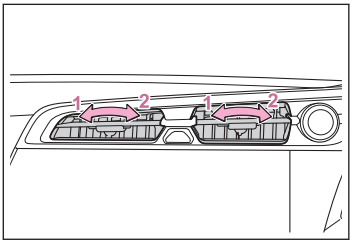

Turn the knob to open or close the vent

1 Close the outlet

2 Open the outlet

▶ Front side

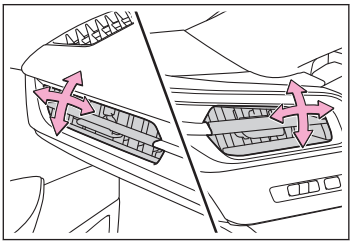

Direct air flow to the left or right, up or down

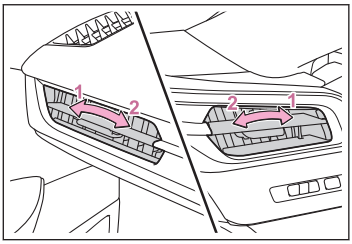

Turn the knob to open or close the vent

1 Close the outlet

2 Open the outlet

▶ Rear

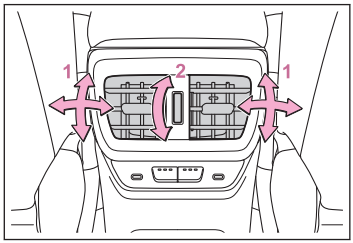

1 Direct air flow to the left or right, up or down
2 Turn the knob to open or close the vent

Heated steering wheel*

Warm up the grip of the steering wheel.

⚠ WARNING

Care should be taken if anyone in the following categories comes in contact with the steering wheel when the heater is on:

- Babies, small children, the elderly, the sick and the physically challenged
- Persons with sensitive skin
- Persons who are fatigued
- Persons who have taken alcohol or drugs that induce sleep (sleeping drugs, cold remedies, etc.)

⚠ NOTICE

Do not use the functions when the EV system is off.

INFORMATION

■ Operating conditions

When the power switch is ON.

Turn the steering heater ON/OFF

Select  on the center display.

Each time the switch is selected, the operation condition changes as follows.

AUTO→Hi (2 segments lit)→Lo (1 segment lit)→Off

The level indicator (red) lights up during operation. AUTO indicator lights up during automatic operation.

INFORMATION

■ Customization

The temperature setting of the heated steering wheel can be set through [**Vehicle customise**] on the center display. (→P.688)

*: If equipped

Seat heaters/Radiant heaters*

Warm up seat surface and leg area of the front seat occupant.

⚠ WARNING

■ To prevent minor burn injuries

Care should be taken if anyone in the following categories comes in contact with the seats when the heater is on:

- Babies, small children, the elderly, the sick and the physically challenged
- Persons with sensitive skin
- Persons who are fatigued
- Persons who have taken alcohol or drugs that induce sleep (sleeping drugs, cold remedies, etc.)

■ To prevent causes of overheating and minor burn injuries

Observe the following precautions when using a seat heater/radiant heater:

- Do not cover the seat with a blanket or cushion when using the seat heater.
- Do not use seat heater more than necessary.

■ Use while driving

Do not touch the radiant heater or hold your hand or foot over it by releasing a hand from the handle or a foot from the pedal.

Doing so may cause the driver to mishandle the vehicle and cause an accident, resulting in death or serious injury.

⚠ NOTICE

■ To prevent damage to the seat heaters/radiant heaters

Do not put heavy objects that have an uneven surface on the seat and do not stick sharp objects (needles, nails, etc.) into the seat.

■ To prevent 12-volt battery discharge

Do not use the functions when the EV system is off.

INFORMATION

■ Operating conditions of seat heaters

The power switch is in ON

*: If equipped

Operating conditions of radiant heaters

The power switch is in ON and seat belt is fastened.

Turn the front seat heaters/radiant heaters ON/OFF

Vehicles without radiant heaters: Select  or  on the center display.

Vehicles with radiant heaters: Select  or  on the center display.

Each time the switch is selected, the operation condition changes as follows.

AUTO → Hi (3 segments lit) → Mid (2 segments lit) → Lo (1 segment lit) → Off

The level indicator (red) lights up during operation. AUTO indicator lights up during automatic operation.

INFORMATION

The radiant heater can be used when

- The power may be turned off automatically be continually touching the heater section. In that case, turn the radiant heater switch on the center display again.
- It may take some time for the heater temperature to rise.

Position of the radiant heaters

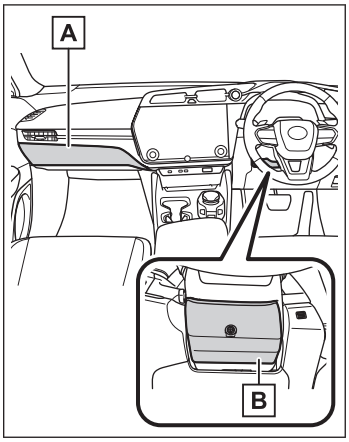

A Front passenger's side radiant heater

B Driver's side radiant heater

Customization

The temperature setting of the seat heaters of the front seats can be set through [**Vehicle customise**] on the center display. (→P.688)

Turns the rear seat heaters on/off*

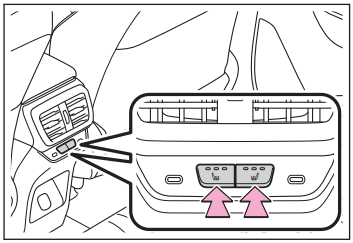

Press the switch.

Each time the switch is pressed, the operation condition changes as follows.

Hi (3 segments lit) → Mid (2 segments lit) → Lo (1 segment lit) → Off

The level indicators (yellow) light up during operation.

*: If equipped

Seat ventilators*

Using fans inside the seats, improved ventilation can be provided at the surface of the seats.

NOTICE

■ To prevent damage to the seat ventilators

Do not put heavy objects that have an uneven surface on the seat and do not stick sharp objects (needles, nails, etc.) into the seat.

■ To prevent 12-volt battery discharge

Do not use the functions when the EV system is off.

INFORMATION

■ Operating conditions

The power switch is in ON.

Turn the seat ventilators (front) ON/OFF

Select  or  on the center display.

Each time the switch is selected, the operation condition changes as follows.

AUTO→ Hi (3 segments lit) → Mid (2 segments lit) → Lo (1 segment lit) → Off

The level indicator (blue) lights up during operation. AUTO indicator lights up during automatic operation.

INFORMATION

■ Air conditioning system-linked control mode

When a seat ventilator is set to Hi, the fan speed of the seat ventilator may increase according to the fan speed of the air conditioning system.

■ Customization

The temperature setting of the seat ventilators can be set through [**Vehicle customise**] on the center display.

*: If equipped

Using the panoramic fixed moon roof with one-touch frosted glass control*

Use the overhead switches to change the moon roof between opaque and transparent.

⚠ WARNING

Observe the following precautions.

■ Panoramic fixed moon roof with one-touch frosted glass control

Do not disassemble or repair the panoramic fixed moon roof with one-touch frosted glass control because it contains high voltage parts. Contact your Lexus dealer if the panoramic fixed moon roof with one-touch frosted glass control needs repair.

■ To prevent burns

If the vehicle is left in direct sunlight for a long time, the underside of the glass roof could become very hot and could cause burns.

INFORMATION

■ Panoramic fixed moon roof with one-touch frosted glass control can be operated when

The power switch is in ON.

■ Using the voice control system

The front wipers can be operated one sweep using the voice control system.

For details, refer to the "Multimedia Owner's Manual".

■ When the moon roof is transparent

- Stripes (interference patterns) may appear on the moon roof under some weather conditions or depending on how the light shines the interior and exterior of the vehicle.
- The moon roof may appear opaque, depending on the angle.

■ The moon roof at low temperatures

The moon roof may take some time to change between opaque and transparent. Allow the interior of the vehicle to warm up before use.

■ Turning the power switch to OFF

The transparent moon roof automatically returns to opaque when the power switch is turned to OFF.

*: If equipped

If the indicator on the dimming switch flashes

The panoramic fixed moon roof with one-touch frosted glass control may be malfunctioning. Have the vehicle inspected by your Lexus dealer immediately.

When the vehicle is subjected to a strong impact

The moon roof changes to opaque and cannot be changed back to transparent .Have the vehicle inspected by your Lexus dealer.

Changing the moon roof between opaque and transparent

Press the dimming switch.

The moon roof is changed between opaque and transparent each time the dimming switch is pressed.

The indicator A on the dimming switch turns on when the moon roof is transparent.

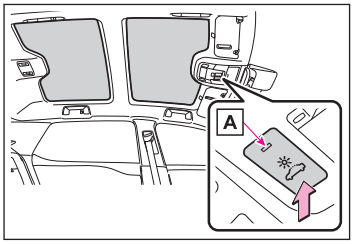

Using the roof shades

⚠ WARNING

Observe the following precautions.

Failure to do so may cause the roof shades to drop, possibly obstructing the driver's view or leading to an accident resulting in death or serious injury.

- Before installing/removing the roof shades, park the vehicle in a safe place.
- Make sure that the roof shades are installed securely.
- When installing a roof shade, take care so that the roof shade does not come in contact with a person/object.

⚠ NOTICE

Preventing damage to the roof shades when installing/removing them

- Do not attempt to install the roof shades to vehicles other than your vehicle.
- When installing a roof shade, do not place anything between the panoramic fixed moon roof with one-touch frosted glass control and the roof shade.
- When removing a roof shade, make sure to hold it by the strap.
- Do not forcibly twist the roof shade.

⚠ NOTICE

■ Preventing damage to the roof shades after they are removed

- After removing the roof shades, make sure to store them into the storage bag.
- Do not put anything other than the roof shades in the storage bag.
- When storing the roof shades, do not forcibly pull the storage bag.
- When storing the roof shades, do not leave them leaning on something.
- Do not place anything on the removed roof shades.
- Make sure that luggage around the stored roof shades will not come in contact with them.

Installing and removing the roof shades

1 Take the roof shades out of the storage bag.

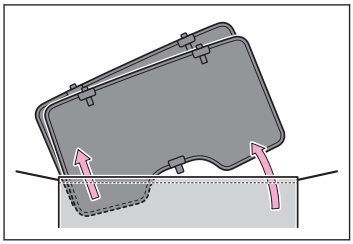

2 Insert portion A as shown in the illustration.

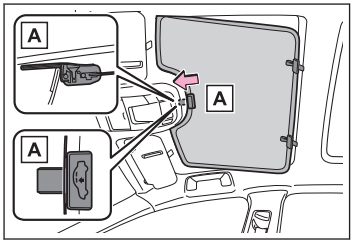

3 Insert portions B as shown in the illustration.

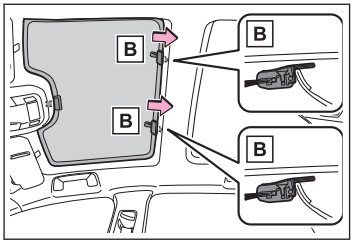

4 Insert portion C as shown in the illustration.

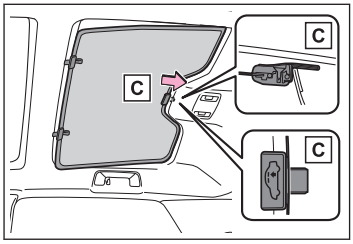

5 Insert portions D as shown in the illustration.

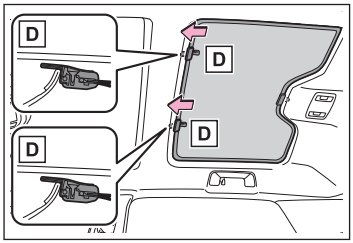

6 To remove the roof shades, follow the above installation procedure in reverse order.

Storing the removed roof shades

● Put the roof shades into the storage bag.

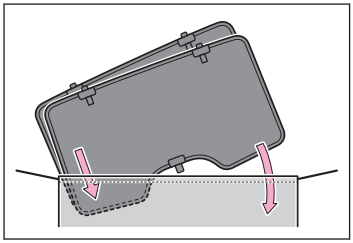

Storing the storage bag containing the roof shades (on the deck board)

● Place the roof shades in the storage bag onto the deck board.

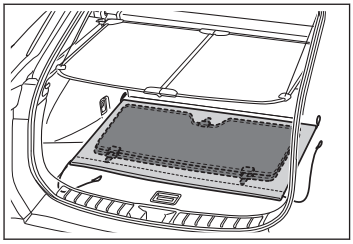

Storing the storage bag containing the roof shades (combined with the luggage cover)

1 Put the roof shades into the storage bag.

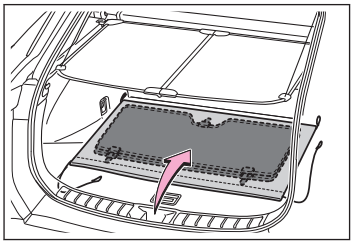

2 Remove the luggage cover and place it on top of the roof shades contained in the storage bag.

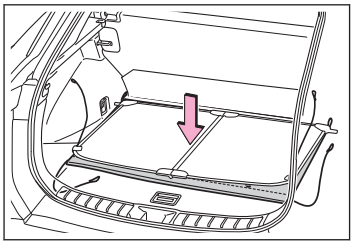

3 Install the fastening strings of the storage bag on to the portions A of the luggage cover.

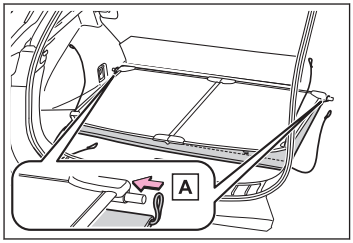

4 Install the luggage cover and then install the fastening strings of the luggage cover to the hooks on both sides.

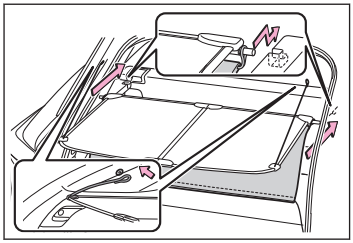

5 Install the fastening strings of the storage bag to the hooks on both sides.

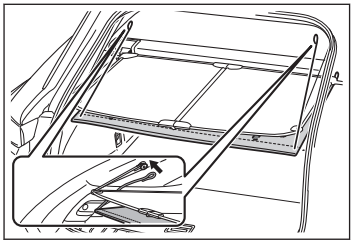

Using the interior lights

Location of the interior lights

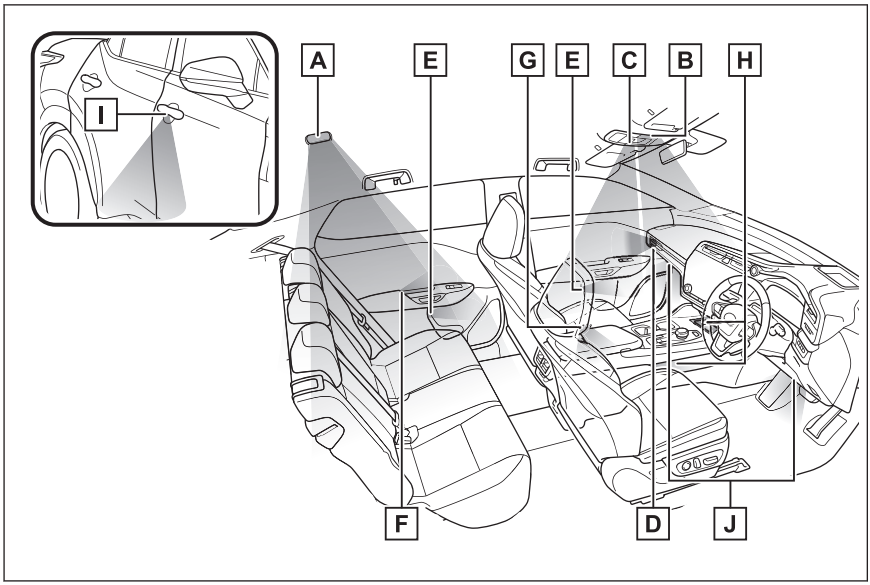

A Rear interior light
B Front interior light
C Personal lights
D Door trim ornament lights*1
E Door pocket lights*1
F Inside handle lights*1
G Door courtesy lights
H Auxiliary box lights*1
I Outer foot lights
J Footwell lights*1

INFORMATION

Each lights automatic on/off

- Illuminated entry system: The lights automatically turn on/off according to power switch mode, the presence of the electronic key, whether the doors are locked/

*1: On some models: The illumination color can also be changed.

unlocked, and whether the doors are opened/closed. Also, the brightness of the lights is automatically adjusted linked with the shift operation.

- If the interior lights remain on when the power switch is turned off, the lights will go off automatically after 20 minutes.

Automatic illumination of the interior lights

If any of the SRS airbags deploy (inflate) or in the event of a strong rear impact, the interior lights will turn on automatically. The interior lights will turn off automatically after approximately 20 minutes.

The interior lights can be turned off manually. However, in order to help prevent further collisions, it is recommended that they be left on until safety can be ensured. (The interior lights may not turn on automatically depending on the force of the impact and conditions of the collision.)

Using the voice control system*

The front wipers can be operated one sweep using the voice control system.

For details, refer to the "Multimedia Owner's Manual".

Customization

Some functions can be customized. (→P.689)

NOTICE

Removing light lenses

Never remove the lens for the front interior light and personal lights. Otherwise, the lights will be damaged. If the lens need to remove, contact your Lexus dealer.

To prevent 12-volt battery discharge

Do not leave the lights on longer than necessary when the EV system is off.

Interior lights

INFORMATION

The front interior lights may not operate normally when

The front interior lights may not operate normally in the following situations:

- When water, dirt, etc., have adhered to the lens surface
- When operated with a wet hand
- When wearing gloves, etc.

*: If equipped

Turning the interior lights on/off

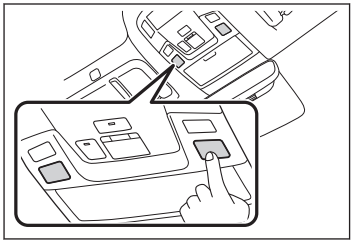

Touch the light.

The front interior light will turn on/off each time it is touched.

The rear interior light will also turn on/off.

However, when the rear interior light has already been turned on, it will not be controlled by front interior light operations.

Linking the opening/closing of the doors to the front interior light operation

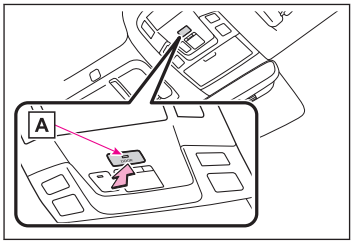

Press the DOOR switch.

The link between the front interior light operation and doors will change between ON/OFF each time the DOOR switch is pressed.

The operation of the rear interior lights will also be linked to the opening/closing of the doors.

When the door link is turned on, the indicator A will illuminate.

Turning the rear interior light on/off

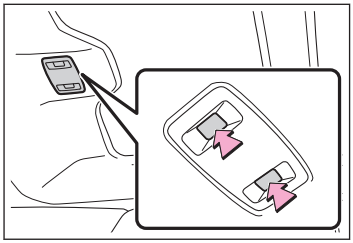

Touch the light.

The rear interior light will turn on/off each time it is touched.

Operation of the rear interior light is linked to the turning on/off of the front interior light.

When the rear interior light has been turned on by front interior light operation, the rear interior light cannot be turned off by touch the light.

Personal lights

INFORMATION

The personal lights may not operate normally when

The personal lights may not operate normally in the following situations:

- When water, dirt, etc., have adhered to the lens surface

- When operated with a wet hand
- When wearing gloves, etc.

Using the personal lights

Touch the light.

The personal lights will turn on/off each time they are touched.

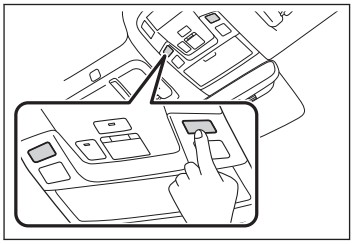

Location of the storage features

⚠ WARNING

Do not leave eyeglasses, lighters or spray cans in the storage spaces, as the following may occur when cabin temperature becomes high:

- Eyeglasses may be deformed by heat or cracked if they come into contact with other stored items.
- Lighters or spray cans may explode. If they come into contact with other stored items, a lighter may catch fire or a spray can may release gas, causing a fire hazard.

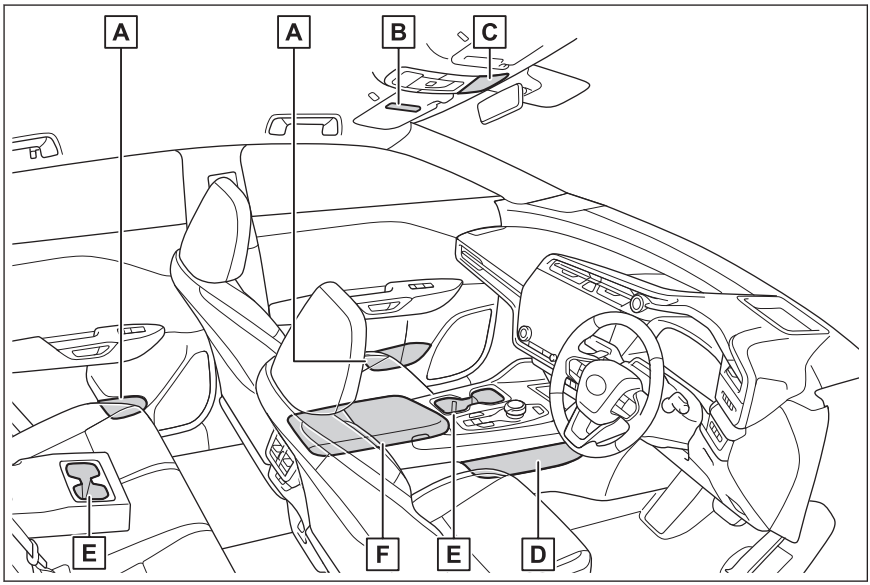

A Bottle holders
B Card holders
C Auxiliary box
D Open tray
E Cup holders
F Console box

INFORMATION

Console box light

The console box light turn on when the tail lights are on.

Locations of the bottle holders

⚠ NOTICE

When using a bottle holder, observe the following precautions.

- Do not place open bottles, glass cups, or paper cups containing liquid in the bottle holders.

  The liquid may spill out and glass cups may break.
- When storing a bottle, close the cap.

▶ **Front**

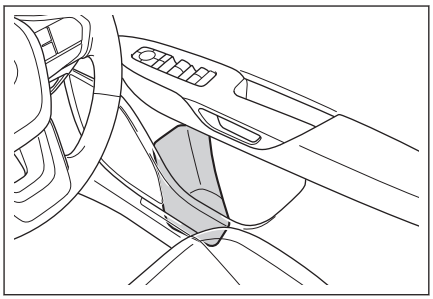

▶ **Rear**

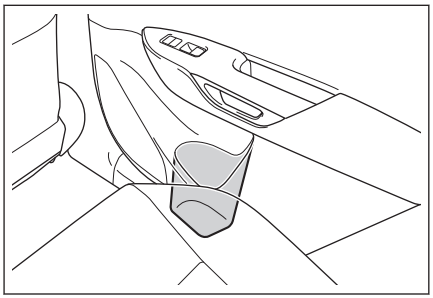

INFORMATION

■ Bottle holders

A bottle may not be able to be stored depending on its size or shape.

Location of the card holders

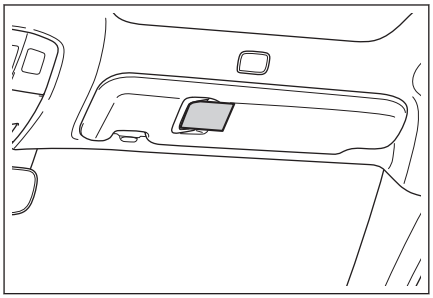

Using the auxiliary box

Press in the lid.

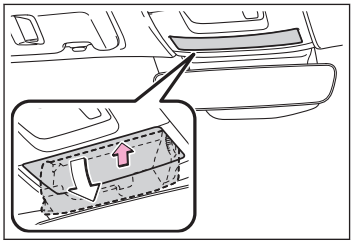

⚠ WARNING

- Do not store items heavier than 200 g (0.44 lb.). Doing so may cause the auxiliary box to open and the items inside may fall out, resulting in an accident.
- When driving or when the auxiliary box is not in use, keep the lid closed. In the event of sudden braking or sudden swerving, an accident may occur due to an occupant being struck by the items stored inside.

Using the open tray

⚠ WARNING

Observe the following precautions when putting items in the open tray.

Failure to do so may cause items to be thrown out of the tray in the event of sudden braking or steering. In these cases, the items may interfere with pedal operation or cause driver distraction, resulting in an accident.

- Do not store items in the tray that can easily shift or roll out.
- Do not stack items in the tray higher than the edge of tray.
- Do not put items in the tray that may protrude over the edge of tray.

INFORMATION

When cleaning the interior

Remove the mat to clean it.



Use the cup holders

WARNING

Do not place anything other than cups or aluminum cans in the cup holders.

Other items may be thrown out of the holders in the event of an accident or sudden braking, causing injury.

If possible, cover hot drinks to prevent burns.

▶ Front

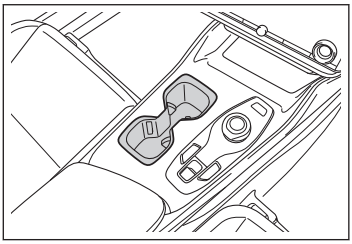

▶ Rear

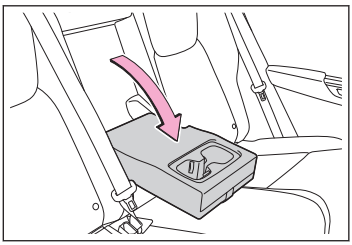

Pull down the armrest.

Using the console box

⚠ WARNING

When driving or when the console box is not in use, keep it closed.

If left open, in the event of sudden braking or swerving, an occupant may strike the console box lid or stowed items may fly out, possibly leading to an accident.

To open the console box, lift the lid while pushing the button.

The console box can be opened from either side.

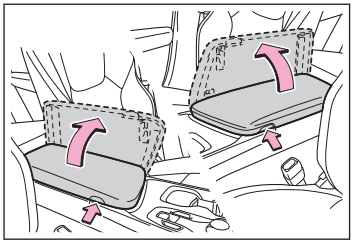

INFORMATION

■ Console box light

The console box light turns on when the tail lights are on.

Convenient interior features

Function and operation of the USB charging port

NOTICE

To prevent damage to the USB charging ports

- Do not insert foreign objects into the ports.
- Do not spill water or other liquids into the ports.
- Do not apply excessive force to or impact the USB charging ports.
- Do not disassemble or modify the USB charging ports.

To prevent damage to external devices

- Do not leave external devices in the vehicle. The temperature inside the vehicle may become high, resulting in damage to an external device.
- Do not push down on or apply unnecessary force to an external device or the cable of an external device while it is connected.

To prevent 12-volt battery discharge

Do not use the USB charging ports for a long period of time with the EV system stopped.

The USB charging ports are used to supply 3.0 A of electricity at 5 V to external devices.

The USB charging ports are for charging only. They are not designed for data transfer or other purposes.

Depending on the external device, it may not charge properly. Refer to the manual included with the device before using a USB charging port.

INFORMATION

The USB charging ports can be used when

The power switch is in ACC or ON, or the multimedia system is on.

Situations in which the USB charging ports may not operate correctly

- If a device which consumes more than 3.0 A at 5 V is connected.
- If a device designed to communicate with a personal computer, such as a USB memory device, is connected
- If the connected external device is turned off (depending on device)
- If the temperature inside the vehicle is high, such as after the vehicle has been parked in the sun

About connected external devices

Depending on the connected external device, charging may occasionally be suspended and then start again. This is not a malfunction.

Use the USB charging port

▶ **Instrument panel**

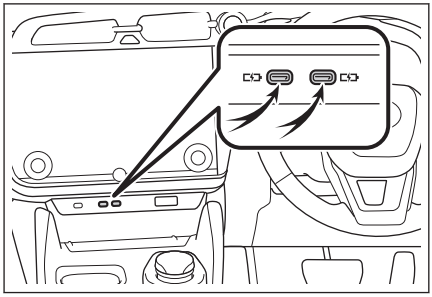

▶ **On the rear console**

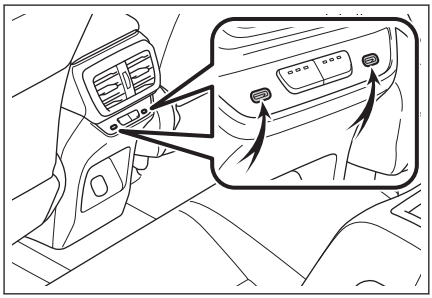

Function and operation of the power outlet (12 VDC)

⚠ NOTICE

To prevent damage to the power outlet (12 VDC)

- Do not insert foreign objects into the ports.
- Do not spill water or other liquids into the ports.
- When the power outlets (12 VDC) are not in use, close the lids. If a foreign object or liquid enters a port may cause a short circuit.
- Do not apply excessive force to or impact the power outlets (12 VDC) ports.

To prevent 12-volt battery discharge

Do not use the power outlets (12 VDC) for a long period of time with the EV system stopped.

The power outlet can be used to supply power for devices which operate on 12 VDC at less than 10A (power consumption of 120 W).

When connecting multiple devices, make sure that the total power consumption of all the connected devices is less than 120 W.

INFORMATION

■ The power outlet can be used when

The power switch is in ACC or ON, or the multimedia system is on.

■ When stopping the EV system

Disconnect electrical devices with charging functions, such as mobile battery packs.

If such devices are left connected, the EV system may not stop normally.

Using the accessory sockets (12 VDC)

▶ Instrument panel

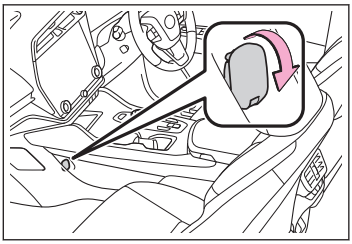

Open the lid.

▶ On the rear console

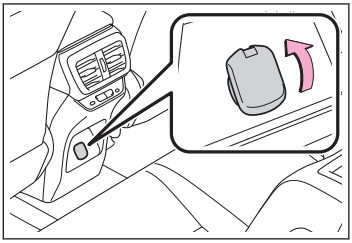

Open the lid.

▶ **In the luggage compartment**

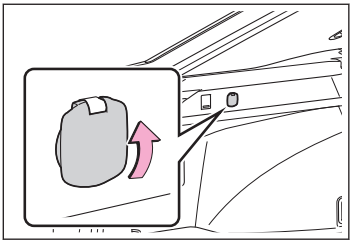

Open the lid.

Function and operation of the wireless charger*

A portable device, such as a smartphone or mobile battery, can be charged by just placing it on the charging area, provided the device is compatible with the Qi wireless charging standard created by the Wireless Power Consortium. The compatible portable devices can be found on the following Wireless Power Consortium website. https://www.wirelesspowerconsortium.com/

The wireless charger cannot be used with a portable device that is larger than the charging tray. Additionally, depending on the portable device, the wireless charger may not operate properly. Refer to the operation manual of the portable device.

⚠ WARNING

■ Caution while driving

When charging a portable device while driving, for safety reasons, the driver should not operate the portable device.

■ Precautions for when driving

Do not charge small, lightweight portable devices, such as wireless earbuds, while driving. Lightweight devices may fly off of the charging tray, possibly leading to an accident.

■ Caution regarding interference with electronic devices

People with implantable cardiac pacemakers, cardiac resynchronization therapy pacemakers or implantable cardioverter defibrillators, as well as any other electrical medical device, should consult their physician about the usage of the wireless charger.

Operations of the wireless charger may have an affect on medical devices.

■ To prevent damage or burns

Observe the following precautions.

Failure to do so may result in the possibility of fire, equipment failure or damage, or burns due to heat.

*: If equipped

⚠ WARNING

- Do not put any metallic objects between the charging area and the portable device while charging.
- Do not attach metallic objects, such as aluminum stickers, to the charging area.
- Do not charge portable devices with aluminum stickers or other metallic objects attached to the side which touches the charging area.
- Do not store items on the wireless charger instead of in an auxiliary box.
- Do not apply force or impact to the wireless charger.
- Do not disassemble, modify or remove the wireless charger.
- Do not attempt to charge portable devices which are not compatible with the Qi wireless charging standard.
- Do not allow magnetic objects to come near the wireless charger
- Do not perform charging if the charging area is dirty
- Do not cover the wireless charger with a cloth or other object while charging.

⚠ NOTICE

■ Preventing malfunction and corruption of data

- Do not place magnetic cards, such as a credit cards, or magnetic recording media, close to the wireless charger while charging, otherwise, data may be erased.

  Additionally, do not bring precision instruments such as wrist watches, close to the wireless charger, as such objects may malfunction.
- Do not perform charging with a contactless smart card, such as a transportation system IC card, between the charging surface of a portable device and the charging area. The IC chip in the card may become extremely hot, possibly damaging the portable device or smart card.

  Be extra careful to not charge a portable device with a case or cover which a contactless smart card can be inserted.
- Do not leave portable devices in the vehicle. The temperature inside the vehicle may become high, when in direct sunlight, possibly damaging the device.

■ To prevent 12-volt battery discharge

Do not use the wireless charger for a long period of time with the EV system stopped.

INFORMATION

The wireless charger can be operated when

The power switch is in ACC or ON, or the multimedia system is on.

Portable devices that can be charged

- Portable devices compatible with the Qi wireless charging standard can be charged by the wireless charger. However, compatibility with portable devices that comply with Qi Ver. 1.0, 1.3.2 and later versions is not guaranteed.
- The wireless charger is designed to supply low power electricity (5 W or less) to a cellular phone, smartphone, or other portable device.

  However, portable devices, such as the following, can be charged with more than 5 W.

  - 7.5 W charging compatible iPhones can be charged at 7.5 W or less.
  - Charging at 10 W or less is supported by Galaxy device that support 10 W charging of original standard.
  - Portable devices compliant with EPP output as defined by WPC standard Ver1.3.2. can be charged at 15 W or less.

Using the smart entry & start system

During charging, when the smart entry & start system searches for an electronic key, charging may be temporarily suspended.

If a cover or accessory is attached to the portable device

Do not charge a portable device if a cover or accessory which is not Qi compatible is attached.

Depending on the type of cover (including the certain genuine manufacture parts) and/or accessory attached, it may not be possible to charge the portable device. If the portable device is placed on the charging area and does not charge, remove the cover and/or accessories.

Charging precautions

- If the electronic key cannot be detected within the vehicle interior, charging can not be done. When the door is opened and closed, charging may be temporarily suspended.
- While charging, the wireless charger and the portable device will become warm. This is not a malfunction. If a portable device becomes warm while charging and charging stops due to the protection function of the portable device, wait until the portable device cools down and charge it again. Also, to decrease the temperature inside the wireless charger, a fan may operate. This does not indicate a malfunction.

Sound generated during operation

Operation sounds may be heard when the power switch is pressed to change to ACC or ON, or when a portable device is being detected. This does not indicate a malfunction.

[Qi] symbol

The [Qi] logo is a trademark of the Wireless Power Consortium.

Trademark information

iPhone is a trademark of Apple Inc., registered in the U.S. and other countries.

Galaxy is a trademark or registered trademark of Samsung Electronics Co.,Ltd.

Names of the parts of the wireless charger

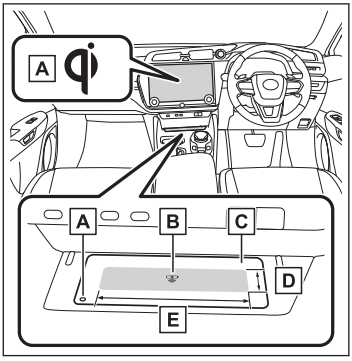

A Operation indicator light
B Charging area*1
C Charging tray
D Approximately 2.5 cm (1.0 in.)
E Approximately 10 cm (3.9 in.)

Using the wireless charger

● **Place the portable device on the wireless charger.**

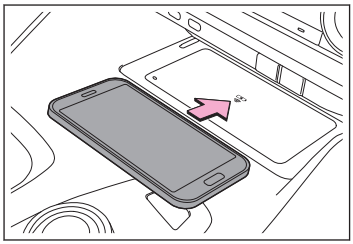

Place the charging side of the portable device down with the center of the device in the center of the charge area.

When charging, the operation indicator light (orange) on the wireless charger comes on. Refer to "Situations in which the wireless charger may not operate correctly"(→P.285) when charging is not performed.

*1: The charging coil in the wireless charger can be moved within the charge area up to the position of the charging coil inside a portable device. Charging is possible if the center of the coil of the portable device is placed within the charge area.

Additionally, if 2 or more portable devices are placed on the charging tray at the same time, each charging coil may not be detected correctly and charging may not be possible.

When charging is complete, the operation indicator light (green) on the wireless charger comes on.

INFORMATION

AM radio broadcast linked function during charging

- During charging, if noise occurs when listening to the AM radio, the charging frequency is automatically changed to reduce the noise.
- When automatically seeking AM radio stations, charging will be suspended to prevent charging noise from being detected as a radio station. Charging will resume automatically when seek tuning is stopped.

Recharging function

- If a certain amount of time has elapsed since charging completed and the portable device has not been moved, the wireless charger will restart charging.
- If a portable device is moved significantly within the charging area, the charging coil may disconnect and charging may temporarily be stopped. However, if a charging coil is detected within the charging area, the charging coil inside the wireless charger will move near the other coil and charging will resume.

Rapid charging function

The following portable devices support rapid charging.

- Portable devices compliant with WPC Ver1.3.2 and compatible with rapid charging
- iPhone's with an iOS version that supports 7.5 W charging (iPhone 8 and later models)
- Portable devices compatible with Galaxy original rapid charging standard.

  When a portable device that supports rapid charging is charged, charging automatically switches to the rapid charging function.

Situations in which the wireless charger may not operate correctly

In the following situations, the wireless charger may not operate correctly:

- When a portable device is fully charged
- When a portable device is being charged by a wired connection.
- When there is a foreign object between the charging area and portable device
- When the temperature of a portable device becomes high while charging
- When the temperature near the charging tray is 35°C (95°F) or more due to being in direct sunlight, etc.
- When a portable device is placed with its charging surface facing up
- The small portable device such as foldable type is placed in an area misaligned from the charge area

- When a portable device is larger than the charging tray
- When the vehicle is near a TV tower, electric power plant, fuel station, radio station, large display, airport, or other facility that generates strong radio waves or electrical noise
- The electronic key is not inside the vehicle
- When the any of the following objects are between the charging surface of a portable device and the charging area:
  - Thick cases or covers
  - A case or cover attached with an uneven or tilted surface, so that the charging side is not flat
  - Thick decorations
  - Accessories, such as finger rings, straps, etc.
- When there is a gap between the charging side of the portable device and the charge area due to a protrusion such as a camera on the charging side of the portable device.
- When the portable device is in contact with, or is covered by any of the following metallic objects:
  - Cards covered with metal, such as aluminum foil
  - Cigarette boxes that have aluminum foil inside
  - Metallic wallets or bags
  - Coins
  - Heat packs
  - Recorded media such as CDs and DVDs
  - Metallic decorations
  - Metallic cases or covers
  - Casing which has magnet in it on the charging side of the portable device
- When wireless keys (that emit radio waves) other than those of your vehicle are being used nearby
- When 2 or more portable devices are placed on the charging tray at the same time
- If a portable device built in S-pen (Galaxy "Note" series etc.) used, a portable device that inserted S-pen is placed on the tray

In situations other than above, if the wireless charger does not operate properly or the operation indicator light blinks continuously, the wireless charger may be malfunctioning.

Contact your Lexus dealer.

If the smartphone OS has been updated

If the smartphone OS has been updated to a newer version, its charging specifications may have changed significantly. For details, check the information on the manufacturer's website.

Wireless charger operation indicator light status

The operation indicator light of the wireless charger indicates the operating state of the wireless charger as follows:

Operation indicator light		State
Charging tray	Center display	
Turning off	Disappear	When power for Multimedia is off or the power switch is off
Green (comes on)	Gray	On Standby (charging possible state)(1)
		When charging is complete(2)
Orange (comes on)	Blue	Charging

(1) Charging power will not be output during standby. A metallic object will not be heated, if it is placed on the wireless charger in this state.

(2) Depending on the portable device, there are cases where the operation indicator light will continue being lit up orange even after the charging is complete.

Using the armrest

⚠ NOTICE

Do not apply excessive load to the armrest. Doing so may damage the armrest.

● **Fold down the armrest for use.**

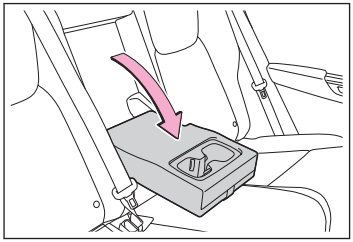

Assist grip functions and operation

⚠ WARNING

Do not use the assist grip when getting in or out of the vehicle or rising from your seat.

⚠ NOTICE

Do not hang any heavy object or put a heavy load on the assist grip.

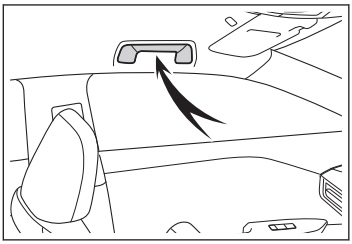

An assist grip installed on the ceiling can be used to support your body while sitting on the seat.

Locations of coat hooks

⚠ WARNING

Do not hang coat hangers or other hard or sharp objects on the hook. If the SRS curtain shield airbags deploy, these items may become projectiles, causing death or serious injury.

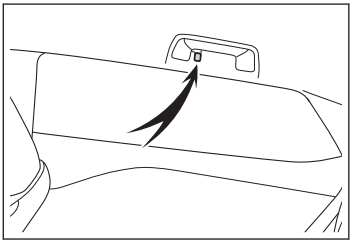

The coat hooks are provided with the rear assist grips.

Using the vanity mirrors

● Slide the cover to open.

The vanity light turns on when the cover is opened.

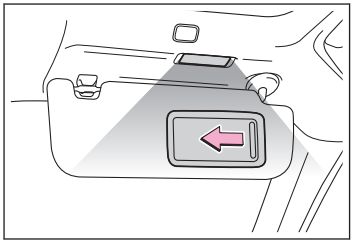

INFORMATION

Automatic light off function

When the power switch is off, if the vanity lights are turned on, they will be turned off automatically after 20 minutes.

NOTICE

Do not leave the vanity lights on longer than necessary with the EV system stopped. Doing so may lead to the 12-volt battery becoming discharged.

Panoramic fixed moon roof*

WARNING

If the vehicle is left in direct sunlight for a long time, the underside of the glass roof could become very hot and could cause burns.

*: If equipped

Using the cargo hooks

The cargo hooks are provided for securing loose items.

● Raise the hook to use.

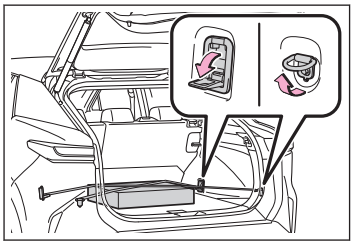

⚠ WARNING

To avoid injury, when the cargo hooks are not in use, make sure to return them to their stowed position.

Using the cargo net hooks

The cargo net can be hung using the cargo net hooks and rear cargo hooks.

● **Raise the rear cargo hooks to use.**

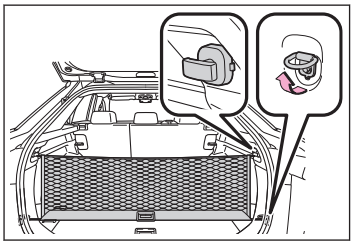

⚠ WARNING

To avoid injury, when the cargo net hooks are not in use, make sure to return them to their stowed position.

Using the grocery bag hooks

● Push the grocery back hook to use.

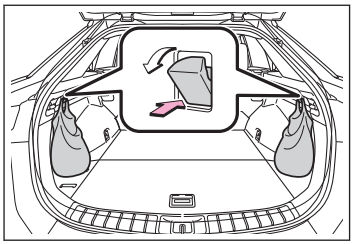

⚠ NOTICE

Do not hang objects heavier than 4 kg (8.8 lb.) on the grocery bag hooks.

Doing so may damage the grocery bag hook.

Deck board

Opening the deck board

⚠ WARNING

If a deck board has been opened or removed, return it to its original position before driving. Otherwise, in the event of sudden braking or an accident, a deck board or stored items may fly out and strike an occupant.

1 **Open the back door.**

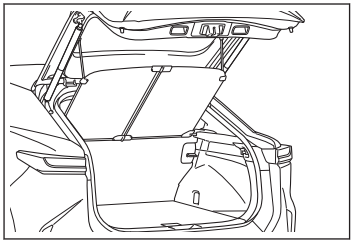

2 **Open the deck board.**

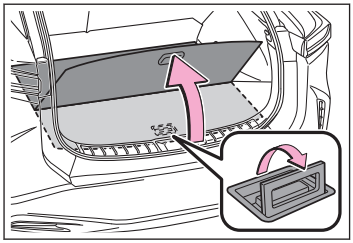

Storing items in the deck under tray

The following items can be stowed.

● Accessories

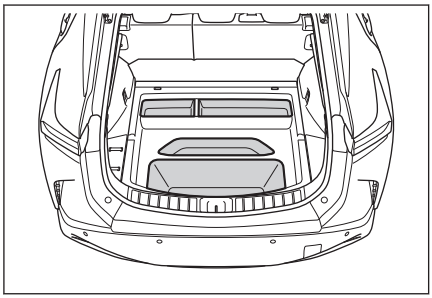

● Warning reflector*1

*1: A warning reflector itself is not included as an original equipment.

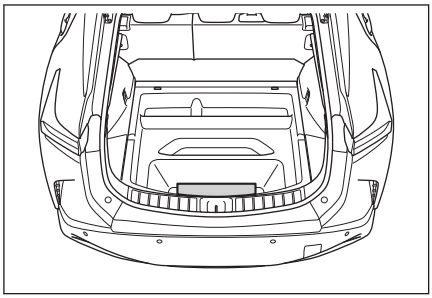

Stowing the luggage cover

1 Pull the lever upwards and fold the deck board.

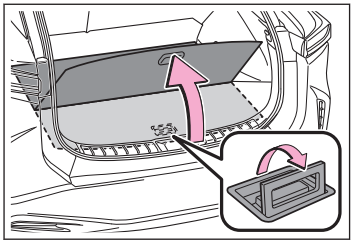

2 Unhook each cord.

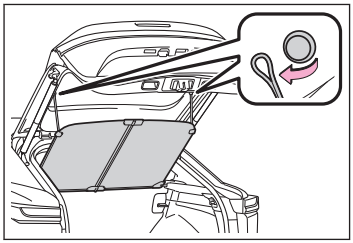

3 Remove the luggage cover.

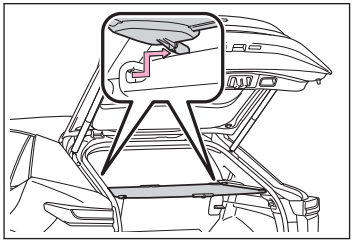

4 Fold the luggage cover.

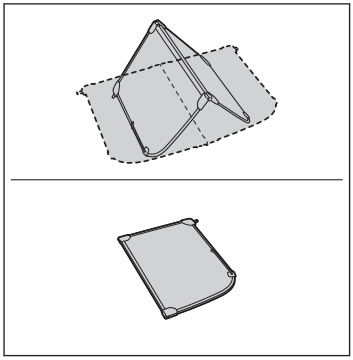

5 Stow the luggage cover in the deck under tray.

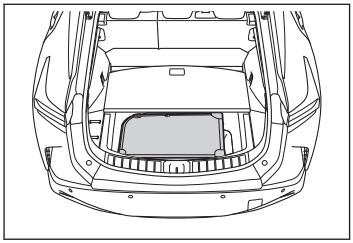

⚠ WARNING

- Do not stow items on the luggage cover. The luggage cover may be damaged, or the items may fly about and strike an occupant in the event of sudden braking or swerving.
- Do not allow children to climb on the luggage cover. Doing so may damage the luggage cover.

5 Vehicle status information and indicators

5-1. Functions and displays of the meter

Warning lights and indicators. 298

Gauges and meters..... 304

5-2. Functions of the displays

Multi-information display (vehicles without a head-up display)..... 310

Multi-information display (vehicles with a head-up display)..... 312

Head-up display..... 314

Displayed content..... 316

5-3. Changing the settings of the displays

Changing the instrument panel light brightness..... 325

Changing settings for the head-up display..... 326

Warning lights and indicators

The warning lights and indicators on the instrument cluster and outside rear view mirrors inform the driver of the status of the vehicle's various systems.

For the purpose of explanation, the following illustrations display all warning lights and indicators illuminated.

▶ **Vehicles without a head-up display**

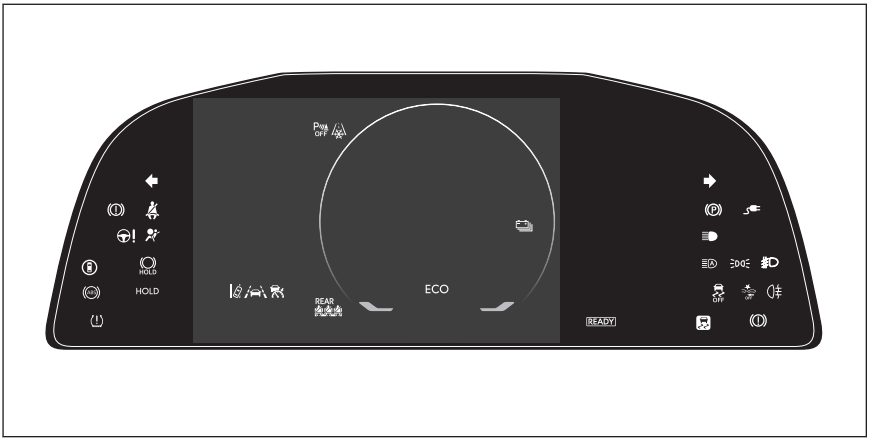

▶ **Vehicles with a head-up display**



List of warning lights

Warning lights inform the driver of malfunctions in the indicated vehicle's systems.

 (red)	Brake system warning light(1)
 (yellow)	Brake system warning light(1)
	Charging system warning light(2)
 (yellow)	Traction battery charge warning light
	SRS warning light(1)
	ABS warning light(1)
	Inappropriate pedal operation warning light(2)
 (red/yellow)	Electric power steering system warning light(1)
	Driver's and front passenger's seat belt reminder light
	Rear passengers' seat belt reminder light (vehicles without a head-up display)
	Rear passengers' seat belt reminder light (vehicles with a head-up display)
	Tire pressure warning light(1)
 (yellow)	LDA indicator

 (yellow)	LTA indicator
 (yellow)	Cruise control indicator
 (yellow)	Dynamic radar cruise control indicator
	PCS warning light(1)
	Driving assist information indicator(1)
	Lexus parking assist-sensor OFF indicator(1)
	Slip indicator(1)
 (flashes)	Parking brake indicator
 (flashes)	Brake hold operated indicator(1)

(1) These lights come on when the power switch is turned to ON to indicate that a system check is being performed. They will turn off after the EV system is started, or after a few seconds. There may be a malfunction in a system if the lights do not come on, or turn off. Have the vehicle inspected by your Lexus dealer.

(2) This light illuminates on the multi-information display.

INFORMATION

If a warning light turns on/flashes

→P.567

⚠ WARNING

Should a safety system light such as the ABS and SRS warning light not come on when you start the EV system, this could mean that these systems are not available to help protect you in an accident, which could result in death or serious injury. Have the vehicle inspected by your Lexus dealer immediately if this occurs.

List of indicators

The indicators inform the driver of the operating state of the vehicle's various systems.

	Turn signal indicator
	Tail light indicator
	Headlight high beam indicator
	AHS indicator*(1) AHB indicator(1)
	Multi Weather Lights indicator*
	Rear fog light indicator
	PCS warning light(1)(2)
 (green/white)	Cruise control indicator
 (green/white)	Dynamic radar cruise control indicator
 (green/white)	LDA indicator

*: If equipped

	LDA OFF indicator(2)
 (green/white)	LTA indicator
	Lexus parking assist-sensor OFF indicator(1)(2)
	Driving assist information indicator(1)(2)
 (flashes)	Slip indicator(1)
	VSC OFF indicator(1)(2)
	"READY" indicator
	Parking brake indicator
	Brake hold standby indicator(1)
	Brake hold operated indicator(1)
	Low outside temperature indicator(3)
	Outside rear view mirror indicators(4)
	Charging cable indicator
	Eco drive mode indicator
	Sport mode indicator
	Range mode indicator

CUSTOM	Customize mode indicator
	Stop light indicator(5)

(1) These lights come on when the power switch is turned to ON to indicate that a system check is being performed. They will turn off after the EV system is started, or after a few seconds. There may be a malfunction in a system if the lights do not come on, or turn off. Have the vehicle inspected by your Lexus dealer.

(2) This light comes on when the system is turned off.

(3) When the outside temperature is approximately 3°C (37°F) or lower, this indicator will flash for approximately 10 seconds, then stay on.

(4) This light illuminates on the outside rear view mirrors.

(5) This light comes on when the stop lights are illuminated by the operation of the brake pedal or the driving assist system.

INFORMATION

Customization

Some functions can be customized. (→P.676)

Lexus parking assist-sensor OFF indicator

Vehicles without Center Display: The indicators turn off when the shift position is changed to R regardless of whether the Lexus parking assist-sensor function is turned on or off.

Gauges and meters

Depending on the settings and system operation, the meter displays or position of some gauges will change.

▶ Vehicles without a head-up display

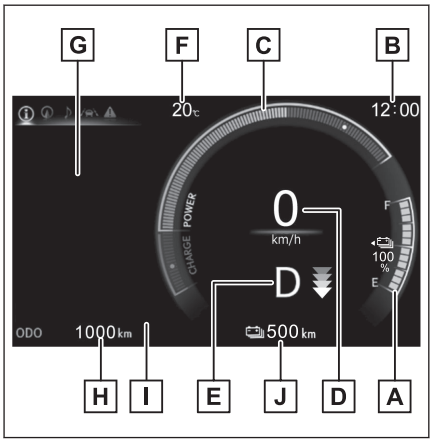

A SOC (State of Charge) gauge

Displays the amount of charge remaining in the traction battery.

B Clock

Automatically adjusts the time by using the GPS time information (GPS clock).*1

C Power meter*2/Analog speedometer*3

Power meter: Displays EV system output or regeneration level. (→P.308)

Depending on the selected drive mode or certain settings, the display will change.

D Power meter*3*4/Digital speedometer

Power meter: Displays EV system output or regeneration level. (→P.308)

E Shift position/regenerative braking power indicator (→P.177,187)

F Outside temperature

Displays the ambient temperature within the range of -40°C (-40°F) to 60°C (140°F).

G Multi-information display

*1: For details, refer to "Multimedia Owner's Manual".

*2: Displayed when the meter display type setting is set to display type 1

*3: Displayed when the meter display type setting is set to display type 2

*4: Displayed when the meter display type setting is set to display type 3

Presents the driver with a variety of vehicle data and displays warning messages if a malfunction occurs .

H Odometer and trip meter display (→P.309)

I Background color of driving mode

Background color changes according to the driving mode.

J Driving range

Displays the driving range with charge remaining in the traction battery.

▶ Vehicles with a head-up display (Ring display state*1*2)

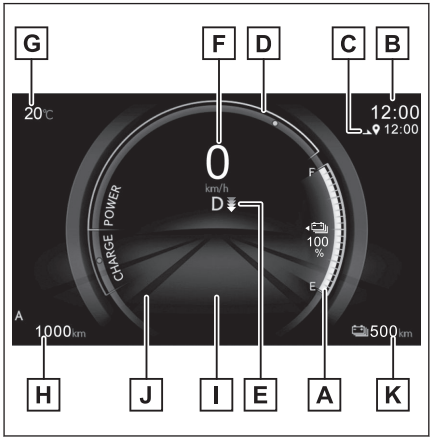

A SOC (State of Charge) gauge

Displays the amount of charge remaining in the traction battery.

B Clock

Automatically adjusts the time by using the GPS time information (GPS clock).*3

C Navigation system estimated time of arrival display

Displays the estimated time of arrival according to the navigation system.*3

D Power meter*1/Analog speedometer*2

Power meter: Displays EV system output or regeneration level. (→P.308)

Depending on the selected drive mode or certain settings, the display will change.

E Power meter*2/Shift position/regenerative braking power indicator (→P.308,177,187)

Power meter: Displays EV system output or regeneration level.

*1: Displayed when the meter display type setting is set to display type 1

*2: Displayed when the meter display type setting is set to display type 2

*3: For details, refer to "Multimedia Owner's Manual".

F Digital speedometer

G Outside temperature

Displays the ambient temperature within the range of -40°C (-40°F) to 60°C (140°F).

H Odometer and trip meter display (→P.309)

I Multi-information display

Presents the driver with a variety of vehicle data and displays warning messages if a malfunction occurs .

J Background color of driving mode

Background color changes according to the driving mode.

K Driving range

Displays the driving range with charge remaining in the traction battery.

▶ Vehicles with a head-up display (Bar display state*1)

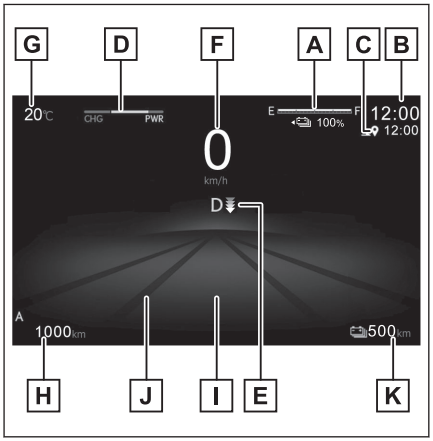

A SOC (State of Charge) gauge

Displays the amount of charge remaining in the traction battery.

B Clock

Automatically adjusts the time by using the GPS time information (GPS clock).*2

C Navigation system estimated time of arrival display

Displays the estimated time of arrival according to the navigation system.*2

D Power meter

Displays EV system output or regeneration level. (→P.308)

*1: Displayed when the meter display type setting is set to display type 3

*2: For details, refer to "Multimedia Owner's Manual".

E Shift position/regenerative braking power indicator (→P.177,187)

F Digital speedometer

G Outside temperature

Displays the ambient temperature within the range of -40°C (-40°F) to 60°C (140°F).

H Odometer and trip meter display (→P.309)

I Multi-information display

Presents the driver with a variety of vehicle data and displays warning messages if a malfunction occurs.

J Background color of driving mode

Background color changes according to the driving mode.

K Driving range

Displays the driving range with charge remaining in the traction battery.

INFORMATION

The meters and display illuminate when

The power switch is in ON.

The meters and display change to bar display state when (vehicles with a head-up display)

The meters and display automatically change to bar display state when all of the following conditions are met:

- LTA (Lane Tracing Assist) is enabled. (→P.367)
- The dynamic radar cruise control is operating. (→P.385)

Outside temperature display

- In the following situations, the correct outside temperature may not be displayed, or the display may take longer than normal to change:
  - When stopped, or driving at low speeds (less than 25 km/h [16 mph])
  - When the outside temperature has changed suddenly (at the entrance/exit of a garage, tunnel, etc.)
- When "--" or "E" is displayed, the system may be malfunctioning.

  Take your vehicle to your Lexus dealer.

Driving range

- When the air conditioning system is operating,  and the driving range with the air conditioning system on are displayed.

- The driving range may shorten even when not driving due to power consumption by the system.

Liquid crystal display

Small spots or light spots may appear on the display.

This phenomenon is characteristic of liquid crystal displays, and there is no problem continuing to use the display.

Free/Open Source Software Information

This product contains Free/Open Source Software (FOSS). The license information and/or the source code of such FOSS can be found at the following URL.
https://www.denso.com/global/en/opensource/meter/toyota/

Customization

Some functions can be customized. (→P.676)

⚠ WARNING

Allow the interior of the vehicle to warm up before using the liquid crystal information display. At extremely low temperatures, the information display monitor may respond slowly, and display changes may be delayed.

For example, there is a lag between the driver's shifting and the regenerative braking power appearing on the display. This lag could cause the driver to downshift again, causing rapid and excessive regenerative braking and possibly an accident resulting in death or injury.

Power meter

Power meter displays EV system output or regeneration level.

This illustration is for explanation only and may differ depending on the specifications of the vehicle.

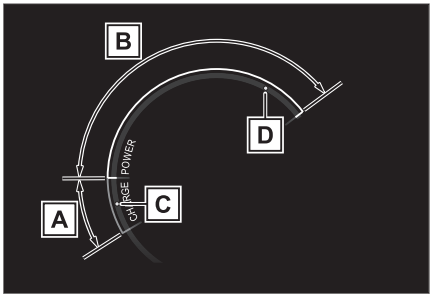

A Charge area

Shows regeneration*1 status.

Regenerated energy will be used to charge the EV battery (traction battery).

B Power area

Displays the EV system output (acceleration force) while driving.

C Regeneration*1 restrictions reference display*2

In the following situations, regenerative braking is restricted, and the references for those restrictions are displayed in the charge area.

- When the traction battery has a large amount of charge and can no longer be regenerated
- When the temperature of the traction batter is extremely high or extremely low

D Output restrictions reference display*2

In the following situations, the output is restricted, and the references for those restrictions are displayed in the power area.

- When the traction battery has a low amount of charge and can no longer output power
- When the temperature of the traction batter is extremely high or extremely low

Changing the distance driven display/resetting the distance driven

The display can be changed between the following items.

- Odometer

  Displays the total distance the vehicle has been driven.

- Trip meter A/trip meter B

  Displays the distance the vehicle has been driven since the meter was last reset. Trip meters A and B can be used to record and display different distances independently.

Each time the switch is pressed, the displayed item will be changed.

When the trip meter is displayed, pressing and holding the switch will reset the trip meter.

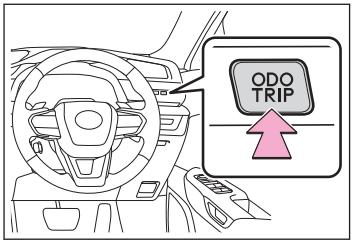

*1: When used in this manual, "regeneration" refers to the conversion of energy created by the movement of the vehicle into electrical energy.

*2: The actual restrictions may differ depending on the vehicle condition.

Multi-information display (vehicles without a head-up display)

A variety of driving-related information can be displayed. Depending on the situation, warning or advice pop-up displays will also be displayed.

Display area

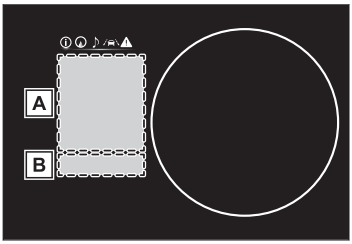

A Content display area

B Driving support system information display area

When a menu icon other than  is selected, if the driving support system operates, the system operating state will be displayed. (→P.321)

Items displayed in the content display area

By selecting menu icons on the multi-information display, the following items can be displayed.

-  Driving information display (→P.318)
-  Navigation system-linked display (→P.322)
-  Audio system-linked display (→P.322)
-  Driving support system information display (→P.321)
-  Warning message (→P.323)

INFORMATION

Liquid crystal display

Small spots or light spots may appear on the display. This phenomenon is characteristic of liquid crystal displays, and there is no problem continuing to use the display.

Changing the instrument panel light brightness

→P.325

⚠ WARNING

■ Caution for use while driving

- When operating the multi-information display while driving, pay extra attention to the safety of the area around the vehicle.
- Do not look continuously at the multi-information display while driving as you may fail to see pedestrians, objects on the road, etc. ahead of the vehicle.

■ The information display at low temperatures

Allow the interior of the vehicle to warm up before using the liquid crystal information display. At extremely low temperatures, the information display monitor may respond slowly, and display changes may be delayed.

For example, there is a lag between the driver's shifting and the regenerative braking power appearing on the display. This lag could cause the driver to downshift again, causing rapid and excessive regenerative braking and possibly an accident resulting in death or injury.

⚠ NOTICE

To prevent 12-volt battery discharge, ensure that the EV system is operating while setting up the display features.

Multi-information display (vehicles with a head-up display)

A variety of driving-related information can be displayed. Depending on the situation, warning or advice pop-up displays will also be displayed.

Display area

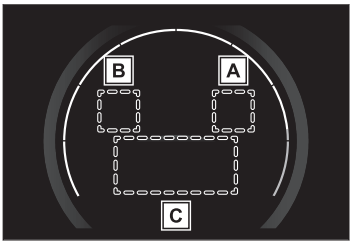

A Driving support system information display area

When driving support system information is not displayed in the content display area, if the driving support system operates, the system operating state will be displayed. (→P.321)

B Navigation system-linked display area

If the navigation system linked-display is not displayed in the content display area, route guidance will be displayed. (→P.322)

C Content display area

Items displayed in the content display area

The following items can be displayed.

- Drive information 1 (→P.318)
- Drive information 2 (→P.318)
- Audio system-linked display (→P.322)
- Navigation system-linked display*1 (→P.322)
- Driving support system information display*1 (→P.321)
- Blank (No items) (→P.319)

INFORMATION

■ Liquid crystal display

Small spots or light spots may appear on the display. This phenomenon is characteristic of liquid crystal displays, and there is no problem continuing to use the display.

■ Changing the instrument panel light brightness

→P.325

*1: Displayed on the head-up display when the display mode is set to display the maximum.

⚠ WARNING

■ Caution for use while driving

- When operating the multi-information display while driving, pay extra attention to the safety of the area around the vehicle.
- Do not look continuously at the multi-information display while driving as you may fail to see pedestrians, objects on the road, etc. ahead of the vehicle.

■ The information display at low temperatures

Allow the interior of the vehicle to warm up before using the liquid crystal information display. At extremely low temperatures, the information display monitor may respond slowly, and display changes may be delayed.

For example, there is a lag between the driver's shifting and the regenerative braking power appearing on the display. This lag could cause the driver to downshift again, causing rapid and excessive regenerative braking and possibly an accident resulting in death or injury.

⚠ NOTICE

To prevent 12-volt battery discharge, ensure that the EV system is operating while setting up the display features.

Head-up display*

The head-up display projects a variety of driving-related information and the operating state of the driving support systems on the windshield.

The content displayed will differ according to the driving conditions and display mode of the head-up display. Depending on the situation, pop-up displays will also be displayed.

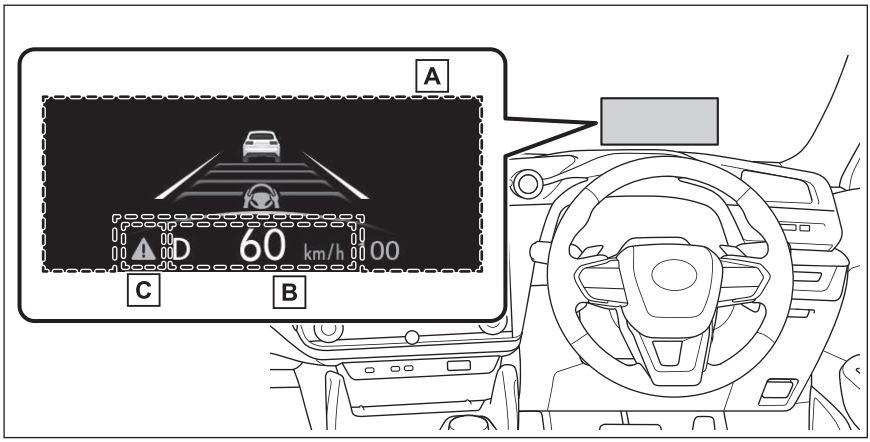

A Main display area

Displays the following items:

- Driving support system information display (→P.321)
- Power meter (→P.308)
- Compass

B Driving information display area

Displays the following items:

- Speedometer
- Shift position/regenerative braking power indicator (→P.177,187)

C ⚠: Master warning icon

Displayed when a warning message is displayed.

INFORMATION

Head-up display will operate when

The power switch is in ON.

*: If equipped

When using the head-up display

The head-up display may seem dark or hard to see when viewed through sunglasses, especially polarized sunglasses. Adjust the brightness of the head-up display or remove your sunglasses.

The power meter is displayed when

When the following conditions are met, the power meter will be displayed on the head-up display.

- The head-up display is set to display the maximum. (→P.326)
- LTA (Lane Tracing Assist) is disabled.(→P.367)
- LDA (Lane Departure Alert) is disabled.(→P.684)
- The cruise control, selected by pressing the driving assist mode select switch, is canceled. (→P.395,398)

Customization

Some functions can be customized. (→P.326)

⚠ WARNING

Do not continuously look at the head-up display while driving as you may fail to see pedestrians, objects on the road, etc. ahead of the vehicle.

⚠ NOTICE

Observe the following precautions.

- Do not place any drinks near the head-up display projector. If the projector gets wet, electrical malfunctions may result.



- Do not place anything on or put stickers onto the head-up display projector.

  Doing so could interrupt head-up display indications.
- Do not touch the inside of the head-up display projector or thrust sharp edges or the like into the projector.

  Doing so could cause mechanical malfunctions.

Displayed content

Operating the meters/displays

▶ Vehicles without a head-up display

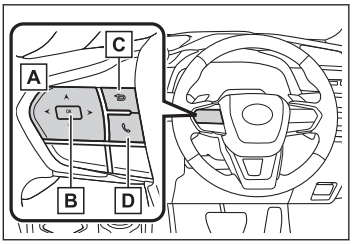

A ＜ / ＞ : Select menu icons

＾ / ˅ : Change displayed content, scroll up/down the screen and move the cursor up/down

B Enter/Set

C Return to the previous screen

D Start/receive call

Linked with the hands-free system, sending or receiving call is displayed. For details regarding the hands-free system, refer to "Multimedia Owner's Manual".

▶ Vehicles with a head-up display

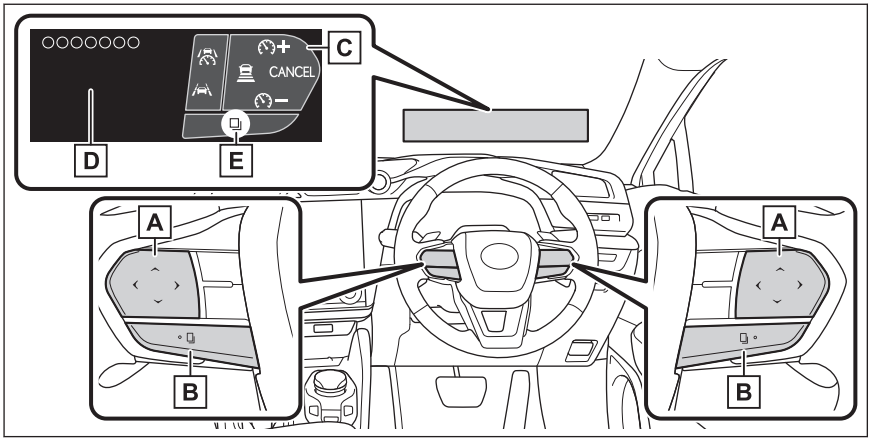

A The function of each switch differs depending on the conditions and settings.

When a switch is touched, the function of each switch is displayed on the head-up display. If the head-up display is off, or when it is not possible to display content on the head-up display, the functions will be displayed on the multi-information display.

Also, preferred functions for each switch can be set on the center display.

B Each time this switch is pressed, the functions will change.

C Switch icon display

The icon of each switch will be displayed. The touched switch will be highlighted. (E)

D Switch function guide display

The function guide for the touched switch will be displayed.

INFORMATION

■ If the steering wheel switches do not respond when touched (vehicles with a head-up display)

- It is easier to make the steering wheel switches respond by moving your thumb while touching them.
- If the surface of a steering wheel switch is dirty, turn the power switch off and then clean the switches.
- By turning winter glove mode on, the sensitivity of the switch sensors can be increased. (→P.677)

■ Customization

Some functions can be customized. (→P.677)

Switching the display of the multi-information display (vehicles without a head-up display)

● Press < or > of the meter control switch.

Switching driving information (vehicles without a head-up display)

● Press the < or > meter control switch to select ⓘ. Then press ^ or ˅.

Switching the display of the multi-information display (vehicles with a head-up display)

1 Select ⚙ on the center display.

2 Select [Vehicle customise].

3 Select [Meter].

4 Select < or > of [Display switching].

The display changes each time the switch is selected.

INFORMATION

■ Switching with the steering wheel switches

If 《DISP/DISP》 is set as a favorite steering wheel switch function, the display can be switched by pushing 《DISP or DISP》.

Display of drive information

Driving related information is displayed on the following displays.

- Multi-information display
- Head-up display*
- Center display

The items displayed will differ depending on the display.

Drive information 1

The following items can be displayed on the multi-information display.

Use the displayed values as a reference only.

- Current electricity consumption

  Displays the instantaneous current electricity consumption.

- Average electricity consumption*1

INFORMATION

■ Electricity consumption

Electricity consumption is the consumption rate of the electricity and equivalent to the fuel consumption for the gasoline vehicles. For this vehicle, electricity consumed per 100 km (**"kWh/100 km"**) is displayed as electricity consumption on each screen.

Drive information 2

The following items can be displayed on the multi-information display.

- Average vehicle speed*2

*: If equipped

*1: Average electricity consumption can be reset on the history screen of the center display. (→P.319)

*2: Average vehicle speed can be reset on the history screen of the center display. (→P.319)

● Total driving time*1

Drive information 3 (vehicles without a head-up display)

Average electricity consumption since starting can be displayed on the multi-information display.

INFORMATION

Electricity consumption

Electricity consumption is the consumption rate of the electricity and equivalent to the fuel consumption for the gasoline vehicles. For this vehicle, electricity consumed per 100 km (**"kWh/100 km"**) is displayed as electricity consumption on each screen.

Blank (No items)

Displays no drive information contents on the multi-information display.

Current electricity consumption/history screen

Electricity consumption information can be displayed on the center display.

Current electricity consumption screen

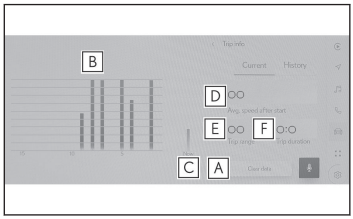

A Resetting the history data

B Electricity consumption in the past 15 minutes

C Current electricity consumption

D Average vehicle speed since the EV system was started.

E Trip range

F Elapsed time since the EV system was started.

Use the displayed average electricity consumption as a reference. The image is an example only, and may vary slightly from actual conditions.

*1: Total driving time can be reset on the history screen of the center display. (→P.319)

History electricity consumption screen

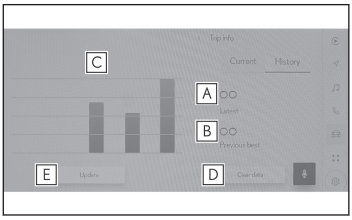

A Latest electricity consumption
B Best recorded electricity consumption
C Previous electricity consumption record
D Resetting the history data
E Updating the latest electricity consumption data

Use the displayed average electricity consumption as a reference. The image is an example only, and may vary slightly from actual conditions.

INFORMATION

Updating the history data

Update the latest electricity consumption by selecting [**Update**] to measure the current electricity consumption again.

Resetting the data

The electricity consumption data can be deleted by selecting [**Clear data**].

Trip range

Displays the estimated maximum distance that can be driven with the quantity of electricity remaining. This distance is computed based on your average electricity consumption. As a result, the actual distance that can be driven may differ from that displayed.

Displaying electricity consumption/history screen on the center display

1 Select on the main menu.
2 Select [Trip information].
3 Select [Current] or [History].

AWD operation status display

AWD operation status display can be displayed on the center display.

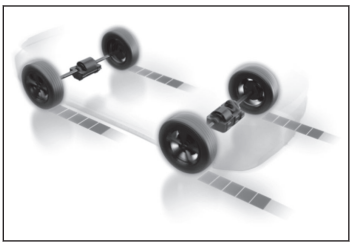

The illustration used is intended as an example, and may differ from the image that is actually displayed on the center display.

Torque distribution display:

Displays the drive status of each wheel in 6 steps from 0 to 5.

Displaying AWD operation status display on the center display

1 Select on the main menu.

2 Select [All wheel drive].

Tire pressure

The tire pressure detected by the tire pressure warning system can be displayed on the center display. (→P.534)

INFORMATION

- It may take a few minutes to display the tire inflation pressure after the power switch is turned to ON.

  It may also take a few minutes to display the tire inflation pressure after inflation pressure has been adjusted.
- "---" may be displayed if the tire position information cannot be determined due to unfavorable radio wave conditions.
- Tire inflation pressure changes with temperature. The displayed values may also be different from the values measured using a tire pressure gauge.

Displaying the tire pressure on the center display

1 Select on the main menu.

2 Select [Tyre pressure].

Driving support system information display

The operating state of the following systems can be displayed on the multi-information display or head-up display*.

- Dynamic radar cruise control
- Cruise control
- LTA (Lane Tracing Assist)
- LDA (Lane Departure Alert)
- RSA (Road Sign Assist)
- PCS (Pre-Collision System)

*: If equipped

INFORMATION

■ Display position (vehicles with a head-up display)

When the display mode of the head-up display is set to display the maximum, driving support system information will be displayed on the head-up display and not in the content display area of the multi-information display.

Audio system-linked display

The operating conditions of the audio system can be displayed on the multi-information display.

Navigation system-linked display

The following information is displayed on the multi-information display.

- Route guidance to destination
- Street name
- Compass

INFORMATION

■ Display position (vehicles with a head-up display)

Depending on the display settings of the head-up display, some content may be displayed on the head-up display and not in the content display area of the multi-information display.

Pop-up display information

Pop-up displays will be displayed on the multi-information display or the head-up display* when necessary.

When a pop-up display is displayed, a current display may no longer be displayed. In this case, the display will return after the pop-up display disappears.

Driving support systems

Displays a warning/suggestion/advice message or the operating state of a relevant system.

- Dynamic radar cruise control
- Cruise control
- LTA (Lane Tracing Assist)

*: If equipped

- LDA (Lane Departure Alert)
- PCS (Pre-Collision System)
- RSA (Road Sign Assist)
- Safe Exit Assist (with door opening control)

Warning message

Some warning messages are displayed when necessary, according to certain conditions.

Hands-free system status

Displayed when the hands-free system is operated.

Suggestion function

Displays suggestions to the driver in the following situations. To select a response to a displayed suggestion, use the steering switches.

■ Suggestion to enable the power back door

If the power back door system is disabled (setting on the center display set to off) and the power back door switch on the instrument panel is operated, a suggestion message will be displayed asking if you wish to enable the power back door system.

To enable the power back door system, select [**Yes**].

After enabling the power back door system, press the power back door switch again to open or close the power back door.

■ Suggestion to close the power windows (linked to windshield wiper operation)

If the windshield wipers are operated with a power window open, a suggestion message will be displayed asking if you wish to close the power windows.

To close all of the power windows, select [**Yes**].

■ Suggestion to close the power windows (Driving at high speeds)

If the vehicle speed exceeds a certain speed with a power window open, a suggestion message will be displayed asking if you wish to close the power windows.

To close all of the power windows, select [**Yes**].

■ Suggestion message to change to range mode

When the remaining charge of the traction battery reaches a certain level, a message suggesting to change drive modes to range mode will be displayed. (→P.231)

Select [Yes] to change to range mode.

INFORMATION

Customization

Some functions can be customized. (→P.676)

Steering wheel switch operation display

Vehicles without a head-up display

Displayed when an audio remote control switch or a talk switch on the steering wheel is operated.

Vehicles with a head-up display

When a steering wheel switch is touched, the icon of each switch and a function guide is displayed. (→P.316)

Navigation system-linked information

Depending on the situation, route guidance to destination linked to the navigation system will be displayed.

Items displayed when the power switch is turned off

The following items will be displayed on the multi-information display when the power switch is turned off.

- Charging schedule
- Average electricity consumption since starting*1
- Distance driven since starting*1
- Driving time since starting*1

*1: It is reset each time the EV system stops.

Changing the instrument panel light brightness

The brightness of the instrument panel lights can be adjusted.

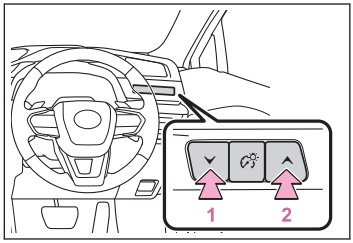

1 Darker
2 Brighter

INFORMATION

The instrument panel brightness levels when the tail lights are on and off can be adjusted individually.

However, when the surroundings are bright (daytime, etc.), turning on the tail lights will not change the instrument panel brightness.

Changing settings for the head-up display*

⚠ WARNING

Check that the position and brightness of the head-up display image does not interfere with safe driving.

Incorrect adjustment of the image's position or brightness may obstruct the driver's view and lead to an accident, resulting in death or serious injury.

⚠ NOTICE

To prevent 12-volt battery discharge, ensure that the EV system is operating while the changing the settings of the head-up display.

Changing settings with the steering wheel switches

If any of the following items have been set as a favorite steering wheel switch function, settings of the head-up display can be changed using the steering wheel switches.

- 

: Display on/off
- 

: Display mode
- 
: Height
- 
: Brightness

Changing settings on the center display

1. Select ⚙ on the center display.
2. Select [Vehicle customise].
3. Select [Head-up display].

   The following settings for the head-up display can be changed.

   - Display on/off
   - Display mode
   - Height
   - Brightness
   - Angle

*: If equipped

INFORMATION

Enabling/disabling of the head-up display

If the head-up display is disabled, it will remain disabled when the power switch is turned off then back to ON.

Display brightness

In addition to the brightness setting, the brightness of the display will change automatically according to the ambient brightness.

Head-up display automatic position adjustment (vehicles with driving position memory)

If the display position is recorded into memory, the head-up display will be automatically adjusted to the desired position.

6 Driving support system

6-1. Features of the safe driving support functions

Driving assist systems 330
Lexus Safety System + ... 338
Driver monitor 348

6-2. Using the safe driving support functions

Pre-Collision System 351
Lane Tracing Assist 365
Lane Departure Alert 370
Road Sign Assist 376
Dynamic radar cruise control 379
Cruise Control 394
Emergency Driving Stop System 400
Blind Spot Monitor 403
Safe Exit Assist 409
Lexus parking assist-sensor 415
Rear Cross Traffic Alert 425
RCD (Rear camera detection) 432
PKSB (Parking support brake) 438
Lexus Teammate Advanced Park 452
EV system output restriction when the accelerator pedal and brake pedal are depressed at the same time 484
Sudden start restraint control 485

6-3. Reducing impact to the occupants in a collision

Reducing impact to passengers in a collision 486

Driving assist systems

To keep driving safety and performance, the following systems operate automatically in response to various driving situations. Be aware, however, that these systems are supplementary and should not be relied upon too heavily when operating the vehicle.

Summary of the driving assist systems

■ ECB (Electronically Controlled Brake System)

The electronically controlled system generates braking force corresponding to the brake operation

■ ABS (Anti-lock Brake System)

Helps to prevent wheel lock when the brakes are applied suddenly, or if the brakes are applied while driving on a slippery road surface

■ Brake assist

Generates an increased level of braking force after the brake pedal is depressed when the system detects a panic stop situation

■ VSC (Vehicle Stability Control)

Helps the driver to control skidding when swerving suddenly or turning on slippery road surfaces.Provides cooperative control of the ABS, TRC, VSC and EPS.
Helps to maintain directional stability when swerving on slippery road surfaces by controlling steering performance.

■ Trailer Sway Control

Helps the driver to control trailer sway by selectively applying brake pressure for individual wheels and reducing driving torque when trailer sway is detected.

■ TRC (Traction Control)

Helps to maintain drive power and prevent the drive wheels from spinning when starting the vehicle or accelerating on slippery roads

■ Active Cornering Assist (ACA)

Helps to prevent the vehicle from drifting to the outer side by performing inner wheel brake control when attempting to accelerate while turning

■ Hill-start assist control

Helps to reduce the backward movement of the vehicle when starting on an uphill

EPS (Electric Power Steering)

Employs an electric motor to reduce the amount of effort needed to turn the steering wheel

DIRECT4 (Electronic On-Demand AWD system)

Automatically controls the drive torque distribution between the front and rear wheels according to various running conditions including normal driving, during cornering, on a uphill, when starting off, during acceleration, on a slippery roads due to snow or rain, thus contributing to stable operability and driving stability.

Emergency brake signal

When the brakes are applied suddenly, the stop lights automatically flash to alert the vehicle behind.

The Secondary Collision Brake

When the SRS airbag sensor detects a collision and the system operates, the brakes and brake lights are automatically controlled to reduce the vehicle speed and help reduce the possibility of further damage due to a secondary collision.

INFORMATION

When the TRC/VSC/Trailer Sway Control systems are operating



The slip indicator light will flash while the TRC/VSC/Trailer Sway Control systems are operating.

Disabling the TRC system

If the vehicle gets stuck in mud, dirt or snow, the TRC system may reduce power from the EV system to the wheels. Pressing the OFF switch to turn the system off may make it easier for you to rock the vehicle in order to free it.

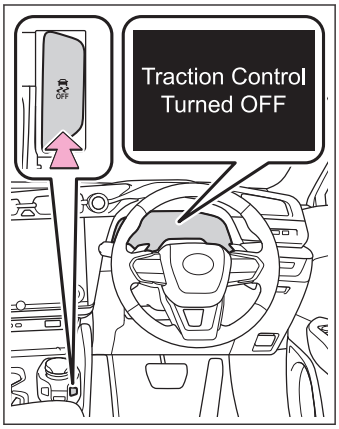

To turn the TRC system off, quickly press and release the OFF switch.

The **"Traction Control Turned OFF"** will be shown on the multi-information display.

Press the OFF switch again to turn the system back on.

Turning off both TRC, VSC and Trailer Sway Control systems

To turn the TRC, VSC and Trailer Sway Control systems off, press and hold the OFF switch for more than 3 seconds while the vehicle is stopped.

The VSC OFF indicator light will come on and the **"Traction Control Turned OFF"** will be shown on the multi-information display.*1

Press the OFF switch again to turn the system back on.

When the message is displayed on the multi-information display showing that TRC has been disabled even if the OFF switch has not been pressed

TRC is temporary deactivated. If the information continues to show, contact your Lexus dealer.

Operating conditions of hill-start assist control

When the following four conditions are met, the hill-start assist control will operate:

*1: On vehicles with PCS (Pre-Collision System), PCS will also be disabled (only Pre-Collision warning is available). The PCS warning light will come on and a message will be displayed on the multi-information display. (→P.573)

- The shift position is in a position other than P or N (when starting off forward/backward on an upward incline)
- The vehicle is stopped
- The accelerator pedal is not depressed
- The parking brake is not engaged
- Power switch is turned to ON

Automatic system cancelation of hill-start assist control

The hill-start assist control will turn off in any of the following situations:

- The shift position is shifted to P or N
- The accelerator pedal is depressed
- The brake pedal is depressed and the parking brake is engaged
- A maximum of 2 seconds have elapsed after the brake pedal is released
- Power switch is turned to OFF

Sounds and vibrations caused by the ABS, brake assist, VSC, Trailer Sway Control, TRC and hill-start assist control systems

- A sound may be heard from the motor compartment when the brake pedal is depressed repeatedly, when the EV system is started or just after the vehicle begins to move. This sound does not indicate that a malfunction has occurred in any of these systems.
- Any of the following conditions may occur when the above systems are operating. None of these indicates that a malfunction has occurred.
  - Vibrations may be felt through the vehicle body and steering.
  - A motor sound may be heard also after the vehicle comes to a stop.
  - The brake pedal may pulsate slightly after the ABS is activated.
  - The brake pedal may move down slightly after the ABS is activated.

ECB operating sound

ECB operating sound may be heard in the following cases, but it does not indicate that a malfunction has occurred.

- Operating sound heard from the motor compartment when the brake pedal is operated.
- Operating sound heard from the motor compartment when one or two minutes passed after the stop of the EV system.

Active Cornering Assist operation sounds and vibrations

When the Active Cornering Assist is operated, operation sounds and vibrations may be generated from the brake system, but this is not a malfunction.

Reduced effectiveness of the EPS system

The effectiveness of the EPS system is reduced to prevent the system from overheating when there is frequent steering input over an extended period of time. The steering wheel may feel heavy as a result. Should this occur, refrain from excessive steering input or stop the vehicle and turn the EV system off. The EPS system should return to normal within 10 minutes.

Automatic reactivation of TRC, Trailer Sway Control and VSC systems

After turning the TRC, Trailer Sway Control and VSC systems off, the systems will be automatically re-enabled in the following situations:

- When the power switch is turned off
- If only the TRC system is turned off, the TRC will turn on when vehicle speed increases. If both the TRC and VSC systems are turned off, automatic re-enabling will not occur when vehicle speed increases.

Operating conditions of Active Cornering Assist

The system operates when the following occurs.

- TRC/VSC can operate
- The driver is attempting to accelerate while turning
- The system detects that the vehicle is drifting to the outer side
- The brake pedal is released

Operating conditions of emergency brake signal

When the following conditions are met, the emergency brake signal will operates:

- The emergency flashers are off
- Actual vehicle speed is over 55 km/h (35 mph)
- The system judges from the vehicle deceleration that it is a sudden braking operation

Automatic system cancelation of emergency brake signal

The emergency brake signal will be canceled in any of the following situations:

- The emergency flashers are turned on
- The system judges from the vehicle deceleration that it is not a sudden braking operation

Secondary Collision Brake operating conditions

The system operates when the SRS airbag sensor detects a collision while the vehicle is in motion. However, the system does not operate when the components are damaged.

Secondary Collision Brake automatic cancellation

The system is automatically canceled in any of the following situations.

- The vehicle speed drops below approximately 0 km/h (0 mph)
- A certain amount of time elapses during operation
- The accelerator pedal is depressed a large amount

⚠ WARNING

The ABS does not operate effectively when

- The limits of tire gripping performance have been exceeded (such as excessively worn tires on a snow covered road).
- The vehicle hydroplanes while driving at high speed on wet or slick roads.

Stopping distance when the ABS is operating may exceed that of normal conditions

The ABS is not designed to shorten the vehicle's stopping distance. Always maintain a safe distance from the vehicle in front of you, especially in the following situations:

- When driving on dirt, gravel or snow-covered roads
- When driving with tire chains
- When driving over bumps in the road
- When driving over roads with potholes or uneven surfaces

TRC/VSC may not operate effectively when

Directional control and power may not be achievable while driving on slippery road surfaces, even if the TRC/VSC system is operating. Drive the vehicle carefully in conditions where stability and power may be lost.

Active Cornering Assist does not operate effectively when

- Do not overly rely on Active Cornering Assist. Active Cornering Assist may not operate effectively when accelerating down slopes or driving on slippery road surfaces.
- When Active Cornering Assist frequently operates, Active Cornering Assist may temporarily stop operating to ensure proper operation of the brakes, TRC and VSC.

Hill-start assist control does not operate effectively when

- Do not overly rely on hill-start assist control. Hill-start assist control may not operate effectively on steep inclines and roads covered with ice.
- Unlike the parking brake, hill-start assist control is not intended to hold the vehicle stationary for an extended period of time. Do not attempt to use hill-start assist control to hold the vehicle on an incline, as doing so may lead to an accident.

⚠ WARNING

When the TRC/VSC/Trailer Sway Control is activated

The slip indicator light flashes. Always drive carefully. Reckless driving may cause an accident. Exercise particular care when the indicator light flashes.

When the TRC/VSC/Trailer Sway Control systems are turned off

- Be especially careful and drive at a speed appropriate to the road conditions. As these are the systems to help ensure vehicle stability and driving force, do not turn the TRC/VSC systems off unless necessary.
- Trailer Sway Control is part of the VSC system and will not operate if VSC is turned off or experiences a malfunction.

Replacing tires

Make sure that all tires are of the specified size, brand, tread pattern and total load capacity. In addition, make sure that the tires are inflated to the recommended tire inflation pressure level. (→P.668)

The ABS, TRC, Trailer Sway Control and VSC systems will not function correctly if different tires are installed on the vehicle.Contact your Lexus dealer for further information when replacing tires or wheels.

Handling of tires and the suspension

Using tires with any kind of problem or modifying the suspension will affect the driving assist systems, and may cause a system to malfunction.

Trailer Sway Control precaution

The Trailer Sway Control system is not able to reduce trailer sway in all situations. Depending on many factors such as the conditions of the vehicle, trailer, road surface and driving environment, the Trailer Sway Control system may not be effective. Refer to your trailer owner's manual for information on how to tow your trailer properly.

If trailer sway occurs

Observe the following precautions.Failing to do so may cause death or serious injury.

- Firmly grip the steering wheel. Steer straight ahead. Do not try to control trailer sway by turning the steering wheel.
- Begin releasing the accelerator pedal immediately but very gradually to reduce speed.Do not increase speed. Do not apply vehicle brakes.

If you make no extreme correction with the steering or brakes, your vehicle and trailer should stabilize.

Secondary Collision Brake

Do not rely solely upon the Secondary Collision Brake. This system is designed to help reduce the possibility of further damage due to a secondary collision, however, that effect

⚠ WARNING

changes according to various conditions. Overly relying on the system may result in death or serious injury.

Lexus Safety System +

The Lexus Safety System + consists of the driving assist systems and contributes to a safe and comfortable driving experience:

⚠ WARNING

■ Lexus Safety System +

The Lexus Safety System + operates under the assumption that the driver will drive safely, and is designed to help reduce the impact to the occupants in a collision and assist the driver under normal driving conditions.

As there is a limit to the degree of recognition accuracy and control performance that this system can provide, do not overly rely on this system. The driver is solely responsible for paying attention to the vehicle's surroundings and driving safely.

■ For safe use

- Do not overly rely on this system. The driver is solely responsible for paying attention to the vehicle's surroundings and driving safely. This system may not operate in all situations and provided assistance is limited. Over-reliance on this system to drive the vehicle safely may lead to an accident resulting in death or serious injury.
- Do not attempt to test the operation of the system, as it may not operate properly, possibly leading to an accident.
- If attention is necessary while performing driving operations or a system malfunction occurs, a warning message or warning buzzer will be operated. If a warning message is displayed on the display, follow the instructions displayed.
- Depending on external noise, the volume of the audio system, etc. it may be difficult to hear the warning buzzer. Also, depending on the road conditions, it may be difficult to recognize the operation of the system.

■ When it is necessary to disable the system

In the following situations, make sure to disable the system.

Failure to do so may lead to the system not operating properly, possibly leading to an accident resulting in death or serious injury.

- When the vehicle is tilted due to being overloaded or having a flat tire
- When driving at extremely high speeds
- When towing another vehicle
- When the vehicle is being transported by a truck, ship, train, etc.
- When the vehicle is raised on a lift and the tires are allowed to rotate freely
- When inspecting the vehicle using a drum tester such as a chassis dynamometer or speedometer tester, or when using an on vehicle wheel balancer

⚠ WARNING

- When the vehicle is driven in a sporty manner or off-road
- When using an automatic car wash
- When a sensor is misaligned or deformed due to a strong impact being applied to the sensor or the area around the sensor
- When accessories which obstruct a sensor or light are temporarily installed to the vehicle
- When a compact spare tire or tire chains are installed to the vehicle or an emergency tire puncture repair kit has been used
- When the tires are excessively worn or the inflation pressure of the tires is low
- When tires other than the manufacturer specified size are installed
- When the vehicle cannot be driven stably, due to a collision, malfunction, etc.

Driving assist systems

- AHS (Adaptive High-beam System)*
  →P.200
- AHB (Automatic High Beam)
  →P.204
- PCS (Pre-Collision System)
  →P.351
- LTA (Lane Tracing Assist)
  →P.365
- LDA (Lane Departure Alert)
  →P.370
- RSA (Road Sign Assist)
  →P.376
- Dynamic radar cruise control
  →P.379
- Cruise control
  →P.394
- Emergency Driving Stop System

*: If equipped

→P.400

● Driver monitor

→P.348

Sensors used by Lexus Safety System +

Various sensors are used to obtain the necessary information for system operation.

■ Sensors which detect the surrounding conditions

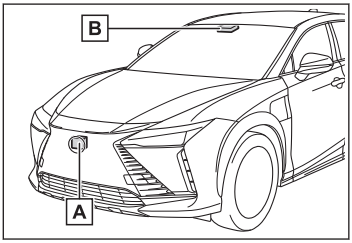

A Front radar sensor

B Front camera

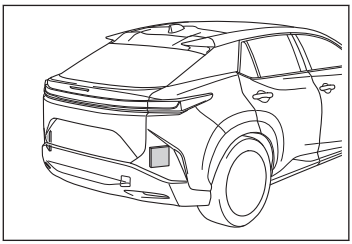

Rear side radar sensors

■ Sensors which detect the driver condition

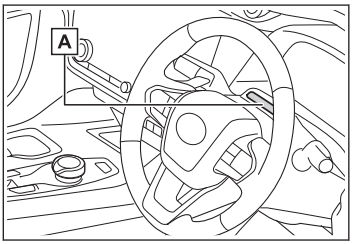

A Driver monitor camera

⚠ WARNING

■ To prevent malfunction of the radar sensors

Observe the following precautions. Failure to do so may lead to a radar sensor not operating properly, possibly leading to an accident resulting in death or serious injury.

● Keep the radar sensors and radar sensor covers clean at all times.

⚠ WARNING

Clean the front of a radar sensor or the front or back of a radar sensor cover if it is dirty or covered with water droplets, snow, etc.

When cleaning the radar sensor and radar sensor cover, use a soft cloth to remove dirt so as to not damage them.



A Radar sensor
B Radar sensor cover

- Do not attach accessories, stickers (including transparent stickers), aluminum tape, etc. to a radar sensor or radar sensor cover and their surrounding area.
- Do not subject a radar sensor or its surrounding area to impact.

  If a radar sensor, the front grille, or front bumper has been subjected to a impact, have the vehicle inspected by your Lexus dealer.
- Do not disassemble the radar sensors.
- Do not modify or paint the radar sensors or radar sensor cover, or replace them with anything other than Lexus genuine parts.
- In the following situations, recalibration of the radar sensors will be necessary.

  For details, contact your Lexus dealer.
  - When a radar sensor is removed and installed, or replaced
  - When the front bumper or the front grille has been replaced

■ To prevent malfunction of the front camera

Observe the following precautions. Failure to do so may lead to the front camera not operating properly, possibly leading to an accident resulting in death or serious injury.

- Always keep the windshield clean.
  - If the windshield is dirty or covered with an oily film, water droplets, snow, etc., clean the windshield.
  - Even if a glass coating agent is applied to the windshield, it will still be necessary to use the windshield wipers to remove water droplets, etc. from the area of the windshield in front of the front camera.
  - If the inner side of the windshield where the front camera is installed is dirty, contact your Lexus dealer.

⚠ WARNING

- Do not attach stickers (including transparent stickers) or other items to the area of the windshield in front of the front camera (shaded area in the illustration).



A Approximately 4cm (1.6 in.)
B Approximately 4cm (1.6 in.)

- If the part of the windshield in front of the front camera is fogged up or covered with condensation or ice, use the windshield defogger to remove the fog, condensation, or ice.
- If water droplets cannot be properly removed from the area of the windshield in front of the front camera by the windshield wipers, replace the wiper insert or wiper blade.
- Do not attach window tint to the windshield.
- Replace the windshield if it is damaged or cracked.

  If the windshield has been replaced, recalibration of the front camera will be necessary.

  For details, contact your Lexus dealer.
- Do not allow liquids to contact the front camera.
- Do not allow bright lights to shine into the front camera.
- Do not damage the lens of the front camera or allow it to become dirty.

  When cleaning the inside of the windshield, do not allow glass cleaner to contact the lens of the front camera. Do not touch the lens of the front camera.

  If the lens of the front camera is dirty or damaged, contact your Lexus dealer.
- Do not subject the front camera to a strong impact.
- Do not change the position or orientation of the front camera or remove it.
- Do not disassemble the front camera.
- Do not modify any parts around the front camera, such as the inside rear view mirror or ceiling.
- Do not attach accessories which may obstruct the front camera to the hood, front grille, or front bumper.

  For details, contact your Lexus dealer.
- If a surfboard or other long object is to be mounted on the roof, make sure that it will not obstruct the front camera.

⚠ WARNING

- Do not modify or change the headlights and other lights.

Front camera installation area on the windshield

If the system determines that the windshield may be fogged up, it will automatically operate the heater to defog the part of the windshield around the front camera. When cleaning, etc., be careful not to touch the area around the front camera until the windshield has cooled sufficiently, as touching it may cause burns.

Precautions for the driver monitor camera

Observe the following precautions.

Failure to do so may lead to malfunction of the driver monitor camera and the systems not operating properly, possibly leading to an accident resulting in death or serious injury.

- Do not subject the driver monitor camera or its surrounding area to strong impact.

  If subjected to a strong impact, the driver monitor camera may move out of alignment and the driver may no longer be detected correctly.

  In this case, have the vehicle inspected by your Lexus dealer.
- Do not disassemble or modify the driver monitor camera.
- Do not attach accessories, stickers (including transparent stickers), etc. to the driver monitor camera or its surrounding area.
- Do not allow the driver monitor camera or its surrounding area to get wet.
- Do not cover the driver monitor camera or place anything in front of it.
- Keep the lens of the driver monitor camera free from damage.
- Do not touch the lens of the driver monitor camera or allow it to become dirty.

  When there is dirt or fingerprints on the camera lens, clean it with a dry, soft cloth so as to not mark or damage it.
- When cleaning the lens, do not use detergents or organic solvents that may damage plastic.

INFORMATION

Situations in which the sensors may not operate properly

- When the height or inclination of the vehicle has been changed due to modifications
- When the windshield is dirty, fogged up, cracked or damaged
- When the ambient temperature is high or low
- When mud, water, snow, dead insects, foreign matter, etc., is attached to the front of the sensor

- When in inclement weather such as heavy rain, fog, snow, or a sandstorm
- When water, snow, dust, etc. is thrown up in front of the vehicle, or when driving through mist or smoke
- When the headlights are not illuminated while driving in the dark, such as at night or when in a tunnel
- When the lens of a headlight is dirty and illumination is weak
- When the headlights are misaligned
- When a headlight is malfunctioning
- When the headlights of another vehicle, sunlight, or reflected light shines directly into the front camera
- When the brightness of the surrounding area changes suddenly
- When driving near a TV tower, broadcasting station, electric power plant, radar equipped vehicles, etc., or other location where strong radio waves or electrical noise may be present
- When a wiper blade is blocking the front camera
- When in a location or near objects which strongly reflect radio waves, such as the following:
  - Tunnels
  - Truss bridges
  - Gravel roads
  - Rutted, snow-covered roads
  - Walls
  - Large trucks
  - Manhole covers
  - Guardrail
  - Metal plates
- When near a step or protrusion
- When a detectable vehicle is narrow, such as a small mobility vehicle
- When a detectable vehicle has a small front or rear end, such as an unloaded truck

- When a detectable vehicle has a low front or rear end, such as a low bed trailer



- When a detectable vehicle has extremely high ground clearance



- When a detectable vehicle is carrying a load which protrudes from its cargo area
- When a detectable vehicle has little exposed metal, such as a vehicle which is partially covered with cloth, etc.
- When a detectable vehicle is irregularly shaped, such as a tractor, sidecar, etc.
- When the distance between the vehicle and a detectable vehicle has become extremely short
- When a detectable vehicle is at an angle
- When snow, mud, etc. is attached to a detectable vehicle
- When driving on the following kinds of roads:
  - Roads with sharp curves or winding roads
  - Roads with changes in grade, such as sudden inclines or declines
  - Roads which is sloped to the left or right
  - Roads with deep ruts
  - Roads which are rough and unmaintained
  - Roads which frequently undulate or are bumpy
- When the steering wheel is being operated frequently or suddenly
- When the vehicle is not in a constant position within a lane
- When parts related to this system, the brakes, etc. are cold or extremely hot, wet, etc.
- When the wheels are misaligned
- When driving on slick road surfaces, such as when it is covered with ice, snow, gravel, etc.

- When the course of the vehicle differs from the shape of a curve
- When the vehicle speed is excessively high when entering a curve
- When entering/exiting a parking lot, garage, car elevator, etc.
- When driving in a parking lot
- When driving through an area where there are obstructions which may contact your vehicle, such as tall grass, tree branches, a curtain, etc.
- When driving in strong wind

■ Situations in which the lane may not be detected

- When the lane is extremely wide or narrow
- Immediately after changing lanes or passing through an intersection
- When driving in a temporary lane or lane regulated by construction
- When there are structures, patterns, shadows which are similar to lane lines in the surrounding
- When there are multiple white lines for a lane line
- When the lane lines are not clear or driving on a wet road surface
- When a lane line is on a curb
- When driving on a bright, reflective road surface, such as concrete

■ Situations in which some or all of the functions of the system cannot operate

- When a malfunction is detected in this system or a related system, such as the brakes, steering, etc.
- When the VSC, TRC, or other safety related system is operating
- When the VSC, TRC, or other safety related system is off

■ Changes in brake operation sound and pedal response

- When the brakes have been operated, brake operation sounds may be heard and the brake pedal response may change, but this does not indicate a malfunction.
- When the system is operating, the brake pedal may feel stiffer than expected or sink. In either situation the brake pedal can be depressed further. Further depress the brake pedal as necessary.

■ Situations in which the driver monitor may not operate properly

In situations such as the following, the driver monitor camera may not be able to detect the driver's face, and the function may not operate properly.

- When the inside of the vehicle is hot, such as after the vehicle has been parked in the sun

- When a very bright light, such as the sun or the headlights of following vehicle, shines onto the driver monitor camera
- When the brightness inside the vehicle changes frequently due to the shadows of surrounding structures, etc.
- When a very bright light, such as the sun or the headlights of an oncoming vehicle, is shining onto the driver's face
- When light, either inside or outside of the vehicle, is being reflected from the lenses of eyeglasses or sunglasses
- When there are multiple faces in the detection range of the driver monitor camera, such as when a front or rear passenger is leaning toward the driver's seat
- When the driver's face is outside of the detection range of the driver monitor camera, such as when leaned forward or when their head is outside of the window
- When the driver monitor camera is being blocked by the steering wheel, a hand holding the steering wheel, an arm, etc.
- When the driver is wearing a hat
- When the driver is wearing an eyepatch
- When the driver is wearing eyeglasses or sunglasses that do not easily transmit infrared rays
- When the driver is wearing contact lenses
- When the driver is wearing a face mask
- When the driver is laughing or their eyes are only slightly open
- When the driver's eyes, nose, mouth, or shape of their face is blocked
- When the driver is wearing makeup which makes it difficult to detect their eyes, nose, mouth, or shape of their face
- When the driver's eyes are blocked by the frame of eyeglasses, sunglasses, hair, etc.
- When there is a device inside the vehicle that radiates near infrared rays, such as a non-genuine driver monitoring system.

Driver monitor

Driver monitor

Basic functions

During controlled driving, the driver monitor camera detects the position and direction the driver is facing, and whether their eyes are opened or closed. Through this, the system determines if the driver is checking their surroundings and if the driver can perform driving operations.

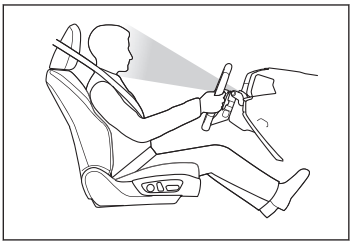

In order to operate properly, the driver monitor camera requires an unobstructed view of the driver's face. If the steering column or seat position is either too high or too low, or if any other condition is present that obstructs the driver monitor camera's view of the driver's face, some driving support systems may not operate properly, or a warning message may be displayed.

■ Warning function

In situations such as the following, a buzzer will sound and a message will be displayed to warn the driver.

- When the system determines that the driver is not paying attention to the road or their eyes are closed
- When the driver's face cannot be detected or the system determines that the driver has poor driving posture

When the seated position of the driver is such that the upper or lower part of the meter is not visible, the driver's entire face may not be recognized by the driver monitor camera. To mitigate the appearance of this warning, adjust the steering wheel and seat position so the driver can see the entire meter.

■ Face identification

The driver monitor is used as a device to identify faces in order to identify an individual.

For information about how to use the face identification function, priorities among other devices of individual identification, and linked vehicle settings, see My Settings. (→P.238)

⚠ WARNING

For safe use

- The driver monitor is not designed to prevent the driver from driving carelessly or having a poor driving posture. Pay careful attention to the surrounding conditions in order to ensure safe driving.
- The driver monitor cannot reduce drowsiness. If you feel unable to concentrate or drowsy, take a break and sleep as necessary in order to ensure safe driving.

INFORMATION

Warning function

These functions may not operate when the vehicle speed is low.

Face identification

Face identification starts when the door is opened then closed.

In face identification, facial traits are digitized and stored in a built-in computer, to be used for identification in My Settings.

- Face image or video are not stored. Voice is not stored either.
- Digitized face information is not used for any purpose other than identification in My Settings. Additionally, face information cannot be decoded and will not be disclosed or provided to a third party.
- Face information can be deleted by yourself.
- For the handling of face information, please consent to the following before using it:
  - Face identification does not guarantee a complete identity authentication, collation, or identification.
  - When face information registration fails frequently or face identification fails frequently, the driver cameras should be cleaned or face information should be registered again.
  - Face information stored in the vehicle computer cannot be decoded or moved to another media. Therefore, it is necessary to register face information again once it is deleted or relevant parts are replaced.
  - Once deleted, face information cannot be restored. It is necessary to register face information again.

Situations where face identification may not be performed correctly

This system is designed for use to identify facial traits. In the following situations, face information may not be able to be registered or identified correctly:

- When a part of the driver's face (eyebrows, eyes, nose, or mouth) is not visible

- When the driver is wearing glasses/sun glasses, a face mask, muffler, etc.
- When the driver is not facing front
- When part of driver's face is covered with hair, beard, a hand, clothes, jewelry, etc.
- When the driver is closing eyes
- When a non-registered driver is a twin, etc. with a registered driver, whose face looks quite alike with each other

■ **Situations in which the driver monitor may not operate properly**

→P.346

Changing Driver monitor settings

The settings of Driver monitor can be changed through customize settings.
(→P.685)

Pre-Collision System

PCS (Pre-Collision System)

The pre-collision system uses sensors to detect objects (→P.351) in the path of the vehicle. When the system determines that the possibility of a frontal collision with a detectable object is high, a warning operates to urge the driver to take evasive action and the potential brake pressure is increased to help the driver avoid the collision. If the system determines that the possibility of a collision is extremely high, the brakes are automatically applied to help avoid the collision or help reduce the impact of the collision.

The pre-collision system can be disabled/enabled and the warning timing can be changed. (→P.363)

⚠ WARNING

■ For safe use

- Driving safely is solely the responsibility of the driver. Pay careful attention to the surrounding conditions in order to ensure safe driving.

  Never use the pre-collision system in place of normal braking operations. This system cannot help avoid or reduce the impact of a collision in every situation. Over-reliance on this system to drive the vehicle safely may lead to an accident resulting in death or serious injury.
- Although the pre-collision system is designed to help avoid or help reduce the impact of a collision, its effectiveness may change according to various conditions. Therefore, it may not always be able to achieve the same level of performance.Read the following items carefully. Do not overly rely on this system and always drive carefully.
- For safe use: →P.338

■ When to disable the pre-collision system

- When it is necessary to disable the system: →P.338

Detectable objects

The system can detect the following as detectable objects. (Detectable objects differ depending on the function.)

- Vehicles
- Bicycles*1
- Pedestrians

*1: Detected as a detectable object only when being ridden.

● Motorcycles*1

● Walls

System functions

■ Pre-collision warning

When the system determines that the possibility of a collision is high, a buzzer will sound and an icon and warning message will be displayed on the multi-information display to urge the driver to take evasive action.

If the detectable object is a vehicle, moderate braking will be performed with the warning.

If the system determines that the accelerator pedal is strongly depressed, the following icon and message will be displayed on the multi-information display.

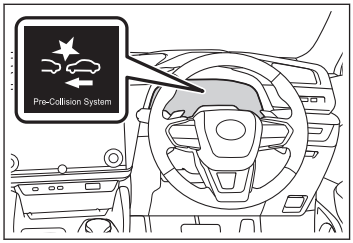

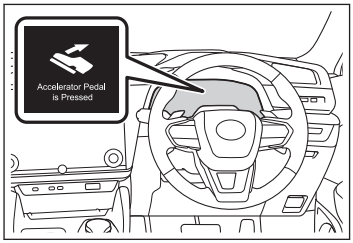

■ Pre-collision brake assist

If the system determines that the possibility of a collision is high and the brake operation by the driver is insufficient, the braking power will be increased.

■ Pre-collision brake control

If the system determines that the possibility of a collision is extremely high, the brakes are automatically applied to help avoid the collision or reduce the impact of the collision.

*1: Detected as a detectable object only when being ridden.

Emergency steering assist

If the system determines that the following conditions are met, assistance will be provided to help enhance vehicle stability and prevent lane departure. During assistance, in addition to the pre-collision warning, the following icon will be displayed on the multi-information display.

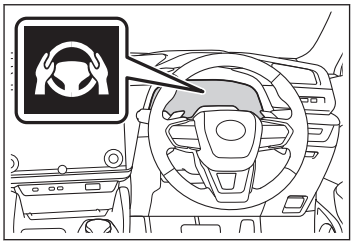

- The possibility of a collision is high
- There is sufficient space within the lane to perform evasive steering maneuvers
- The driver is operating the steering wheel

During assistance, the pre-collision warning will operate and a message will be displayed to warn the driver.

Intersection collision avoidance support (left/right turn)

In situations such as the following, if the system determines that the possibility of a collision is high, the pre-collision warning and pre-collision braking will operate.

Depending on the intersection, assistance may not operate correctly.

- When turning left/right at an intersection and crossing the path of an oncoming vehicle

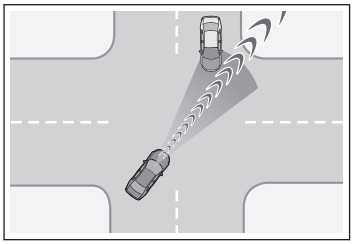

- When turning left/right and a pedestrian or bicycle is detected

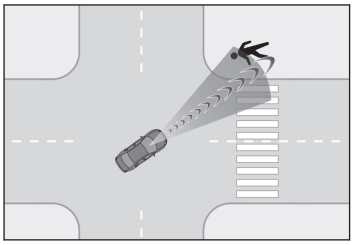

Intersection collision avoidance support (crossing vehicles)

At an intersection, etc., if the system determines that the possibility of a collision with an approaching vehicle or motorcycle is high, the pre-collision warning and pre-collision braking will operate.Depending on the intersection, assistance may not operate correctly.

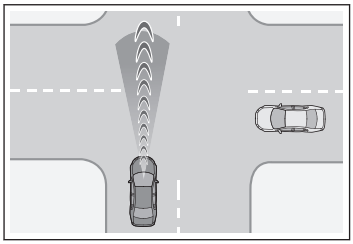

Acceleration Suppression at Low Speed

When driving at a low speed, if the accelerator pedal is strongly depressed and the system determines that there is a possibility of a collision, EV system output will be restrained or the brakes will be applied weakly to restrict acceleration. During operation, a buzzer will sound and a warning indicator and message will be displayed on the multi-information display.

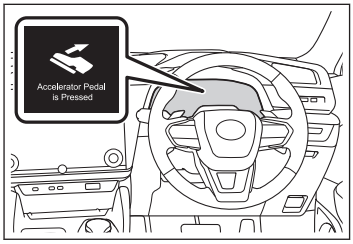

⚠ WARNING

Pre-collision braking

- When the pre-collision braking function is operating, a large amount of braking force will be applied.
- The pre-collision braking function is not designed to hold the vehicle stopped. If the vehicle is stopped by pre-collision brake control, the driver should operate the brakes immediately as necessary.
- The pre-collision braking function may not operate if certain operations are performed by the driver. If the accelerator pedal is being depressed strongly or the steering wheel is being turned, the system may determine that the driver is taking evasive action and possibly prevent the pre-collision braking function from operating.
- If the brake pedal is being depressed, the system may determine that the driver is taking evasive action and possibly delay the operation timing of the pre-collision brake control.

Acceleration Suppression at Low Speed

- If the steering wheel is being turned, the system may determine that the driver is taking evasive action and possibly prevent the Acceleration Suppression at Low Speed function from operating or possibly causing its operation to be canceled.

⚠ WARNING

Emergency steering assist

- The emergency steering assist will be canceled when the system determines that lane departure prevention control has completed.
- Depending on operations performed by the driver, emergency steering assist may not operate or operation may be canceled.
  - If the accelerator pedal is depressed strongly, the steering wheel is turned heavily, the brake pedal is depressed, or the turn signal lever is operated, the system may determine that the driver is taking evasive action and the emergency steering assist may not operate.
  - While the emergency steering assist is operating, if the accelerator pedal is depressed strongly, the steering wheel is turned heavily, or the brake pedal is depressed, the system may determine that the driver is taking evasive action and emergency steering assist operation may be canceled.
  - While the emergency steering assist is operating, if the steering wheel is held or turned in the opposite direction of system operation, emergency steering assist operation will be canceled.

INFORMATION

Operating conditions of each function of the pre-collision system

The pre-collision system is enabled and the system determines that the possibility of a frontal collision with a detected object is high.

However, the system will not operate in the following situations:

- When the vehicle has not been driven a certain amount after a terminal of the 12-volt battery has been disconnected and reconnected
- When the shift position is in R

The following are the operational speeds and cancelation conditions of each function:

- Pre-collision warning

Detectable objects	Vehicle speed	Relative speed between your vehicle and object
Preceding vehicles, stopped vehicles	Approximately 5 to 180 km/h (3 to 110 mph)	Approximately 5 to 180 km/h (3 to 110 mph)
Oncoming vehicles	Approximately 30 to 180 km/h (20 to 110 mph)	Approximately 80 to 220 km/h (50 to 130 mph)

Detectable objects	Vehicle speed	Relative speed between your vehicle and object
Bicycles	Approximately 5 to 80 km/h (3 to 50 mph)	Approximately 5 to 80 km/h (3 to 50 mph)
Pedestrians	Approximately 5 to 80 km/h (3 to 50 mph)	Approximately 5 to 80 km/h (3 to 50 mph)
Preceding motorcycles, stopped motorcycles	Approximately 5 to 180 km/h (3 to 110 mph)	Approximately 5 to 80 km/h (3 to 50 mph)
Oncoming motorcycles	Approximately 30 to 180 km/h (20 to 110 mph)	Approximately 30 to 180 km/h (20 to 110 mph)

While the pre-collision warning is operating, if the steering wheel is operated heavily or suddenly, the pre-collision warning may be cancelled.

● Pre-collision brake assist

Detectable objects	Vehicle speed	Relative speed between your vehicle and object
Preceding vehicles, stopped vehicles	Approximately 30 to 180 km/h (20 to 110 mph)	Approximately 10 to 180 km/h (7 to 110 mph)
Bicycles	Approximately 30 to 80 km/h (20 to 50 mph)	Approximately 30 to 80 km/h (20 to 50 mph)
Pedestrians	Approximately 30 to 80 km/h (20 to 50 mph)	Approximately 30 to 80 km/h (20 to 50 mph)
Preceding motorcycles, stopped motorcycles	Approximately 30 to 180 km/h (20 to 110 mph)	Approximately 10 to 80 km/h (7 to 50 mph)

● Pre-collision braking

Detectable objects	Vehicle speed	Relative speed between your vehicle and object
Preceding vehicles, stopped vehicles	Approximately 5 to 180 km/h (3 to 110 mph)	Approximately 5 to 180 km/h (3 to 110 mph)
Oncoming vehicles	Approximately 30 to 180 km/h (20 to 110 mph)	Approximately 80 to 220 km/h (50 to 130 mph)

Detectable objects	Vehicle speed	Relative speed between your vehicle and object
Bicycles	Approximately 5 to 80 km/h (3 to 50 mph)	Approximately 5 to 80 km/h (3 to 50 mph)
Pedestrians	Approximately 5 to 80 km/h (3 to 50 mph)	Approximately 5 to 80 km/h (3 to 50 mph)
Preceding motorcycles, stopped motorcycles	Approximately 5 to 180 km/h (3 to 110 mph)	Approximately 5 to 80 km/h (3 to 50 mph)
Oncoming motorcycles	Approximately 30 to 180 km/h (20 to 110 mph)	Approximately 30 to 180 km/h (20 to 110 mph)

If either of the following occur while the pre-collision braking function is operating, it will be canceled:

- The accelerator pedal is strongly depressed
- The steering wheel is operated heavily or suddenly

● Emergency steering assist

The emergency steering assist will not operate when the turn signal lights are flashing.

The emergency steering assist will not operate when the VSC OFF indicator is illuminated.

Detectable objects	Vehicle speed	Relative speed between your vehicle and object
Preceding vehicles, stopped vehicles, bicycles, pedestrians, motorcycles	Approximately 40 to 80 km/h (25 to 50 mph) Active steering function: *1 to 80 km/h (*1 to 50 mph)	Approximately 40 to 80 km/h (25 to 50 mph) Active steering function: *1 to 80 km/h (*1 to 50 mph)

While the emergency steering assist is operating, if any of the following are performed, emergency steering assist operation may be cancelled:

- The accelerator pedal is strongly depressed
- The steering wheel is operated heavily or suddenly
- The brake pedal is depressed

● Intersection collision avoidance support (left/right turn)

*1: Minimum vehicle speed: Vehicle speed at which evasion using pre-collision brake control is difficult

The intersection collision avoidance support (for left/right turning vehicles) will not operate when the turn signal lights are not flashing.

Detectable objects	Vehicle speed	Oncoming vehicle speed	Relative speed between your vehicle and object
Oncoming vehicles	Approximately 5 to 40 km/h (3 to 25 mph)	Approximately 5 to 75 km/h (3 to 45 mph)	Approximately 10 to 115 km/h(7 to 70 mph)
Pedestrians	Approximately 5 to 30 km/h (3 to 20 mph)	—	Approximately 5 to 40 km/h(3 to 25 mph)
Bicycles	Approximately 5 to 30 km/h (3 to 20 mph)	—	Approximately 5 to 50 km/h(3 to 30 mph)
Oncoming motorcycles	Approximately 5 to 40 km/h (3 to 25 mph)	Approximately 5 to 75 km/h (3 to 45 mph)	Approximately 10 to 115 km/h (7 to 70 mph)

- Intersection collision avoidance support (crossing vehicles)

Detectable objects	Vehicle speed	Crossing vehicle speed	Relative speed between your vehicle and object
Vehicles, Motorcycles (side)	Approximately 5 to 60 km/h (3 to 38 mph)	● Your vehicle speed or less ● Approximately 40 km/h or less (25 mph or less)	Approximately 5 to 60 km/h (3 to 38 mph)

- Acceleration Suppression at Low Speed

The Acceleration Suppression at Low Speed function will not operate when the turn signal lights are flashing.

Detectable objects	Vehicle speed	Relative speed between your vehicle and object
Preceding vehicles, stopped vehicles, Pedestrians, Bicycles, Wall	Approximately 0 to 15 km/h (0 to 9 mph)	Approximately 0 to 15 km/h (0 to 9 mph)

While the Acceleration Suppression at Low Speed function is operating, if any of the following are performed, the low speed sudden acceleration suppression function operation will be cancelled:

- The accelerator pedal is released.
- The steering wheel is operated heavily or suddenly

Detection of detectable objects

Objects are detected based on their size, shape, and movement. Depending on the ambient brightness, movement, posture and direction of a detectable object, it may not be detected and the system may not operate properly.The system detects shapes, such as the following, as detectable objects.



Situations in which the system may operate even though the possibility of a collision is not high

● In certain situations, such as the following, the system may determine that the possibility of a collision is high and operate:

- When passing a detectable object
- When changing lanes while overtaking a detectable object
- When suddenly approaching a detectable object
- When approaching a detectable object or other object on the roadside, such as guardrails, utility poles, trees, walls, etc.
- When there is a detectable object or other object by the roadside at the entrance of a curve



- When there are patterns or a painting ahead of the vehicle that may be mistaken for a detectable object

- When passing a detectable object that is changing lanes or turning left/right



- When passing a detectable object which is stopped to make a left/right turn



- When a detectable object stops immediately before entering the path of the vehicle
- When passing through a location with a structure above the road (traffic sign, billboard, etc.)



- When approaching an electric toll gate barrier, parking lot barrier, or other barrier that opens and closes
- When turning left/right and an oncoming vehicle, oncoming motorcycle, pedestrian or bicycle crosses in front of the vehicle
- When attempting to turn left/right in front of an oncoming vehicle, oncoming motorcycle, pedestrian or bicycle
- When turning left/right and an oncoming vehicle, oncoming motorcycle, pedestrian or bicycle stops or changes course immediately before entering the path of the vehicle

- When turning left/right and an oncoming vehicle turns left/right in front of the vehicle



- When the steering wheel is operated toward the path of an oncoming vehicle
- When there is an object moving above or under the road



Situations in which the system may not operate properly

In certain situations, such as the following, a detectable object may not be detected by the front sensors, and the system may not operate properly:

- When a detectable object is approaching your vehicle
- When your vehicle or a detectable object is wandering
- When a detectable object makes an abrupt maneuver (such as sudden swerving, acceleration or deceleration)
- When suddenly approaching a detectable object
- When the detectable object is near a wall, fence, guardrail, manhole cover, steel plate on the road surface, or another vehicle
- When there is a structure above a detectable object
- When part of a detectable object is hidden by another object (large luggage, umbrella, guardrail, etc.)
- When multiple detectable objects are overlapping
- When a bright light, such as the sun, is reflecting off of a detectable object
- When a detectable object is white and looks extremely bright
- When the color or brightness of a detectable object causes it to blend in with its surroundings
- When a detectable object cuts in front of or suddenly emerges in front of your vehicle

- When approaching a vehicle which is diagonal
- If a bicycle is a child sized bicycle, is carrying a large load, is carrying an extra passenger, is carrying a forward leaning rider, or has an unusual shape (bicycles equipped with a child seat, tandem bicycles, etc.)
- If a pedestrian or bicycle is shorter than approximately 1 m (3.2 ft.) or taller than approximately 2 m (6.5 ft.).
- When the silhouette of a pedestrian or bicycle is unclear (such as when they are wearing a raincoat, long skirt, etc.)
- When a pedestrian is bending forward or squatting
- When a pedestrian or bicycle is moving at high speed
- When a pedestrian is pushing a stroller, wheelchair, bicycle or other vehicle
- When a detectable object blends in with the surrounding area, such as when it is dim (at dawn or dusk) or dark (at night or in a tunnel)
- When the vehicle has not been driven for a certain amount of time after the EV system was started
- While turning left/right or a few seconds after turning left/right
- While driving around a curve and a few seconds after driving around a curve
- When turning left/right and an oncoming vehicle is driving in a lane 3 or more lanes from the vehicle
- When driving in a traffic lane separated by more than one lane where oncoming vehicles are driving while making a right/left turn
- When turning left/right and the direction of the vehicle differs greatly from the direction traffic flows in the oncoming lane
- When largely out of place with the opposite facing targeted oncoming vehicle during a right/left turn



- When turning left/right, a pedestrian or bicycle behind the vehicle comes in front of it as if it overtakes the vehicle



- When at an intersection, the approaching crossing vehicle is long in overall length, such as a large truck, towing trailer, etc.

● In addition to the preceding, in certain situations, such as the following, the emergency steering assist may not operate properly:

- When a detectable object is too close to the vehicle
- When there is insufficient space to perform evasive steering maneuvers or an obstruction exists in the evasion direction
- When there is an oncoming vehicle

● In addition to the preceding, in certain situations, such as the following, walls may not be detected as a target object and the Acceleration Suppression at Low Speed function may not operate properly:

- When scenery behind the wall is visible, such as a glass door, grid fence, etc.
- When the wall is slanted or low
- When the wall is narrow, such as a pole, etc.
- When the wall is made of plants, such as a hedge, etc.
- When the road, etc. is reflected on the wall
- When the vehicle is approaching the wall at an angle

Changing the pre-collision setting

● The pre-collision system can be enabled/disabled through a customize setting. (→P.683)

The system is enabled each time the power switch is turned to ON.

● When the system is disabled, the PCS warning light will illuminate and a message will be displayed on the multi-information display.

● The pre-collision setting can be changed on the customize settings. (→P.683)

● When the pre-collision warning timing is changed, the emergency steering assist (excluding the active steering function) timing will also be changed.

When [**Later**] is selected, the emergency steering assist (excluding the active steering function) will not operate in most cases.

- When the system determines that the driver is not facing forward, the pre-collision warning and emergency steering assist will operate at the [**Earlier**] timing, regardless of the user setting.
- When the dynamic radar cruise control is operating, the pre-collision warning will operate at the [**Earlier**] timing, regardless of the user setting.

Lane Tracing Assist

LTA (Lane Tracing Assist)

LTA functions

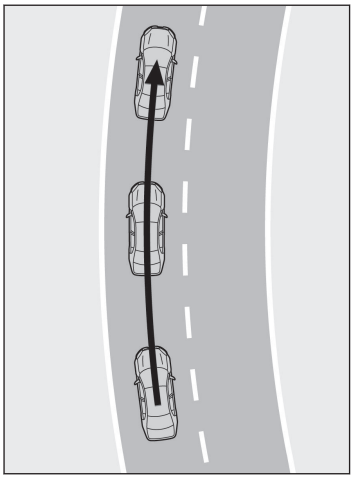

- When driving on a road with clear lane lines with the dynamic radar cruise control operating, lane lines and preceding and surrounding vehicles are detected using the front camera and radar sensor, and the steering wheel is operated to maintain the vehicle's lane position.

  Use the this function only on highways and expressways.

  If the dynamic radar cruise control is not operating, the function will not operate.

  In situations where the lane lines are difficult to see or are not visible, such as when in a traffic jam, support will be provided using the path of preceding and surrounding vehicles.

  If the system determines that the steering wheel has not been operated for a certain amount of time or the steering wheel is not being firmly gripped, the driver will be alerted and this function will be temporarily canceled.

  If the steering wheel is firmly gripped, the function will begin operating again.

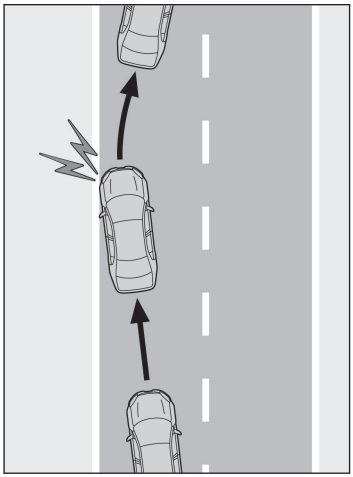

- When the function is operating, if the vehicle is likely to depart from its lane, the driver will be alerted via a display and buzzer.

  When the buzzer sounds, check the area around the vehicle and carefully operate the steering wheel to move the vehicle back to the center of the lane.

⚠ WARNING

Before using the LTA system

- Do not overly rely on the LTA system. The LTA system is not a system which provides automated assistance in driving and it is not a system which reduces the amount of attention necessary for safe driving. The driver is solely responsible for paying attention to their surroundings and operating the steering wheel as necessary to ensure safety. Also, the driver is responsible for taking adequate breaks when fatigued, such as when driving for a long time.
- Failure to perform appropriate driving operations and pay careful attention may lead to an accident.
- When not using the LTA system, turn it off using the LTA switch.

INFORMATION

Operating conditions of function

This function is operable when all of the following conditions are met:

- The LTA system detects lane lines or the path of preceding or surrounding vehicles.
- The dynamic radar cruise control is operating.
- The lane width is approximately 3 to 4 m (10 to 13 ft.).
- The turn signal lever is not being operated.
- The vehicle is not being driven around a sharp curve.
- The vehicle is not accelerating or decelerating more than a certain amount.
- The steering wheel is not being turned with a large force.
- The hands off steering wheel warning (→P.367) is not operating.
- The vehicle is being driven in the center of a lane.

Temporary cancelation of functions

- When the operating conditions are no longer met, a function may be temporarily canceled. However, when the operation conditions are met again, operation of the function will automatically be restored. (→P.366)
- If the operating conditions of a function are no longer met while the function is operating, a buzzer may sound to indicate that the function has been temporarily canceled.
- The steering assist operation of the function can be overridden by the steering wheel operation of the driver.

Lane departure warning function when the LTA is operating

- Even if the LDA warning method is changed to vibration of the steering wheel, if the vehicle deviates from the lane while the LTA is operating, the warning buzzer will sound to alert the driver.
- If steering wheel operation equivalent to that necessary for a lane change is detected, the system will determine the vehicle is not deviating from the lane and the warning will not operate.

Hands off steering wheel warning operation

- When the system determines the driver is not holding the steering wheel, a message urging the driver to grip the steering wheel and the icon shown in the illustration will be displayed on the multi-information display to warn the driver. If the system detects that the steering wheel is held, the warning will be canceled. When using the system, make sure to grip the steering wheel firmly, regardless of whether the warning is operating or not.



- If no operations are detected for a certain amount of time, the warning will operate and the function will be temporarily canceled. This warning may also operate if the driver only operates steering wheel a small amount continuously.

Situations in which the hands off steering wheel warning may not operate properly

- Depending on the condition of the vehicle, handle control condition and road surface, the warning function may not operate.

Enabling/disabling the system

The LTA will change between ON/OFF each time the LTA switch is pressed.

When the LTA is ON, the LTA indicator will illuminate.

▶ Vehicles without a head-up display

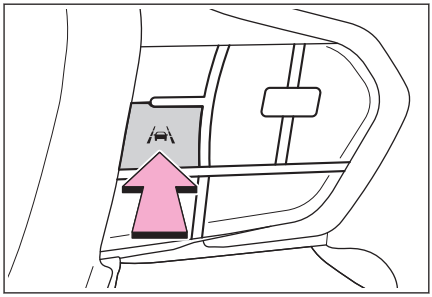

▶ Vehicles with a head-up display

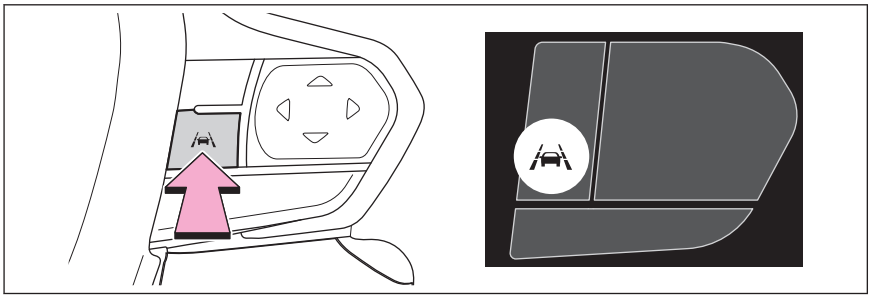

⚠ WARNING

■ Situations in which the functions may not operate properly

In the following situations, the functions may not operate properly and the vehicle may depart from its lane. Do not overly rely on these functions. The driver is solely responsible for paying attention to their surroundings and operating the steering wheel as necessary to ensure safety.

- When a preceding or surrounding vehicle changes lanes (Your vehicle may follow the preceding or surrounding vehicle and also change lanes)



- When a preceding or surrounding vehicle is swaying (Your vehicle may sway accordingly and depart from the lane)
- When a preceding or surrounding vehicle departs from a lane (Your vehicle may follow the preceding or surrounding vehicle and also depart from the lane)
- When a preceding or surrounding vehicle is being driven extremely close to the left/right lane line (Your vehicle may follow the preceding or surrounding vehicle accordingly and depart from the lane)
- When there are moving objects or structures in the surrounding area (Depending on the position of the moving object or structure relative to your vehicle, your vehicle may sway)
- When the vehicle is struck by a crosswind or the turbulence of other nearby vehicles
- Situations in which the sensors may not operate properly: →P.343
- Situations in which the lane may not be detected: →P.346
- When it is necessary to disable the system: →P.338

Operation display of steering wheel operation support

The operating state of the LTA system is indicated.

Indicator	Lane display	Steering icon	Situation
 White	 Grey/White	 Grey	LTA is on standby
 Green	 Green	 Green	LTA is operating
 Yellow Flashing	 Yellow Flashing	 Green	The vehicle is departing the lane toward the side which the lane display is flashing

Lane Departure Alert

LDA (Lane Departure Alert)

Basic functions

The LDA system warns the driver if the vehicle may deviate from the current lane or course*1, and also can slightly operate the steering wheel to help avoid deviation from the lane or course*1.

The front camera is used to detect lane lines or a course.*1

■ Lane departure alert function

When the system determines that the vehicle might depart from its lane or course*1, a warning is displayed on a display, and either a warning buzzer will sound or the steering wheel will vibrate to alert the driver.

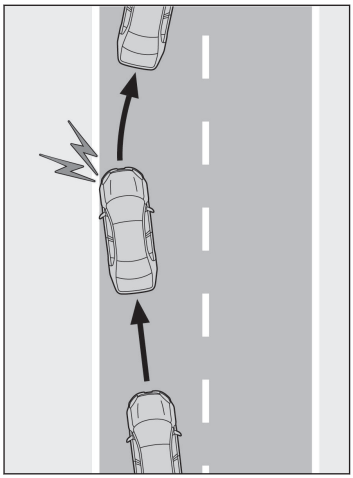

Check the area around your vehicle and carefully operate the steering wheel to move the vehicle back to the center of the lane or course*1.

If the system determines that the vehicle may collide with a vehicle in an adjacent lane, the lane departure alert will operate even if the turn signals are operating.

*1: Boundary between the asphalt and grass, soil, etc., or structures, such as a curb, guardrail, etc.

Lane departure prevention function

If the system determines that the vehicle is likely to depart from its lane or course*1, it provides assistance through steering wheel operations to help avoid deviation from the lane or course.

If the system determines that the steering wheel has not been operated for a certain amount of time or the steering wheel is not being firmly gripped, a warning message may be displayed and a warning buzzer may sound to alert the driver.

If the system determines that the vehicle may collide with a vehicle in an adjacent lane, the lane departure prevention function will operate even if the turn signals are operating.

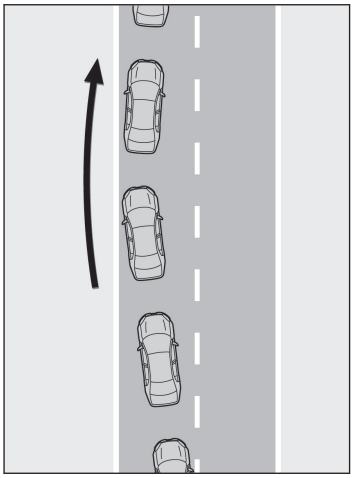

Break suggestion function

If the vehicle is swaying, a message will be displayed and a buzzer will sound to urge the driver to take a break.

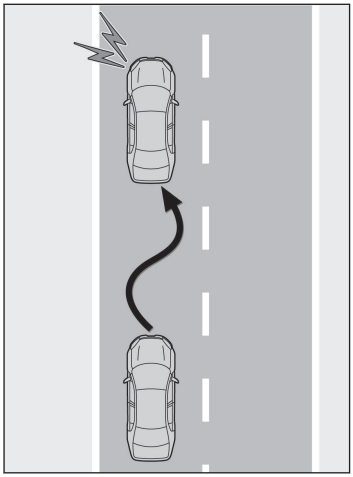

⚠ WARNING

Before using the LDA system

- Do not overly rely on the LDA system. The LDA system is not a system which provides automated assistance in driving. However, as it is not a system which reduces the amount of attention necessary for safe driving. The driver is solely responsible for

*1: Boundary between the asphalt and grass, soil, etc., or structures, such as a curb, guardrail, etc.

⚠ WARNING

paying attention to their surroundings and operating the steering wheel as necessary to ensure safety. Also, the driver is responsible for taking adequate breaks when fatigued, such as when driving for a long time.

- Failure to perform appropriate driving operations and pay careful attention may lead to an accident.

INFORMATION

Operating conditions of each function

- Lane departure alert/prevention function

This function is operable when all of the following conditions are met:

- The vehicle speed is approximately 50 km/h (30 mph) or more.

  Operation may be possible when the vehicle speed is approximately 40 km/h (25 mph) or more if vehicles, motorcycles, bicycles, or pedestrians are detected near the lane.

- The system recognizes a lane or course*1. (When recognized on only one side, the system will operate only for the recognized side.)
- The lane width is approximately 3 m (9.8 ft.) or more.
- The turn signal lever is not being operated.

  (Except when a vehicle is detected in the direction that the turn signal lever is operated.)

- The vehicle is not being driven around a sharp curve.
- The vehicle is not accelerating or decelerating more than a certain amount.
- The steering wheel is not being turned sufficiently to perform a lane change.
- When the VSC or TRC system is not turned off.

Temporary cancellation of functions

When the operating conditions are no longer met, a function may be temporarily canceled. However, when the operation conditions are met again, operation of the function will automatically be restored. (→P.372)

Operation of the lane departure alert function/lane departure prevention function

- Depending on the vehicle speed, road conditions, lane departure angle, etc., operation of the lane departure prevention function may not be felt or the function may not operate.

*1: Boundary between the asphalt and grass, soil, etc., or structures, such as a curb, guardrail, etc.

- Depending on the conditions, the warning buzzer may operate even if vibration is selected through a customize setting.
- If a course*1 is not clear or straight, the lane departure alert function or lane departure prevention function may not operate.
- The lane departure alert function or lane departure prevention function may not operate if the system judges that the vehicle is intentionally being steered to avoid a pedestrian or parked vehicle.
- It may not be possible for the system to judge if there is danger of a collision with a vehicle in an adjacent lane.
- Depending on the driver condition, the lane departure alert function or lane departure prevention function changes the timing of operation.
- The steering assist operation of the lane departure prevention function can be overridden by the steering wheel operation of the driver.

Hands off steering wheel warning operation



In the following situations, a message urging the driver to operate the steering wheel and an icon will be displayed and a buzzer will sound to warn the driver. When using the system, make sure to grip the steering wheel firmly, regardless of whether the warning is operating or not.

When the system determines that the driver is not securely holding the steering wheel, or the steering wheel is not being operated when the steering assist operation of the lane departure prevention function is operating

The length of time that the warning buzzer operates will become longer as the frequency of the steering assist operating increases. Even if the system judges that the steering wheel has been operated, the warning buzzer will sound for a certain amount of time.

Break suggestion function

This function is operable when all of the following conditions are met:

- The vehicle speed is approximately 65km/h (40mph) or more.
- The lane width is approximately 3 m (9.8 ft.) or more.

*1: Boundary between the asphalt and grass, soil, etc., or structures, such as a curb, guardrail, etc.



Depending on the condition of the vehicle and road surface, the break suggestion function may not operate.

Vehicles without a head-up display: Press the meter control switch to turn off the message.

Vehicles with a head-up display: Press the steering switch to turn off the message.

Unless or is pressed, the message of the break suggestion function will remain displayed.

Changing LDA settings

- The LDA system can be enabled/disabled through a customize setting. (→P.684)
- The LDA setting can be changed on the customize settings. (→P.684)
- When the system determines that the driver is tired, the lane departure warning function will operate at the [**Earlier**] timing, regardless of the customized setting. Also, this setting will be kept until the power switch is turned off.

⚠ WARNING

■ Situations in which the system may not operate properly

In the following situations, the system may not operate properly and the vehicle may depart from its lane. Do not overly rely on these functions. The driver is solely responsible for paying attention to their surroundings and operating the steering wheel as necessary to ensure safety.

- When the boundary between the asphalt and grass, soil, etc., or structures, such as a curb, guardrail, etc. is not clear or straight
- When the vehicle is struck by a crosswind or the turbulence of other nearby vehicles
- Situations in which the lane may not be detected : →P.346
- Situations in which the sensors may not operate properly: →P.343
- Situations in which some or all of the functions of the system cannot operate: →P.346
- When it is necessary to disable the system: →P.338

Displays and system operation

The operating state of the lane departure alert function and steering assist operation of the lane departure prevention function are indicated.

Indicator	Lane display	Steering icon	Situation
 Yellow Illuminated	Not illuminated	Not illuminated	System disabled
Not illuminated	 Grey	Not illuminated	Lane lines are not detected by the system
Not illuminated	 White	Not illuminated	Lane lines are detected by the system
 Yellow Flashing	 Yellow Flashing	Not illuminated	Lane departure alert function is operating for the side which the lane display is flashing
 Green	 Green	 Green	Lane departure prevention function is operating for the side which the lane display is illuminated
 Yellow Flashing	 Yellow Flashing	 Green	Lane departure alert function/lane departure prevention function is operating for the side which the lane display is flashing

Road Sign Assist

RSA (Road Sign Assist)

The RSA system detects specific road signs using the front camera and warns the driver via displays and buzzers.

⚠ WARNING

■ For safe use

- Driving safely is solely the responsibility of the driver. Pay careful attention to the surrounding conditions in order to ensure safe driving.
- Do not rely solely upon the RSA. The RSA assists the driver by providing road sign information, but it is not a replacement for the driver's own vision and awareness. Driving safely is solely the responsibility of the driver. Pay careful attention to the surrounding conditions in order to ensure safe driving.

■ Situations in which the RSA should not be used

- When it is necessary to disable the system: →P.338

■ Situations in which the system may not operate properly

- Situations in which the sensors may not operate properly: →P.343

Display Function

- When the front camera detects a sign, the sign will be displayed on the display.
- Multiple signs can be displayed.

  Depending on the specifications of the vehicle, the number of displayed signs may be limited.

INFORMATION

■ Operating conditions of sign display

Signs will be displayed when the following conditions are met:

- The system has detected a sign

In the following situations, a displayed sign may stop being displayed:

- When a new sign has not been detected for a certain distance
- When the system determines that the road being driven on has changed, such as after a left or right turn

Situations in which the display function may not operate properly

In the following situations, the RSA system may not operate properly and may not detect signs or may display the incorrect sign. However, this does not indicate a malfunction.

- When a sign is dirty, faded, tilted or bent
- When the contrast of an electronic sign is low
- When all or part of a sign is hidden by a tree, utility pole, etc.
- When a sign is detected by the front camera for a short amount of time
- When the driving state (turning, changing lanes, etc.) is judged incorrectly
- When a sign is immediately after a freeway junction or in an adjacent lane just before merging
- When stickers are attached to the rear of a preceding vehicle
- When a sign similar to a system compatible sign is detected as a system compatible sign
- When a speed limit sign for a frontage road is within detection range of the front camera
- When driving around a roundabout
- When a sign intended for trucks, etc. is detected
- When a sign is with supplimental sign (End point, day of week, time etc.)
- When a sign is within road works area

Notification function

In the following situations, the RSA system will output a warning to notify the driver.

- If the vehicle speed exceeds the speed warning threshold of the speed limit sign displayed on the display, the sign display will be emphasized and a buzzer will sound.

INFORMATION

Operating conditions of the notification functions

- Excess speed notification function

  This function will operate when the following condition is met:

  - A speed limit road sign is recognized by the system.

Types of road signs supported

- The following types of road signs can be displayed.

However, non-standard or recently introduced traffic signs may not be displayed.

- Speed limit road signs*1



- Speed limit with supplemental mark*2



● Depending on the specifications of the vehicle, signs may be displayed overlapping.

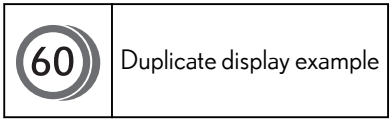

Changing RSA settings

The following settings of the RSA can be changed through customize settings. (→P.684)

*1: No speed limit information (--) is displayed when neither speed limit road sign nor speed limit related information is available.

*2: Displayed simultaneously with a speed limit sign.

Dynamic radar cruise control

Dynamic radar cruise control

This dynamic radar cruise control detects the presence of vehicles ahead, determines the current vehicle-to-vehicle distance, and operates to maintain a suitable distance from the vehicle ahead. The desired vehicle-to-vehicle distance can be set by operating the vehicle-to-vehicle distance switch.

Use the dynamic radar cruise control only on highways and expressways.

⚠ WARNING

For safe use

- Driving safely is solely the responsibility of the driver. Do not overly rely on this system, and pay careful attention to the surrounding conditions in order to ensure safe driving.
- The dynamic radar cruise control provides driving assistance to reduce the driver's burden. However, there are limitations to the assistance provided.

  Read the following items carefully. Do not overly rely on this system and always drive carefully.

  - Conditions under which the system may not operate correctly: →P.383
- Set the speed appropriately according to the speed limit, traffic flow, road conditions, weather conditions, etc. The driver is responsible for confirming the set speed.
- Even if the system is operating correctly, the condition of a preceding vehicle as recognized by the driver and detected by the system may differ. Therefore, it is necessary for the driver to pay attention, assess risks, and ensure safety. Over-reliance on this system to drive the vehicle safely may lead to an accident resulting in death or serious injury.

Precautions for the driving assist systems

Observe the following precautions, as there are limitations to the assistance provided by the system. Over-reliance on this system may lead to an accident resulting in death or serious injury.

- Details of support provided for the driver's vision

  The dynamic radar cruise control is only intended to help the driver in determining the distance between the driver's own vehicle and a designated preceding vehicle. It is not a system which allows for careless or inattentive driving, and is not a system which assists in poor visibility conditions.

  The driver must pay attention to their surroundings, even when the vehicle stops.
- Details of support provided for the driver's judgement

⚠ WARNING

The dynamic radar cruise control determines whether the distance between the driver's own vehicle and a designated preceding vehicle is within a set range. It is not capable of making any other type of judgement. Therefore, it is absolutely necessary for the driver to remain vigilant and to determine whether or not there is a possibility of danger.

- Details of support provided for the driver's operation

  The dynamic radar cruise control does not include functions which will prevent or avoid collisions with vehicles ahead of your vehicle. Therefore, if there is ever any possibility of danger, the driver must take immediate and direct control of the vehicle and act appropriately in order to ensure safety.

■ Situations in which the dynamic radar cruise control should not be used

Do not use the dynamic radar cruise control in the following situations. As the system will not be able to provide appropriate control, using it may lead to an accident resulting in death or serious injury.

- Roads where there are pedestrians, cyclists, etc.
- When driving on a highway or expressway entrance or exit
- When the approach warning sounds frequently
- Situations in which the sensors may not operate properly: →P.343
- Situations in which the lane may not be detected: →P.346

Basic functions

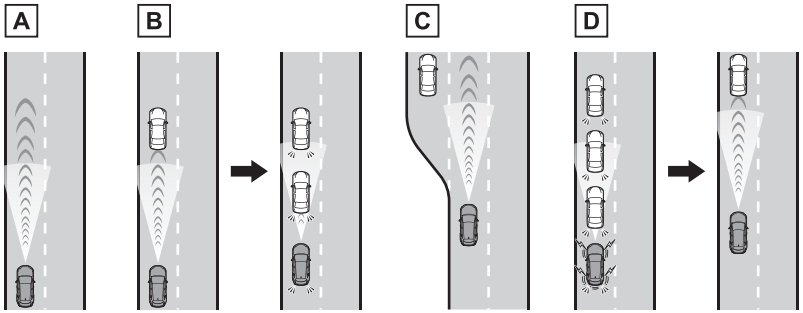

A Constant speed cruising:

When there are no vehicles ahead

The vehicle drives at the speed set by the driver.

If the set vehicle speed is exceeded while driving down a hill, the set vehicle speed display will blink and a buzzer will sound.

B Deceleration and follow-up cruising:

When a preceding vehicle driving slower than the set vehicle speed is detected

When a vehicle is detected driving ahead of your vehicle, the vehicle automatically decelerates and if a greater reduction in vehicle speed is necessary, the brakes are applied (the stop lights will come on at this time). The vehicle is controlled to maintain the vehicle-to-vehicle distance set by the driver, in accordance with changes in the speed of the preceding vehicle. If vehicle deceleration is not sufficient and the vehicle approaches the vehicle ahead, the approach warning will sound.

C Acceleration:

When there are no longer any preceding vehicles driving slower than the set vehicle speed

The vehicle accelerates until the set vehicle speed is reached and then resumes constant speed cruising.

D Starting off:

If a preceding vehicle stops, the vehicle will also stop (controlled stop). After the preceding vehicle starts off, pressing the [RES] switch or depressing the accelerator pedal will resume follow-up cruising (start off operation). If a start off operation is not performed, the controlled stop will continue.

System components

Meter display

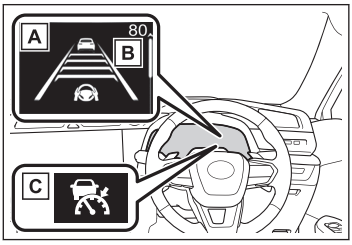

A Multi-information display
B Set vehicle speed
C Indicator

Switches

Vehicles without a head-up display

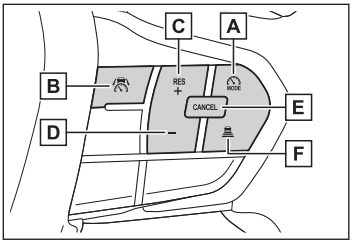

A Driving assist mode select switch
B Driving assist switch
C [+] switch/[RES] switch
D [-] switch
E Cancel switch
F Vehicle-to-vehicle distance switch

Vehicles with a head-up display

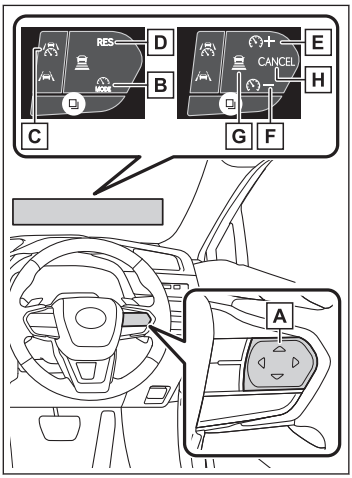

A The function of each switch differs depending on the conditions and settings.

When a switch is touched, the function of each switch is displayed on the head-up display. If the head-up display is off, the functions will be displayed on the multi-information display.

B Driving assist mode select switch
C Driving assist switch
D [RES] switch
E [+] switch
F [-] switch
G Vehicle-to-vehicle distance switch
H Cancel switch

Using the dynamic radar cruise control

Setting the vehicle speed

1 Press the driving assist mode select switch to select dynamic radar cruise control.

The dynamic radar cruise control indicator will illuminate.

▶ **Vehicles without a head-up display**

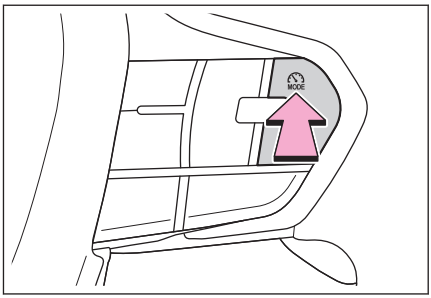

▶ **Vehicles with a head-up display**

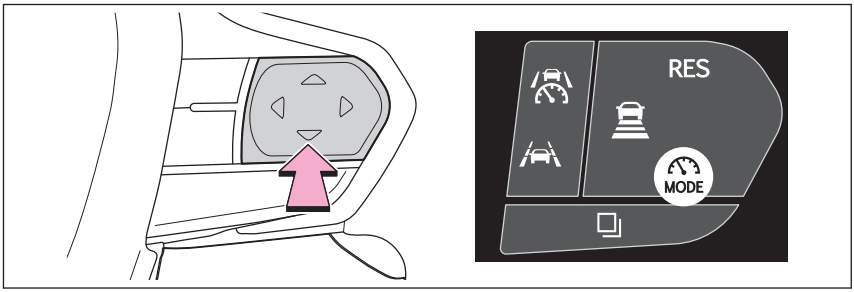

2 Using the accelerator pedal, accelerate or decelerate to the desired vehicle speed (approximately 30 km/h [20 mph] or more), and press the driving assist switch to set the set vehicle speed.

The set vehicle speed will be displayed on the multi-information display.

The vehicle speed at the moment the switch is released will be the set vehicle speed.

▶ **Vehicles without a head-up display**

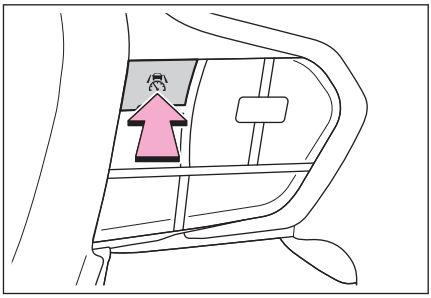

▶ **Vehicles with a head-up display**

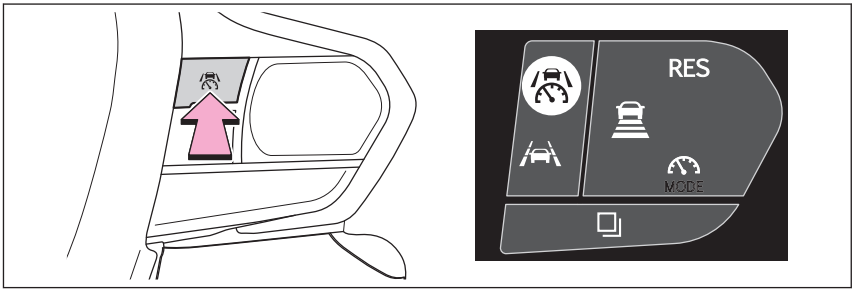

Adjusting the set vehicle speed

● Adjusting the set vehicle speed using the switches

To change the set vehicle speed, press the [+] switch or [-] switch until the desired speed is displayed.

▶ **Vehicles without a head-up display**

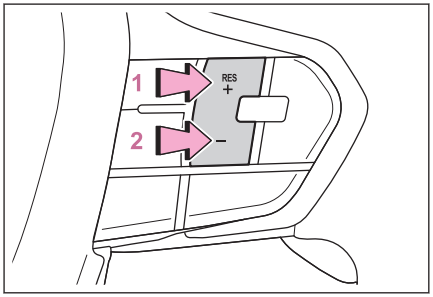

▶ **Vehicles with a head-up display**

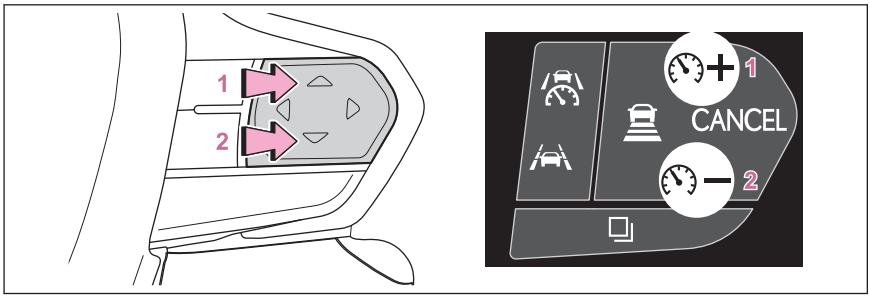

1 Increase set vehicle speed

2 Decrease set vehicle speed

Short press adjustment: Press the switch

Long press adjustment: Press and hold the switch until the desired set vehicle speed is reached.

The set vehicle speed will increase or decrease as follows:

Short press adjustment: By 1 km/h (0.6 mph) or 1 mph (1.6 km/h) each time the switch is pressed

Long press adjustment: Increases or decreases in 5 km/h (3.1 mph) or 5 mph (8 km/h) increments continuously while the switch is pressed and held

The set vehicle speed adjustment increment can be changed through a customize setting.

● Increasing the set vehicle speed using the accelerator pedal

1 **Depress the accelerator pedal to accelerate the vehicle to the desired vehicle speed.**

2 **Press the [+] switch.**

Canceling/resuming control

▶ **Vehicles without a head-up display**

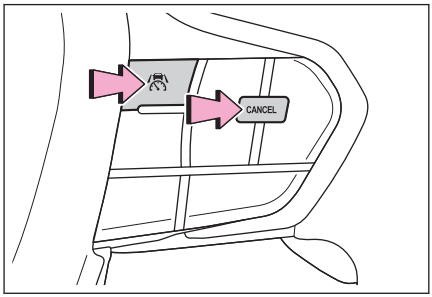

▶ **Vehicles with a head-up display**

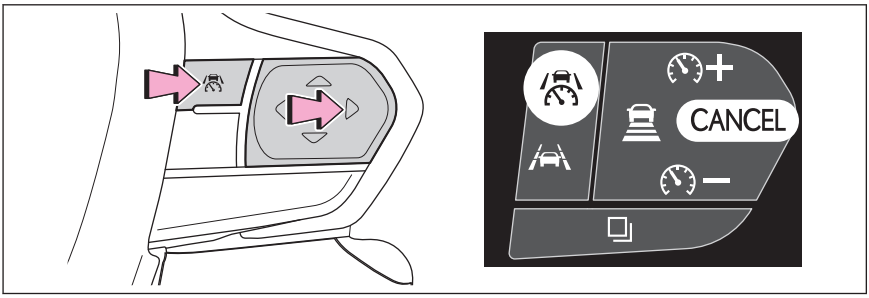

1 **Press the cancel switch or driving assist switch to cancel control.**

Control will also be canceled if the brake pedal is depressed.

(If the vehicle has been stopped by system control, depressing the brake pedal will not cancel control.)

2 **Press the [RES] switch to resume control.**

Changing the vehicle-to-vehicle distance

Each time the switch is pressed, the vehicle-to-vehicle distance setting will change as follows:

If a preceding vehicle is detected, the preceding vehicle mark will be displayed.

▶ **Vehicles without a head-up display**

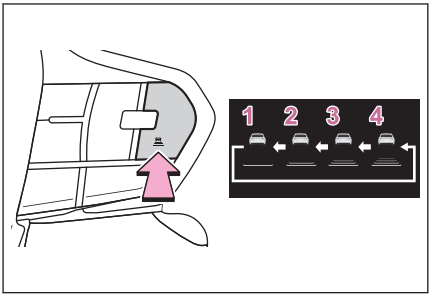

▶ **Vehicles with a head-up display**

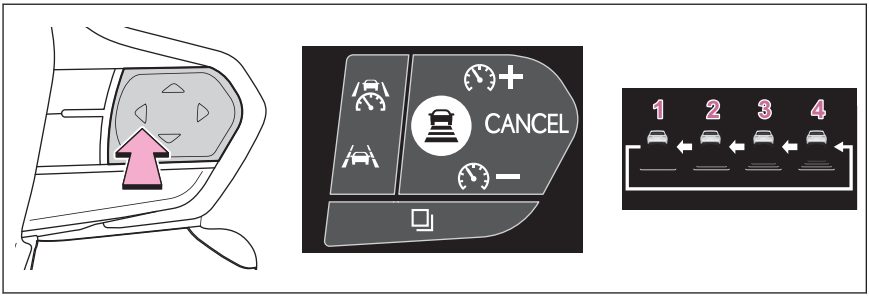

Illustration Number	Vehicle-to-vehicle distance	Approximate Distance (Vehicle Speed: 100 km/h [60 mph])
1	Short	Approximately 30 m (100 ft.)
2	Medium	Approximately 45 m (145 ft.)
3	Long	Approximately 60 m (200 ft.)
4	Extra long	Approximately 70 m (230 ft.)

The actual vehicle-to-vehicle distance varies in accordance with the vehicle speed. Also, when the vehicle is stopped by system control, it will be stopped at a certain distance from the preceding vehicle, depending on the situation, regardless of the setting.

INFORMATION

Operating conditions

- The shift position is in D.
- The desired set speed can be set when the vehicle speed is approximately 30 km/h (20 mph) or more.
  - If the vehicle speed is set while driving at below approximately 30 km/h (20 mph), the set vehicle speed will be approximately 30 km/h (20 mph).
  - If the vehicle speed is set while driving at a speed that exceeds the system's upper limit, the set vehicle speed will be the system's upper limit.

Accelerating after setting the vehicle speed

As with normal driving, acceleration can be performed by depressing the accelerator pedal. After accelerating, the vehicle will return to the set vehicle speed. However, while in vehicle-to-vehicle distance control mode, the vehicle speed may decrease to below the set vehicle speed in order to maintain the distance from the preceding vehicle.

When the vehicle is stopped by system control during follow-up cruising

- When the [RES] switch is pressed while the vehicle is stopped by system control, if the preceding vehicle starts off within approximately 3 seconds, follow-up cruising will resume.
- If the preceding vehicle starts off within approximately 3 seconds of the vehicle being stopped by system control, follow-up cruising will resume.

Automatic cancellation of vehicle-to-vehicle distance control mode

In the following situations, vehicle-to-vehicle distance control mode will be canceled automatically:

- When the brake control or output restriction control of a driving support system operates(For example: Pre-Collision System, drive-start control)

- When the parking brake has been operated
- When the vehicle is stopped by system control on a steep incline
- When any of the following are detected while the vehicle is stopped by system control:
  - The driver's seat belt is unfastened
  - The driver's door is opened
  - Approximately 3 minutes have elapsed since the vehicle was stopped

The parking brake may be activated automatically.

- Situations in which some or all of the functions of the system cannot operate: →P.346

■ Dynamic radar cruise control system warning messages and buzzers

For safe use: →P.338

■ Preceding vehicles that the sensor may not detect correctly

In the following situations, depending on the conditions, if the system cannot provide sufficient deceleration or acceleration is necessary, operate the brake pedal or accelerator pedal.

As the sensor may not be able to correctly detect these types of vehicles, the approach warning (→P.388) may not operate.

- When a vehicle cuts in front of your vehicle or changes lanes away from your vehicle extremely slowly or quickly
- When changing lanes
- When a preceding vehicle is driving at a low speed
- When a vehicle is stopped in the same lane as the vehicle
- When a motorcycle is traveling in the same lane as the vehicle

■ Conditions under which the system may not operate correctly

In the following situations, operate the brake pedal (or accelerator pedal, depending on the situation) as necessary.

As the sensor may not be able to correctly detect a vehicle, the system may not operate properly.

- When a preceding vehicle brakes suddenly
- When changing lanes at low speeds, such as in a traffic jam

Approach warning

In situations where the vehicle approaches a preceding vehicle and the system cannot provide sufficient deceleration, such as if a vehicle cuts in front of the

vehicle, a warning display will flash and a buzzer will sound to alert the driver. Depress the brake pedal to ensure appropriate vehicle-to-vehicle distance.

Warnings may not occur when

In the following situations, the warning may not operate even though the vehicle-to-vehicle distance is short.

- When the preceding vehicle is traveling at the same speed or faster than your vehicle
- When the preceding vehicle is traveling at an extremely low speed
- Immediately after the vehicle speed has been set
- When the accelerator pedal is depressed

Curve speed reduction function



When a curve is detected, the vehicle speed will begin being reduced. When the curve ends, the vehicle speed reduction will end.

Depending on the situation, the vehicle speed will then return to the set vehicle speed.

In situations where vehicle-to-vehicle distance control needs to operate, such as when a preceding vehicle cuts in front of your vehicle, the curve speed reduction function will be canceled.

INFORMATION

Situations in which the curve speed reduction function may not operate

In situations such as the following, the curve speed reduction function may not operate:

- When the vehicle is being driven around a gentle curve
- When the accelerator pedal is being depressed
- When the vehicle is being driven around an extremely short curve

Driver Monitor support function

While a warning of the driver monitor is being displayed, the vehicle acceleration will be restrained.

When the warning of the driver monitor disappears, the restrained acceleration control will end.

Support for lane change

If your vehicle is being driven at approximately 80 km/h (50 mph) or more and a lane change to the passing lane is performed, when the turn signal lever is operated and the lane is changed, the vehicle will accelerate up to the set speed to assist in overtaking.

The system's recognition of which lane is the passing lane may be based solely on the location of the steering wheel in the vehicle (left-hand drive/right-hand drive). If the vehicle is driven in a location where the passing lane is on the opposite side of that where the vehicle was originally sold, the vehicle may accelerate when the turn signal lever is operated away from the passing lane. (e.g. The vehicle was manufactured for a right-hand traffic location, but is being driven in a left-hand traffic location. The vehicle may accelerate when the turn signal lever is operated to the right.)

If your vehicle is being driven at approximately 80 km/h (50 mph) or more and the lane is changed to that with a vehicle traveling slower than your vehicle, when the turn signal lever is operated the vehicle will gradually decelerate to assist in changing lanes.

Dynamic Radar Cruise Control with Road Sign Assist

When RSA function is enabled and the dynamic radar cruise control system is operating, if a speed limit sign is detected, the detected speed limit will be displayed with an up/down arrow. The set speed can be increased/reduced to the detected speed limit by pressing and holding the [+] switch or [-] switch.

When the set speed is lower than the detected speed limit

▶ **Vehicles without a head-up display**

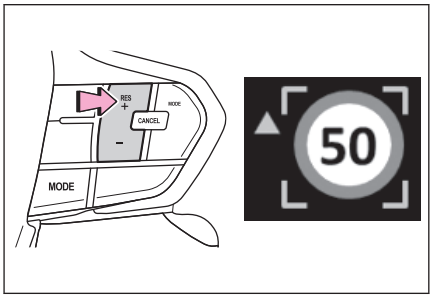

Press and hold the [+] switch.

▶ **Vehicles with a head-up display**

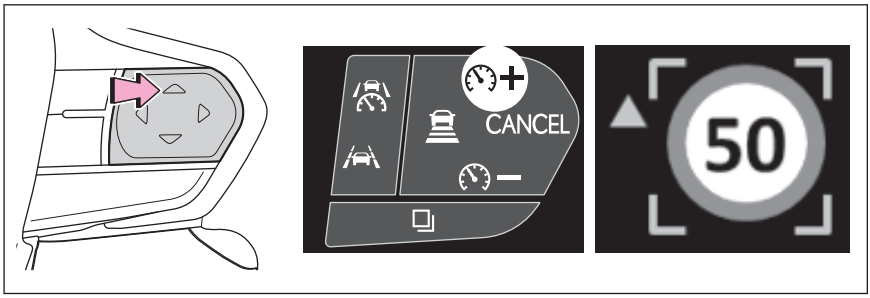

Press and hold the [+] switch.

When the set speed is higher than the detected speed limit

▶ **Vehicles without a head-up display**

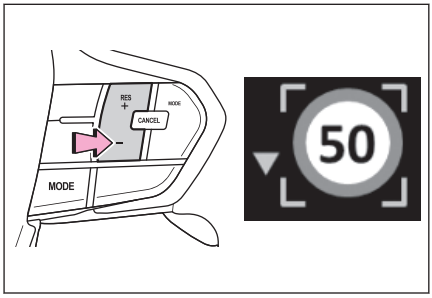

Press and hold the [-] switch.

▶ **Vehicles with a head-up display**

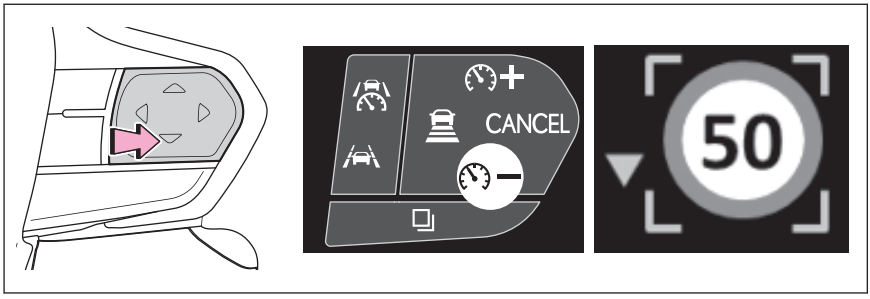

Press and hold the [-] switch.

INFORMATION

The dynamic radar cruise control with road sign assist may not operate properly when

As the dynamic radar cruise control with road sign assist may not operate properly in situations where the RSA may not operate or cannot detect signs correctly (→P.377), when using this function, make sure to confirm the actual speed limit.

In the following situations, the set speed may not change to the detected speed limit by pressing and holding the [+] switch or [-] switch:

- When speed limit information is not available
- When the detected speed limit is the same as the set speed
- When the detected speed limit is outside of the speed range which the dynamic radar cruise control system can operate

Changing Dynamic radar cruise control settings

- The settings of Dynamic radar cruise control can be changed through customize settings. (→P.684)

Display and system operation state

The operating state of Dynamic radar cruise control is indicated.

Indicator	Multi-information display		Situation
 White		Vehicle-to-vehicle distance setting: Gray	Dynamic radar cruise control being OFF
 Green		Vehicle-to-vehicle distance setting: Blue Set vehicle speed: Green	Constant speed cruising

Indicator	Multi-information display		Situation
Green		Vehicle-to-vehicle distance setting: Blue Set vehicle speed: Green Preceding vehicle: White	Follow-up cruising
Green	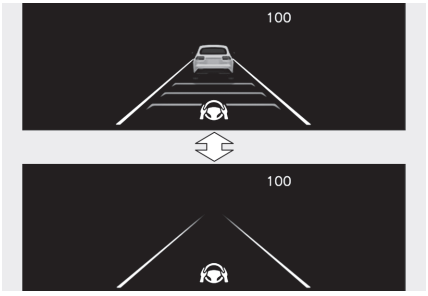	Vehicle-to-vehicle distance setting: Orange flashing Set vehicle speed: Green Preceding vehicle: Orange flashing	Approach warning
Green		Vehicle-to-vehicle distance setting: Gray Set vehicle speed: White Preceding vehicle: Gray	Accelerating with the accelerator pedal
Green	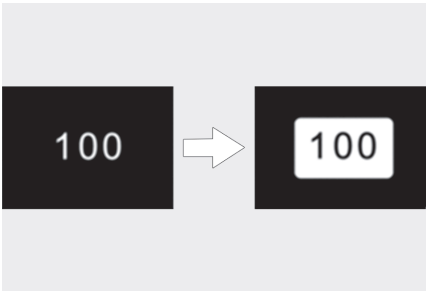	Set vehicle speed: Green in reverse display	Set vehicle speed being exceeded

Cruise Control

Cruise control

The vehicle can be driven at a set speed even if the accelerator pedal is not depressed.

Use the cruise control only on highways and expressways.

⚠ WARNING

■ For safe use

- Driving safely is solely the responsibility of the driver. Therefore, do not overly rely on this system. The driver is solely responsible for paying attention to the vehicle's surroundings and driving safely.
- Set the speed appropriately according to the speed limit, traffic flow, road conditions, weather conditions, etc. The driver is responsible for confirming the set speed.

■ Situations in which cruise control should not be used

Do not use the cruise control in the following situations. As the system will not be able to provide appropriate control, using it may lead to an accident resulting in death or serious injury.

- On roads with sharp bends
- On winding roads
- On slippery roads, such as those covered with rain, ice or snow
- On steep downhills, or where there are sudden changes between sharp up and down gradients

  Vehicle speed may exceed the set speed when driving down a steep hill.
- When it is necessary to disable the system: →P.338

System Components

■ Meter display

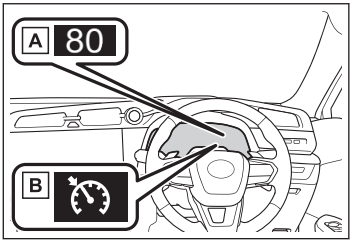

A Set vehicle speed

B Cruise control indicator

Switches

▶ Vehicles without a head-up display:

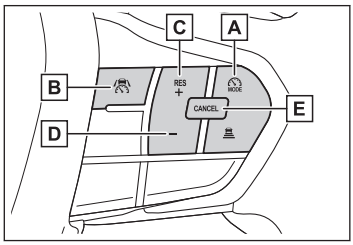

A Driving assist mode select switch
B Driving assist switch
C [+] switch, [RES] switch
D [-] switch
E Cancel switch

▶ Vehicles with a head-up display:

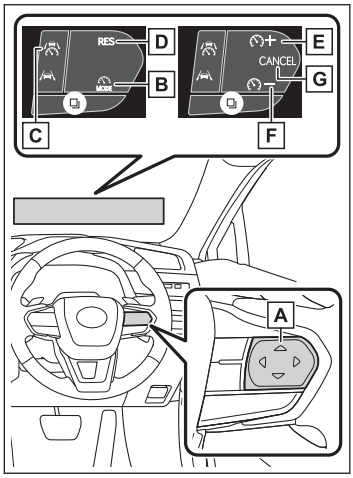

A The function of each switch differs depending on the conditions and settings.

When a switch is touched, the function of each switch is displayed on the head-up display. If the head-up display is off, the functions will be displayed on the multi-information display.

B Driving assist mode select switch
C Driving assist switch
D [RES] switch
E [+] switch
F [-] switch
G Cancel switch

Using the cruise control

Setting the vehicle speed

1 **Press the driving assist mode select switch to select cruise control.**

The cruise control indicator will illuminate.

▶ **Vehicles without a head-up display**

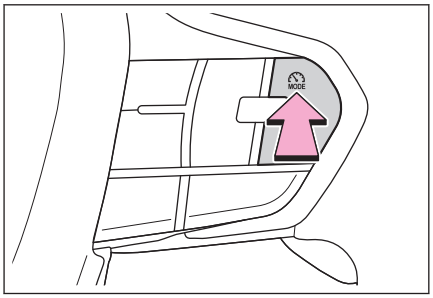

▶ **Vehicles with a head-up display**

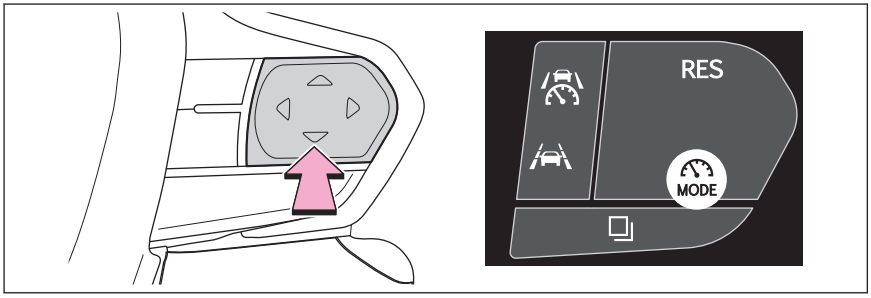

2 **Using the accelerator pedal, accelerate to the desired vehicle speed (approximately 30 km/h [20 mph] or more), and press the driving assist switch to set the set vehicle speed.**

The vehicle speed at the moment the switch is released will be the set vehicle speed.

▶ **Vehicles without a head-up display**

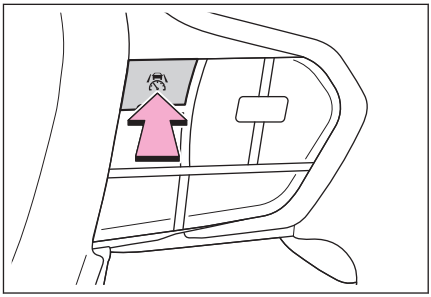

▶ **Vehicles with a head-up display**

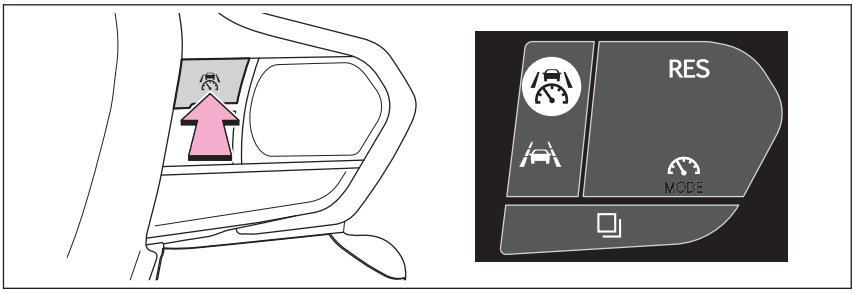

Adjusting the set vehicle speed

● Adjusting the set vehicle speed using the switches

To change the set vehicle speed, press the [+] switch or [-] switch until the desired speed is displayed.

▶ **Vehicles without a head-up display**

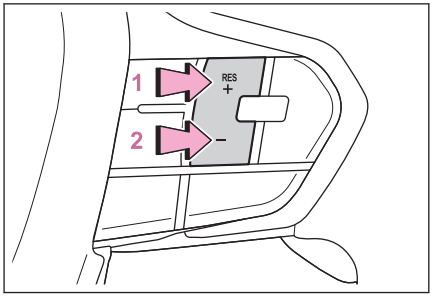

1 Increase set vehicle speed

2 Decrease set vehicle speed

▶ **Vehicles with a head-up display**

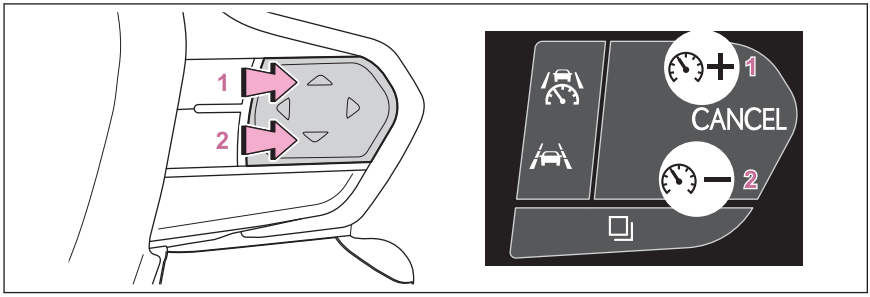

1 Increase set vehicle speed

2 Decrease set vehicle speed

The set vehicle speed will increase or decrease as follows:

Fine adjustment: By 1 km/h (0.6 mph) or 1 mph (1.6 km/h) each time the switch is pressed

Large adjustment: Increases continuously while the switch is pressed and held

● Increasing the set vehicle speed using the accelerator pedal

1 Depress the accelerator pedal to accelerate the vehicle to the desired vehicle speed.

2 Press the [+] switch.

Canceling/resuming control

1 Press the cancel switch or driving assist switch to cancel control.

Control will also be canceled if the brake pedal is depressed.

▶ **Vehicles without a head-up display**

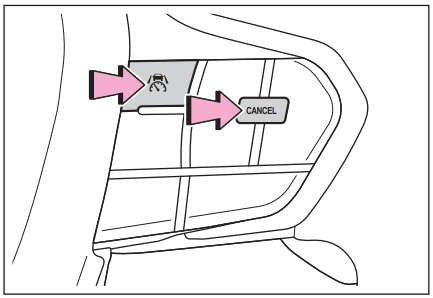

▶ **Vehicles with a head-up display**

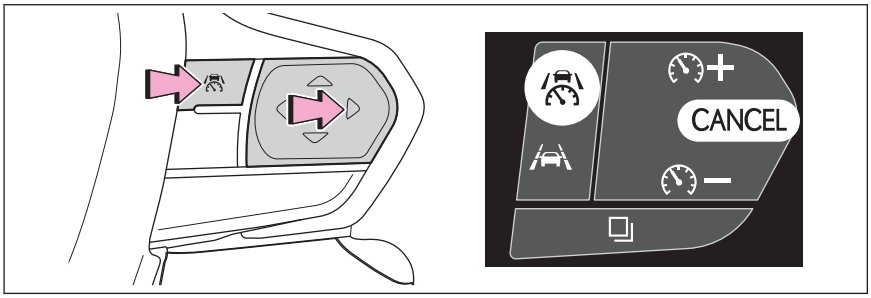

2 Press the [RES] switch to resume control.

INFORMATION

■ Automatic cancellation of the cruise control

In the following situations, the cruise control will be canceled automatically:

- When the vehicle speed drops approximately 16 km/h (10 mph) or more below the set vehicle speed
- When the vehicle speed drops below approximately 30 km/h (20 mph)
- When the brake control or output restriction control of a driving support system operates (For example: PCS, drive-start control)
- When the parking brake has been operated
- Situations in which some or all of the functions of the system cannot operate: →P.346

Display and system operation state

The operating state of cruise control is indicated.

Indicator	Multi-information display		Situation
White		Blank	Cruise control being OFF
Green		Set vehicle speed: Green	Constant speed cruising
Green	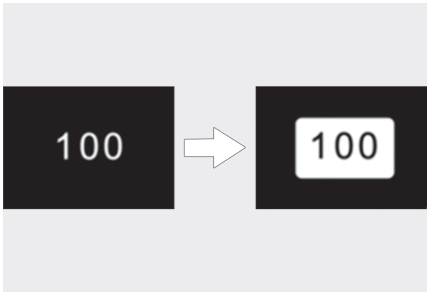	Set vehicle speed: Green in reverse display	Set vehicle speed being exceeded

Emergency Driving Stop System

Emergency Driving Stop System

The emergency driving stop system is a system which automatically decelerates and stops the vehicle within its lane if the driver becomes unable to continue driving the vehicle, such as if they have suffered a medical emergency, etc.

During LTA (Lane Tracing Assist) control, if the system does not detect driving operations, such as if the driver is not holding the steering wheel, and determines the driver is not responsive, the vehicle will be decelerated and stopped within its current lane to help avoid a collision or reduce the impact of a collision.

⚠ WARNING

■ For safe use

- Driving safely is solely the responsibility of the driver. Pay careful attention to the surrounding conditions in order to ensure safe driving. The emergency driving stop system is designed to provide support in an emergency where it is difficult for the driver to continue driving, such as if they have had a medical emergency. It is not designed to support driving while drowsy or in poor physical health, or inattentive driving.
- Although the emergency driving stop system is designed to decelerate the vehicle within its lane to help avoid or help reduce the impact of a collision if the system determines that it is difficult for the driver to continue driving, its effectiveness may change according to various conditions. Therefore, it may not always be able to achieve the same level of performance. Also, if the operating conditions are not met, this function will not operate.
- After the emergency driving stop system operates, if driving becomes possible again, immediately begin driving again or, if necessary, park the vehicle on the shoulder of the road and set a warning reflector and flare to warn other drivers of your stopped vehicle.
- After this system operates, passengers should attend to the driver as necessary and take appropriate hazard prevention measures, such as moving to a place where safety can be ensured, such as the shoulder of the road or behind a guardrail.
- This system detects the condition of the driver through the operation of the steering wheel. This system may operate if the driver is aware but intentionally and continuously does not operate the vehicle. Also, the system may not operate if it cannot determine that the driver is not responsive, such as if they are leaning on the steering wheel.
- Situations in which the driver monitor may not operate properly :→P.346

Summary of the system

Operation of this system is separated into 4 control states. Through control state "Warning phase 1" and "Warning phase 2", the system determines if the driver is aware and responsive while outputting a warning and controlling the vehicle speed. If the system determines the driver is not responsive, it will operate in control state "Deceleration stop phase" and "Stop hold phase" and decelerate and stop the vehicle. It will then operate continuously in "Stop hold phase".

INFORMATION

Operating conditions

This system operates when all of the following conditions are met:

- When the LTA is on
- When the vehicle speed is approximately 50 km/h (30 mph) or more

Operation cancelation conditions

In the following situations, system operation will be canceled:

- When LTA control has been canceled (the LTA switch has been pressed, etc.)
- When the dynamic radar cruise control has been canceled
- When driver operations are detected (the steering wheel is held, the brake pedal, accelerator pedal, parking brake, hazard light switch, or turn signal lever is operated)
- When the driving assist switch is pressed while in the stop and hold phase
- When the power switch has been turned from ON to OFF
- Situations in which some or all of the functions of the system cannot operate: →P.346

LTA control when operation is canceled

When emergency driving stop system operation is canceled, LTA control may also be canceled.

Warning phase 1

If driving operations are not detected after the hands off steering wheel warning operates, a buzzer will sound intermittently and a message will be displayed to warn the driver, and the system will judge if the driver is responsive or not. If driving operations, such as holding the steering wheel, are not performed within a certain amount of time, the system will enter warning phase 2.

Depending on the type of detection of the driver's unresponsiveness, the system may skip warning phase 1 and start the control of warning phase 2.

Warning phase 2

After entering warning phase 2, a buzzer will sound in short intervals and a message will be displayed to warn the driver, and the vehicle will slowly decelerate. If driving operations, such as holding the steering wheel, are not performed within a certain amount of time, the system will determine that the driver is not responsive and enter the deceleration stop phase.

The audio system will be muted until the driver becomes responsive.

When the vehicle is decelerating, the brake lights may illuminate, depending on the road conditions, etc.

After the vehicle has decelerated a certain amount, the emergency flashers (hazard lights) will flash.

Deceleration stop phase

After the driver is judged as being not responsive, a buzzer will sound continuously and a message will be displayed to warn the driver, and the vehicle will slowly decelerate and stop. While the vehicle is decelerating, the emergency flashers (hazard lights) will flash to warn other drivers of the emergency.

Stop hold phase

After the vehicle is stopped, the parking brake will be applied automatically. After entering the stop and hold phase, the buzzer will continue sounding continuously, the emergency flashers (hazard lights) will flash to warn other drivers of the emergency, and the doors will unlock.

INFORMATION

Restricted functions after the operation is canceled

After shifting to the deceleration stop phase, the following functions will not be available until the EV system is re-started even though the emergency driving stop system is canceled:

- LTA

Blind Spot Monitor

The Blind Spot Monitor is a system that uses rear side radar sensors installed on the inner side of the rear bumper on the left and right side to assist the driver in confirming safety when changing lanes.

⚠ WARNING

■ Cautions regarding the use of the system

- The driver is solely responsible for safe driving. Always drive safely, taking care to observe your surroundings.
- The Blind Spot Monitor is a supplementary function which alerts the driver that a vehicle is in a blind spot of the outside rear view mirrors or is approaching rapidly from behind into a blind spot. Do not overly rely on the Blind Spot Monitor. As the function cannot judge if it is safe to change lanes, over reliance could lead to an accident resulting in death or serious injury. As the system may not function correctly under certain conditions, the driver's own visual confirmation of safety is necessary.

System components

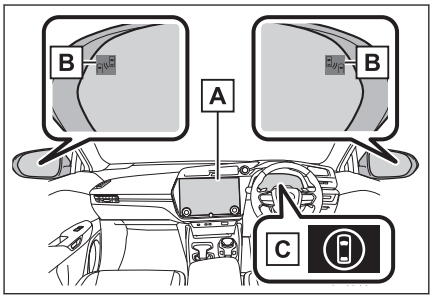

A Center Display

Turning the Blind Spot Monitor on/off.

B Outside rear view mirror indicators

When a vehicle is detected in a blind spot of the outside rear view mirrors or approaching rapidly from behind into a blind spot, the outside rear view mirror indicator (→P.301) on the detected side will illuminate. If the turn signal lever is operated toward the detected side, the outside rear view mirror indicator will flash and a buzzer will sound.

C Driving assist information indicator

Illuminates when the Blind Spot Monitor is turned off. At this time, a message will be displayed on the multi-information display.

INFORMATION

Outside rear view mirror indicator visibility

In strong sunlight, the outside rear view mirror indicator may be difficult to see.

Buzzer

If the volume setting of the audio system is high or the surrounding area is loud, it may be difficult to hear the buzzer.

Customization

Some functions can be customized. (→P.685)

WARNING

To ensure the system can operate properly

Blind spot monitor sensors are installed behind the left and right sides of the rear bumper respectively. Observe the following to ensure the blind spot monitor can operate correctly.



- Keep the sensors and the surrounding areas on the rear bumper clean at all times.

  If a sensor or its surrounding area on the rear bumper is dirty or covered with snow, the Blind Spot Monitor may not operate and a warning message will be displayed. In this situation, clear off the dirt or snow and drive the vehicle with the operation conditions of the BSM function (→P.403) satisfied for approximately 10 minutes. If the warning message does not disappear, have the vehicle inspected by your Lexus dealer.

- Do not attach accessories, stickers (including transparent stickers), aluminum tape, etc. to a sensor or its surrounding area on the rear bumper.
- Do not paint the surrounding area of a sensor on the rear bumper.
- Do not subject a sensor or its surrounding area on the rear bumper to a strong impact.

  If a sensor is moved even slightly off position, the system may malfunction and vehicles may not be detected correctly. In the following situations, have your vehicle inspected by your Lexus dealer.

  - A sensor or its surrounding area is subject to a strong impact.
  - If the surrounding area of a sensor is scratched or dented, or part of them has become disconnected.

- Do not disassemble the sensor.
- Do not modify the sensor or surrounding area on the rear bumper.

⚠ WARNING

- If a sensor or the rear bumper needs to be removed/installed or replaced, contact your Lexus dealer.
- The sensors are likely to be affected by paint on the rear bumper. If the rear bumper is not repaired correctly, the Blind Spot Monitor may not operate with a warning message displayed. If any paint repair is needed, contact your Lexus dealer.

Turning the Blind Spot Monitor on/off

The Blind Spot Monitor can be enabled/disabled through a customize setting. (→P.685)

When the Blind Spot Monitor is off, the driving assist information indicator (→P.301) will illuminate and a message will be displayed on the multi-information display.

Each time the power switch is turned to ON, the Blind Spot Monitor is enabled.

Blind Spot Monitor Operation

Objects that can be detected while driving

The Blind Spot Monitor uses rear side radar sensors to detect the following vehicles traveling in adjacent lanes and advises the driver of the presence of such vehicles via the indicators on the outside rear view mirrors.

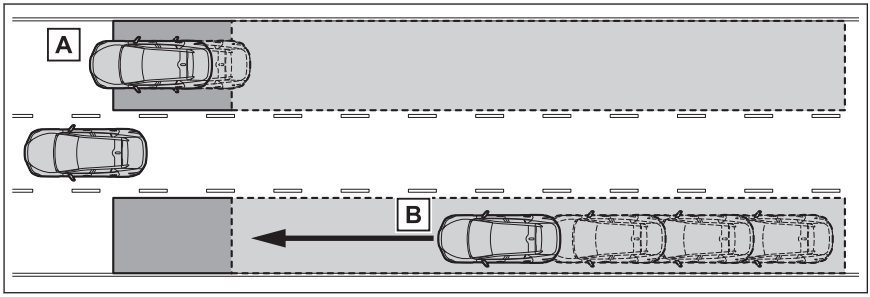

A Vehicles that are traveling in areas that are not visible using the outside rear view mirrors (the blind spots)

B Vehicles that are approaching rapidly from behind in areas that are not visible using the outside rear view mirrors (the blind spots)

Detection range while driving

The areas that vehicles can be detected in are outlined below.

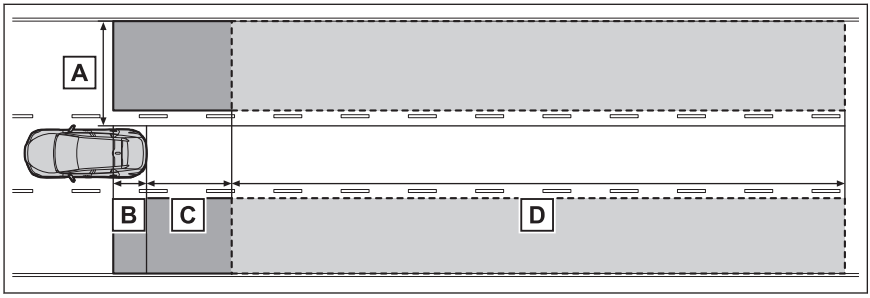

The range of each detection area is:

A Approximately 0.5 m (1.6 ft.) to 3.5 m (11.5 ft.) from either side of the vehicle*1

B Approximately 1 m (3.3 ft.) forward of the rear bumper*2

C Approximately 3 m (9.8 ft.) from the rear bumper

D Approximately 3 m (9.8 ft.) to 70 m (230 ft.) from the rear bumper*3

The Blind Spot Monitor linked function

The LDA (Lane Departure Alert) has a function that uses information of detected vehicles driving in an adjacent lane. For details about the function and its operating conditions,P.370.

INFORMATION

The Blind Spot Monitor is operational when

The Blind Spot Monitor is operational when all of the following conditions are met:

- The power switch is in ON.
- The Blind Spot Monitor is on.
- The shift position is in a position other than R.
- The vehicle speed is approximately 10 km/h (7 mph) or more.

The Blind Spot Monitor will detect a vehicle when

The Blind Spot Monitor will detect a vehicle present in the detection area in the following situations:

- A vehicle in an adjacent lane overtakes your vehicle.

*1: The area between the side of the vehicle and 0.5 m (1.6 ft.) from the side of the vehicle cannot be detected.

*2: While the vehicle is to being overtaken, up to approximately 3 m (9.8 ft.) forward of the rear bumper will be detected.

*3: The greater the difference in speed between your vehicle and the detected vehicle is, the farther away the vehicle will be detected, causing the outside rear view mirror indicator to illuminate or flash.

- You overtake a vehicle in an adjacent lane slowly.
- Another vehicle enters the detection area when it changes lanes.

Situations in which the Blind Spot Monitor cannot detect vehicles.

The Blind Spot Monitor cannot detect the following vehicles and other objects:

- Small motorcycles, bicycles, pedestrians, etc. *1
- Vehicles traveling in the opposite direction
- Guardrails, walls, signs, parked vehicles and similar stationary objects *1
- Following vehicles that are in the same lane *1
- Vehicles traveling 2 lanes away from your vehicle *1
- Vehicles which are being overtaken rapidly by your vehicle *1

Conditions in which a buzzer may not sound

In situations such as the following, while the turn signal lever is being operated, the indicator will flash but a buzzer may not sound:

- When a second vehicle is detected while the turn signal lever is being held
- When overtaking a vehicle in the adjacent lane at a much higher speed than it *2

Conditions under which the system may not function correctly

- The Blind Spot Monitor may not detect vehicles correctly in the following situations:
  - When the sensor is misaligned due to a strong impact to the sensor or its surrounding area
  - When mud, snow, ice, a sticker, etc, is covering the sensor or surrounding area on the rear bumper
  - When driving on a road surface that is wet with standing water during bad weather, such as heavy rain, snow, or fog
  - When multiple vehicles are approaching with only a small gap between each vehicle
  - When the distance between your vehicle and a following vehicle is short
  - When there is a significant difference in speed between your vehicle and the vehicle that enters the detection area
  - When the difference in speed between your vehicle and another vehicle is changing
  - When a vehicle enters a detection area traveling at about the same speed as your vehicle

*1: Depending on the conditions, detection of a vehicle and/or object may occur.

*2: Depending on the situations, a buzzer may sound.

- As your vehicle starts from a stop, a vehicle remains in the detection area
- When driving up and down consecutive steep inclines, such as hills, dips in the road, etc.
- When driving on roads with sharp bends, consecutive curves, or uneven surfaces
- When vehicle lanes are wide, or when driving on the edge of a lane, and the vehicle in an adjacent lane is far away from your vehicle
- When an accessory (such as a bicycle carrier) is installed to the rear of the vehicle
- When there is a significant difference in height between your vehicle and the vehicle that enters the detection area
- Immediately after the Blind Spot Monitor is turned on
- When towing with the vehicle

● Instances of the Blind Spot Monitor unnecessarily detecting a vehicle and/or object may increase in the following situations:

- When the sensor is misaligned due to a strong impact to the sensor or its surrounding area
- When the distance between your vehicle and a guardrail, wall, etc. that enters the detection area is short
- When driving up and down consecutive steep inclines, such as hills, dips in the road, etc.
- When vehicle lanes are narrow, or when driving on the edge of a lane, and a vehicle traveling in a lane other than the adjacent lanes enters the detection area
- When driving on roads with sharp bends, consecutive curves, or uneven surfaces
- When the tires are slipping or spinning
- When the distance between your vehicle and a following vehicle is short
- When an accessory (such as a bicycle carrier) is installed to the rear of the vehicle
- When towing with the vehicle

Safe Exit Assist

The safe exit assist (with door opening control) is a system that uses rear side radar sensors installed on the inner side of the rear bumper to help occupants judge if an approaching vehicle or bicycle may collide with a door when exiting or cancel opening of a door, to help reduce the possibility of a collision.

⚠ WARNING

■ Cautions regarding the use of the system

- The driver is solely responsible for safe driving. Always drive safely, taking care to observe your surroundings.
- The safe exit assist is a supplementary system that, when the vehicle is stopped, informs occupants of the existence of approaching vehicles and bicycles. As this system alone cannot be used to judge safety, over-reliance on this system may lead to an accident resulting in death or serious injury.

In certain situations, this system may not function to its fullest extent. Therefore it is necessary for the occupants to visually check for safety directly and using the mirrors.

System components

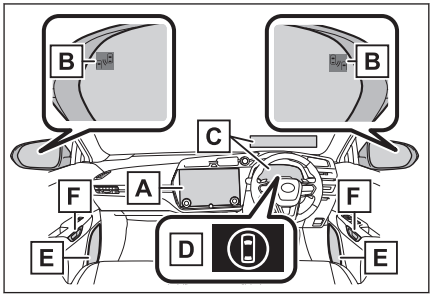

A Center Display

Turning the safe exit assist on/off.

B Outside rear view mirror indicators

When a vehicle or bicycle which may collide with a door (other than the back door) when opened is detected, the outside rear view mirror indicator (→P.301) on the detected side will illuminate. If the door on the detected side is open, or opening of the door is canceled, the outside rear view mirror indicator will blink.

C Multi-information display

If collision with a door is likely and the door is opened or opening of the door is canceled, the door will be displayed on the multi-information display. Also, if a door is

opened when an outside rear view mirror indicator is illuminated, a buzzer will sound as a warning.

D Driving assist information indicator

Illuminates when the safe exit assist is turned off. At this time, a message will be displayed on the multi-information display.

E Speakers

When the outside rear view mirror indicator blinks, the driver is informed through voice guidance that the system has operated. After the notification through voice guidance is made, no more voice guidance notifications will be made again until the door is fully closed.

F Door opener switch (manual release handle)

If a door opener switch is operated to open a door while the outside rear view mirror indicator on that side is illuminated and the system determines that the possibility of the door or an exiting occupant colliding with a vehicle or bicycle is high, opening of the door will be canceled.

INFORMATION

Outside rear view mirror indicator visibility

In strong sunlight, the outside rear view mirror indicator may be difficult to see.

Buzzer

If the volume setting of the audio system is high or the surrounding area is loud, it may be difficult to hear the buzzer.

Voice notifications

In the following situations, voice notifications will not be output:

- When it is estimated that no occupants are on board*1
- After opening a door and entering the vehicle, until the EV system is started
- When 3 minutes or more have elapsed since the EV system was stopped
- When the language setting of the Center Display has been set to a language that does not support voice notifications
- When all of the doors have been locked from outside the vehicle
- When a door remains open for 1 minute or more after the EV system is stopped
- When the ACC mode has been enabled through a customize setting on the Center Display and the EV system has been stopped
- When the parking assist volume setting on the Center Display has been set to off

*1: For each seating position, judgment is made based on the opening and closing of a door, before driving for ingress and after driving for egress.

Opening of a door can be canceled when

Opening of a door can be canceled only when the inside door opener switch is pushed in. Opening of a door will not be able to be canceled when the outside door opener switch is used.

Customization

Some functions can be customized. (→P.686)

⚠ WARNING

To ensure the system can operate properly

→P.404

Turning the safe exit assist system ON/OFF

The safe exit assist system can be enabled/disabled through a customize setting. (→P.686)

When the safe exit assist is off, the driving assist information indicator will illuminate. At this time, a message will be displayed on the multi-information display.

Each time the power switch is turned to ON, the safe exit assist is enabled.*1

Safe exit assist operation

Objects that can be detected by the safe exit assist

When the safe exit assist detects the following vehicles or bicycles behind your vehicle using a rear side radar sensor, the occupants of the vehicle are informed through an outside rear view mirror indicator, buzzer, multi-information display and voice notification.

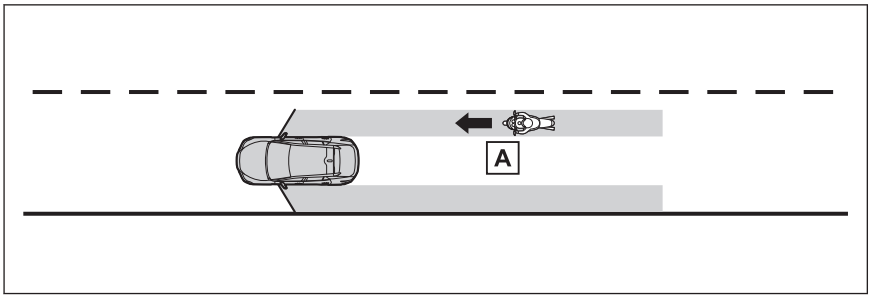

*1: When the power switch is turned off and then to ON immediately after that, the safe exit assist may not be enabled.

A Vehicle or bicycle which has a high possibility of colliding with a door (other than the back door) when opened

The safe exit assist detection areas

The areas that vehicles can be detected in are outlined below.

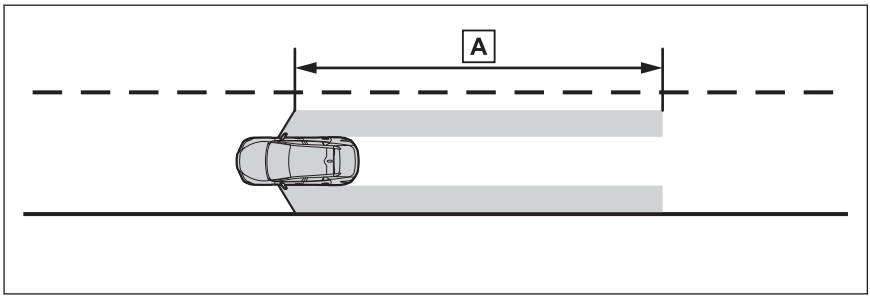

A Approximately 45 m (145 ft.) rearward from the front door*1

INFORMATION

The safe exit assist is operational when

The safe exit assist is operational when all of the following conditions are met:

- When the power switch is ON, less than 3 minutes have elapsed since the EV system was off, or less than 3 minutes have elapsed since a door was opened and someone has entered the vehicle. (the time which operation is possible may be extended if a door is opened and closed)
- Safe exit assist is on.
- The vehicle is stopped.
- The shift position is in a position other than R.

The safe exit assist will detect a vehicle when

The safe exit assist will detect a vehicle present in the detection area in the following situations:

- When the vehicle is stopped and a vehicle or bicycle, which is traveling parallel to the vehicle, is approaching within the area that a door opens (other than the back door)

Conditions under which the system will not detect a vehicle

- Safe exit assist does not detect the following objects, vehicles, and bicycles:
  - Vehicles or bicycles which are approaching slowly

*1: The faster a vehicle or bicycle is approaching, the distance at which an outside rear view mirror indicator will illuminate or blink will become further.

- Vehicles or bicycles which are determined to have a low possibility of colliding with a door (other than the back door) when opened
- Vehicles or bicycles which are approaching from directly behind
- Vehicles or bicycles which are approaching from the front
- Guardrails, walls, signs, parked vehicles, and other stationary objects
- Pedestrians, animals, etc.*1

● In situations such as the following, safe exit assist will not operate:

- When 3 minutes or more have elapsed since the EV system was off (the time which operation is possible may be extended if a door is opened and closed)
- When your vehicle is not completely stopped

■ Opening the doors when opening is canceled by the system

Perform the following operation to open a door.

After the approaching vehicle or bicycle passes or changes direction, check the surrounding area and press the inside door opener switch again. Perform the following only in an emergency, etc., to open a door while the warning is operating, after checking the safety of the area around your vehicle.

● Press and hold an inside door opener switch for approximately 3 seconds or more

● Press an inside door opener switch quickly 3 times or more

● Pull a manual release handle

■ Conditions under which the system may not function correctly

● The safe exit assist may not detect vehicles correctly in the following situations:

- When the sensor is misaligned due to a strong impact to the sensor or its surrounding area
- When mud, snow, ice, a sticker, etc., is covering the sensor or surrounding area on the rear bumper
- When driving on a road surface that is wet with standing water during bad weather, such as heavy rain, snow, or fog
- When a vehicle or bicycle approaches from behind a nearby parked vehicle
- When an approaching vehicle or bicycle suddenly changes direction
- Immediately after a vehicle or bicycle starts moving
- When the back door is open
- When a bicycle carrier, ramp, or other accessory is installed to the back of the vehicle

*1: Depending on the conditions, detection of a vehicle and/or object may occur.

- When a parked vehicle, wall, sign, person or other stationary object is behind the vehicle
- When the vehicle is stopped at an angle to the road
- When a vehicle is traveling near an approaching vehicle or bicycle
- When an approaching vehicle or bicycle is traveling along a stationary object, such a wall or sign
- When a vehicle or bicycle is approaching at high speed
- When towing with the vehicle
- When stopped on a steep slope
- When stopped on a curve or at the exit of a curve

● Instances of the safe exit assist unnecessarily detecting a vehicle and/or object may increase in the following situations:

- When the sensor is misaligned due to a strong impact to the sensor or its surrounding area
- When a vehicle or bicycle approaches your vehicle from directly behind in an offset position
- When the vehicle is stopped at an angle to the road
- When a vehicle or bicycle approaches from behind a parked vehicle at an angle
- When a parked vehicle, wall, sign, person or other stationary object is behind the vehicle
- When an approaching vehicle or bicycle suddenly changes direction
- When an approaching vehicle or bicycle is traveling along a stationary object, such a wall or sign
- When the back door is open
- When a bicycle carrier, ramp, or other accessory is installed to the back of the vehicle
- When a vehicle or bicycle is approaching at high speed
- When towing with the vehicle
- When stopped on a steep slope
- When stopped on a curve or at the exit of a curve
- When a vehicle or bicycle approaches from behind a vehicle stopped in an adjacent lane

Lexus parking assist-sensor

The Lexus parking assist-sensor function detects the approximate distance from the vehicle and an object such as a wall using ultrasonic sensors and informs the driver with the center display distance display and buzzer.

System components

Type of sensors

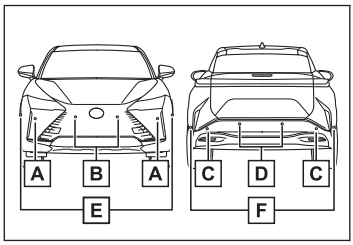

- A Front corner sensors
- B Front center sensors
- C Rear corner sensors
- D Rear center sensors
- E Front side sensors (vehicles with Advanced Park)
- F Rear side of sensors (vehicles with Advanced Park)

Display

When the sensors detect an object, such as a wall, a graphic is shown on the center display depending on the position and distance to the object.

Vehicles without center display or rear camera: When detecting a stationary object, the Lexus parking assist-sensor detection indicator illuminates. (→P.301)

▶ **Center display**

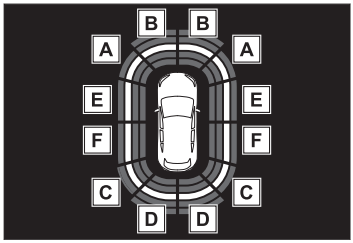

- A Front corner sensor detection
- B Front center sensor detection
- C Rear corner sensor detection
- D Rear center sensor detection
- E Front side sensor detection (vehicles with Advanced Park)
- F Rear side sensor detection (vehicles with Advanced Park)

Turning the Lexus parking assist-sensor function ON/OFF

The Lexus parking assist-sensor function can be enabled/disabled through a customize setting. (→P.685)

When the Lexus parking assist-sensor function is disabled, the Lexus parking assist-sensor OFF indicator (→P.301) illuminates on the multi-information display.

If the system switches to OFF (disabled) and the Lexus parking assist-sensor is stopped, the Lexus parking assist-sensor will not be re-enabled until ON (enabled) is selected again from the customize setting (→P.685). (It remains off even if the power switch is turned to ON again after the power switch has been turned off.)

Vechicles without the center display or rear camera: However, the system will automatically turn on (enabled) and the Lexus parking assist-sensor OFF indicator will turn off if the shift position is changed to R. When the shift position is R, the Lexus parking assist-sensor cannot be turned on or off. The setting of Lexus parking assist-sensor itself will not change.

⚠ WARNING

■ Cautions regarding the use of the system

There is a limit to the degree of recognition accuracy and control performance that this system can provide, do not overly rely on this system. The driver is always responsible for paying attention to the vehicle's surroundings and driving safely.

■ To ensure the system can operate properly

Make sure to observe the following precautions. The system may not operate properly and may lead to an unexpected accident. When these precautions cannot be observed, turn the system off.

- Do not damage the sensors, and always keep them clean.
- Do not attach a sticker or install an electronic component, such as a backlit license plate (especially fluorescent type), fog lights, fender pole or wireless antenna near a radar sensor.
- Do not subject the surrounding area of the sensor to a strong impact. If subjected to an impact, have the vehicle inspected by your Lexus dealer. If the front or rear bumper needs to be removed/installed or replaced, contact your Lexus dealer
- Do not modify, disassemble or paint the sensors.
- Do not attach a license plate cover.
- Keep your tires properly inflated.
- Do not install a suspension other than a genuine suspension.

■ Notes when washing the vehicle

- When using a high pressure washer to wash the vehicle, do not spray the sensors directly, as doing so may cause a sensor to malfunction.
- When using steam to clean the vehicle, do not direct steam too close to the sensors, as doing so may cause a sensor to malfunction.

INFORMATION

The system can be operated when

- The power switch is in ON.
- The Lexus parking assist-sensor function is on.
- The vehicle speed is less than about 10 km/h (6 mph).
- A shift position other than P is selected.
- Vehicles without the Center Display or rear camera: The system will automatically turn on (enabled) and the Lexus parking assist-sensor OFF indicator will turn off if the shift position is changed to R.

  The setting of Lexus parking assist-sensor itself will not change.

Sensor detection information

- The sensor's detection areas are limited to the areas around the vehicle'sfront and rear bumpers.
- Certain vehicle conditions and the surrounding environment may affect the ability of a sensor to correctly detect an object.
- Objects may not be detected if they are too close to the sensor.
- There will be a short delay between object detection and display.

  Even at low speeds, there is a possibility that the object will come within the sensor's detection areas before the display is shown and the warning beep sounds.
- It might be difficult to hear the buzzer due to the volume of the audio system or air flow noise of the air conditioning system.
- It may be difficult to hear the sound of this system due to the buzzers of other systems.
- If the meter malfunctions, the buzzer may not sound.

Objects which the system may not be properly detected

The shape of the object may prevent the sensor from detecting it. Pay particular attention to the following objects:

- Wires, fences, ropes, etc.
- Cotton, snow and other materials that absorb sound waves
- Sharply-angled objects
- Low objects
- Tall objects with upper sections projecting outwards in the direction of your vehicle

People may not be detected if they are wearing certain types of clothing.

Situations in which the system may not operate properly

Certain vehicle conditions and the surrounding environment may affect the ability of a sensor to correctly detect objects. Particular instances where this may occur are listed below.

- There is dirt, snow, water drops or ice on a sensor. (Cleaning the sensors will resolve this problem.)
- A sensor is frozen. (Thawing the area will resolve this problem.)

  In especially cold weather, if a sensor is frozen the sensor display may be displayed abnormally, or objects, such as a wall, may not be detected.
- When a sensor or the area around a sensor is extremely hot or cold.



- On an extremely bumpy road, on an incline, on gravel, or on grass.
- When vehicle horns, vehicle detectors, motorcycle engines, air brakes of large vehicles, the clearance sonar of other vehicles or other devices which produce ultrasonic waves are near the vehicle
- A sensor is coated with a sheet of spray or heavy rain.
- If objects draw too close to the sensor.
- When a pedestrian is wearing clothing that does not reflect ultrasonic waves (ex. skirts with gathers or frills).
- When objects that are not perpendicular to the ground, not perpendicular to the vehicle traveling direction, uneven, or waving are in the detection range.
- When strong winds are blowing
- When driving in inclement weather such as fog, snow or a sandstorm
- When an object that cannot be detected is between the vehicle and a detected object
- If an object such as a vehicle, motorcycle, bicycle or pedestrian cuts in front of the vehicle or runs out from the side of the vehicle
- If the orientation of a sensor has been changed due to a collision or other impact
- When equipment such as a towing eyelet, transport hook, bumper protector, bumper trim, bicycle carrier or snow-removal device (snow plow) is installed near the sensor
- If the front of the vehicle is raised or lowered due to the carried load

- If the vehicle cannot be driven in a stable manner, such as when the vehicle has been in an accident or is malfunctioning
- When towing with the vehicle

Situations in which the system may operate even if there is no possibility of a collision

In some situations, such as the following, the system may operate even though there is no possibility of a collision.

- When driving on a narrow road



- When driving toward a banner, flag, low-hanging branch or boom barrier (such as those used at railroad crossings, toll gates and parking lots)
- When there is a rut or hole in the surface of the road
- When driving on a metal cover (grating), such as those used for drainage ditches
- When driving up or down a steep slope
- If a sensor is hit by a large amount of water, such as when driving on a flooded road
- There is dirt, snow, water drops or ice on a sensor. (Cleaning the sensors will resolve this problem.)
- A sensor is coated with a sheet of spray or heavy rain
- When driving in inclement weather such as fog, snow or a sandstorm
- When strong winds are blowing



- When vehicle horns, vehicle detectors, motorcycle engines, air brakes of large vehicles, the clearance sonar of other vehicles or other devices which produce ultrasonic waves are near the vehicle
- If the front of the vehicle is raised or lowered due to the carried load
- If the orientation of a sensor has been changed due to a collision or other impact

- The vehicle is approaching a tall or curved curb
- Driving close to columns (H-shaped steel beams, etc.) in multi-story parking garages, construction sites, etc.
- If the vehicle cannot be driven in a stable manner, such as when the vehicle has been in an accident or is malfunctioning
- On an extremely bumpy road, on an incline, on gravel, or on grass



- When tire chains, compact spare tire or an emergency tire puncture repair kit are used
- When towing with the vehicle

Sensor detection disply, object distance

■ Detection range of the sensors

▶ Vehicles without Advanced Park

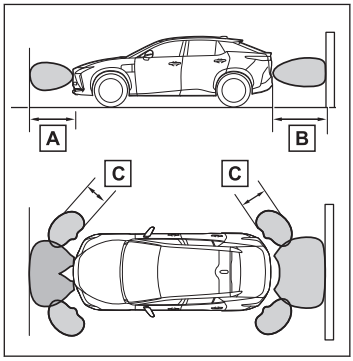

A Approximately 100 cm (3.3 ft.)

B Approximately 150 cm (4.9 ft.)

C Approximately 60 cm (2.0 ft.)

The diagram shows the detection range of the sensors. Note that the sensors cannot detect objects that are extremely close to the vehicle.

The range of the sensors may change depending on the shape of the object, etc.

▶ Vehicles with Advanced Park

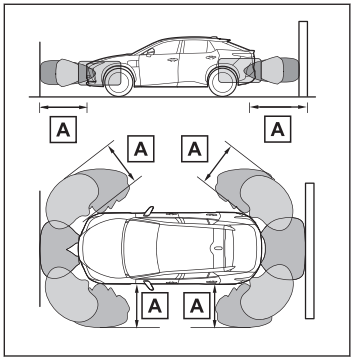

A Approximately 200 cm (6.6 ft.)

The diagram shows the detection range of the sensors. Note that the sensors cannot detect objects that are extremely close to the vehicle.

The range of the sensors may change depending on the shape of the object, etc.

■ The distance and buzzer

▶ Vehicles without Advanced Park

Approximate distance to obstacle	Buzzer
Front center sensor: Approximately 100 cm (3.3 ft.) to 60 cm (2.0 ft.)(1) Rear center sensor: Approximately 150 cm (4.9 ft.) to 60 cm (2.0 ft.)(1)	Slow
Approximately 60 cm (2.0 ft.) to 45 cm (1.5 ft.)(1)	Medium
Approximately 45 cm (1.5 ft.) to 30 cm (1.0 ft.)(1)	Fast
Approximately less than 30 cm (1.0 ft.)	Continuous

(1) Automatic buzzer mute function is enabled. (→P.422)

▶ Vehicles with Advanced Park

Approximate distance to obstacle	Buzzer
Front center sensor: Approximately 200 cm (6.6 ft.) to 100 cm (3.3 ft.) Rear center sensor: Approximately 200 cm (6.6 ft.) to 150 cm (4.9 ft.) Corner sensor: Approximately 200 cm (6.6 ft.) to 60 cm (2.0 ft.) Side sensor: Approximately 200 cm (6.6 ft.) to 165 cm (5.4 ft.)	Does not sound(Display only)
Front center sensor: Approximately 100 cm (3.3 ft.) to 60 cm (2.0 ft.)(1) Rear center sensor: Approximately 150 cm (4.9 ft.) to 60 cm (2.0 ft.)(1) Side sensor: Approximately 165 cm (5.4 ft.) to 60 cm (2.0 ft.)(1)	Slow
Except side sensor: Approximately 60 cm (2.0 ft.) to 45 cm (1.5 ft.)(1) Side sensor: Approximately 60 cm (2.0 ft.) to 40 cm (1.3 ft.)(1)	Medium

Approximate distance to obstacle	Buzzer
Except side sensor: Approximately 45 cm (1.5 ft.) to 30 cm (1.0 ft.)(1) Side sensor: Approximately 40 cm (1.3 ft.) to 30 cm (1.0 ft.)(1)	Fast
Approximately less than 30 cm (1.0 ft.)	Continuous

(1) Automatic buzzer mute function is enabled. (→P.422)

■ Lexus parking assist-sensor buzzer

A buzzer sounds when the sensors are operating.

- The buzzer beeps faster as the vehicle approaches a static object. When the vehicle comes within the approximately 30 cm (1.0 ft.) of the object, the buzzer will sound continuously.
- When 2 or more sensors simultaneously detect a static object, the buzzer sounds for the nearest object.
- After a buzzer begins sounding, if the distance between the vehicle and the detected a static object does not become shorter, the buzzer will be muted automatically. (automatic buzzer mute function)

INFORMATION

■ Adjusting the buzzer volume

The buzzer volume of the Lexus parking assist-sensor, RCTA, and RCD can all be changed at once from the customize settings. (→P.676)

■ Muting a buzzer

When the temporary mute switch is displayed on the Center Display, this switch can be pressed to temporarily mute the buzzer.

Select the switch to mute a buzzer of the Lexus parking assist-sensor, RCTA, and RCD all together.

- Mute will be automatically canceled in the following situations:
  - When the shift position is changed.
  - When the vehicle speed exceeds a certain speed.
  - When there is a malfunction in a sensor or the system is temporarily unavailable.
  - When the operating function is disabled manually.
  - When the power switch is turned off.

Lexus parking assist-sensor object warning function (vehicles with Advanced Park)

The object warning function informs the driver of the existence of objects along the side of the vehicle, using a display and buzzer, if the objects are within the estimated path of the vehicle.

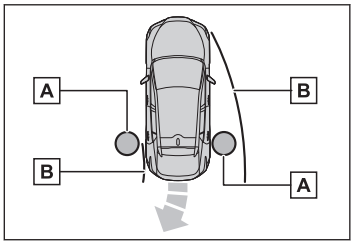

A Object
B Calculated vehicle route

When the vehicle is moving, the side sensors or side cameras can detect objects. While the vehicle is moving, if a detected object can no longer be detected by the side sensors or side cameras, the location of the object relative to the vehicle is estimated. If the object is determined to be in the estimated path of the vehicle, the object warning function will operate.

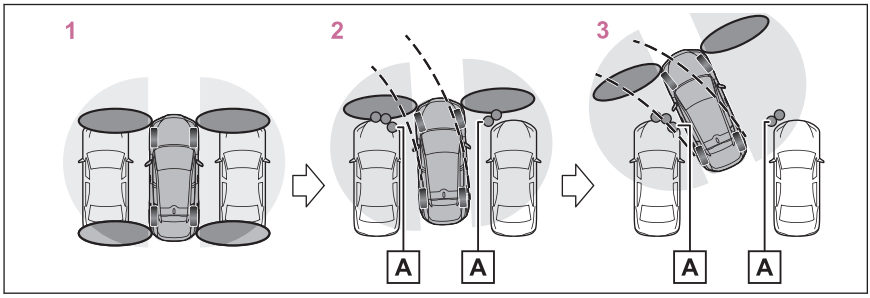

A Object detected by side sensors or side cameras

1 The vehicle is stopped and objects along the sides of the vehicle are not detected.

2 Objects are detected as the vehicle is moving.

3 Even though the objects are outside of the detection area of the side sensors or side cameras, a warning is displayed and a buzzer sounds.

INFORMATION

■ Object warning function operating conditions

● The vehicle moves about 7 m (23.0 ft.) after the EV system is started.

- The R shift position is selected.
- After the D shift position has been selected, the vehicle has moved 7 m (23.0 ft.) or less.
- VIEW switch has been pressed and the Center Display is displayed.
- The front or rear sensor detects a stationary object.

Detection of objects along the sides of the vehicle

- Objects along the sides of the vehicle are not instantaneously detected. The location of objects in relation to the vehicle is estimated after they are first detected by the front or rear side sensors, or side cameras. Therefore, after the power switch is changed to ON, even if an object is along the side of the vehicle, it may not be detected until the vehicle has been driven a small amount and the side sensors or side cameras completely scan the areas along the sides of the vehicle.
- If a vehicle, person, animal, etc., is detected by a side sensors or side cameras, but then leaves the detection area of the side sensors or side cameras, the system will assume the object has not moved.

⚠ WARNING

Side sensors and side cameras

In situations such as the following, the function may not operate correctly, possibly leading to an accident. Proceed carefully.

- When starting off shortly after the power switch is turned to ON and a small vehicle or other object which cannot be detected by a front side sensor is next to the vehicle.In the situation shown in the following illustration, even if the vehicle starts off, the vehicle on the left will not be detected and the object warning function will not operate.



- When an object or person is in a position which cannot be detected by the side sensors or side cameras.
- When, after the side sensors have completed scanning the areas along the sides of the vehicle, a vehicle, person, or other object approaches the side of the vehicle and cannot be detected.
- When the outside rear view mirror is closed, the side sensors or side cameras cannot detect objects.
- If the 12-volt battery was discharged or has been removed and installed, fold and extend the outside rear view mirrors.

Rear Cross Traffic Alert

The RCTA function uses the BSM rear side radar sensors installed behind the rear bumper. This function is intended to assist the driver in checking areas that are not easily visible when backing up.

⚠ WARNING

■ Cautions regarding the use of the system

The driver is solely responsible for safe driving. Always drive safely, taking care to observe your surroundings.

The RCTA function is only a supplementary function which alerts the driver that a vehicle is approaching from the right or left at the rear of the vehicle.

As the RCTA function may not function correctly under certain conditions, the driver's own visual confirmation of safety is necessary.

Over reliance on this function may lead to an accident resulting death or serious injury.

■ To ensure the system can operate properly

→P.404

System components

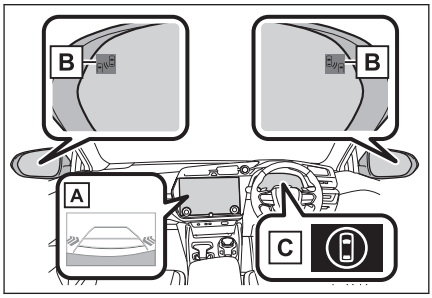

A Center Display

Turning the RCTA function on/off in Center Display.If a vehicle approaching from the right or left at the rear of the vehicle is detected, the RCTA icon (→P.427) for the detected side will be displayed on the Center Display. This illustration*1 shows an example of a vehicle approaching from both sides of the vehicle.

B Outside rear view mirror indicators

If a vehicle is detected as approaching from the left or right behind the vehicle, both outside rear view mirror indicators (→P.301) will blink and a buzzer will sound.

*1: Depending on the vehicle grade and equipped options, the actual screen may be different from this illustration.

C Driving assist information indicator

Illuminates when the RCTA is turned off. At this time, a message will be displayed on the multi-information display.

Turning the RCTA function on/off

The RCTA can be enabled/disabled through a customize setting. (→P.686)

When the RCTA function is off, the driving assist information indicator (→P.301) will illuminate and a message will be displayed on the multi-information display. Each time the power switch is turned to ON, the RCTA function is enabled.

INFORMATION

Outside rear view mirror indicator visibility

In strong sunlight, the outside rear view mirror indicator may be difficult to see.

Hearing the RCTA buzzer

The RCTA buzzer may be difficult to hear over loud noises, such as if the audio system volume is high.

Rear side radar sensors

→P.404

RCTA function

Operation of the RCTA function

The RCTA function uses rear side radar sensors to detect vehicles approaching from the right or left at the rear of the vehicle and alerts the driver of the presence of such vehicles by flashing the outside rear view mirror indicators and sounding a buzzer.

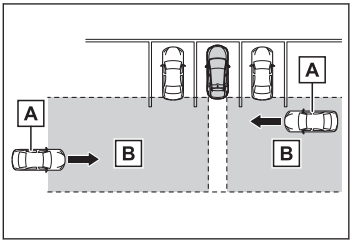

A Approaching vehicles

B Detection areas of approaching vehicles

RCTA icon display

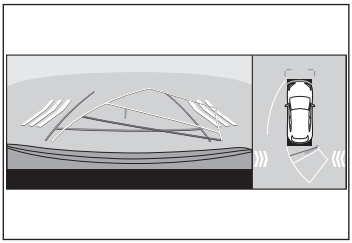

When a vehicle approaching from the right or left at the rear of the vehicle is detected, the following will be displayed on the Center Display.

Example (Panoramic view monitor): Vehicles are approaching from both sides of the vehicle

RCTA function detection areas

The areas that vehicles can be detected in are outlined below.

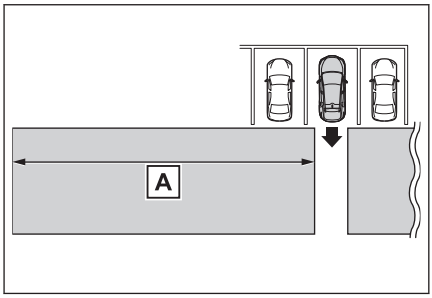

The buzzer can alert the driver of faster vehicles approaching from farther away.

Example:

Approaching vehicle speed	A Approximate alert distance
56 km/h (34 mph) (fast)	30m (98 ft.)
8 km/h (5 mph) (slow)	4m (13 ft.)

INFORMATION

The RCTA function is operational when

The RCTA function operates when all of the following conditions are met:

- The power switch is in ON mode.
- The RCTA function is on.
- The shift position is in R.
- The vehicle speed is less than approximately 15 km/h (9 mph).
- The approaching vehicle speed is between approximately 8 km/h (5 mph) and 56 km/h (34 mph).

Setting the buzzer volume

The buzzer volume of the RCTA, Lexus parking assist-sensor, and RCD can be adjusted all together through a customize setting. (→P.685)

Muting a buzzer temporarily

When an object is detected, the temporary mute switch is displayed on the Center Display.

Select the switch to mute the buzzer of the Lexus parking assist-sensor, RCTA, and RCD all together.

Mute will be canceled automatically in the following situations:

- When the shift lever is changed.
- When the vehicle speed exceeds a certain speed.
- When there is a malfunction in a sensor or the system is temporarily unavailable.
- When the operating function is disabled manually.
- When the power switch is turned off.

Conditions under which the system will not detect a vehicle

The RCTA function is not designed to detect the following types of vehicles and/or objects:

- Vehicles approaching from directly behind
- Vehicles backing up in a parking space next to your vehicle
- Vehicles that the sensors cannot detect due to obstructions



- Guardrails, walls, signs, parked vehicles and similar stationary objects*1
- Small motorcycles, bicycles, pedestrians, etc.*1
- Vehicles moving away from your vehicle
- Vehicles approaching from the parking spaces next to your vehicle*1
- The distance between the sensor and approaching vehicle gets too close

Situations in which the system may not operate properly

The RCTA function may not detect vehicles correctly in the following situations:

*1: Depending on the conditions, detection of a vehicle and/or object may occur.

- When the sensor is misaligned due to a strong impact to the sensor or its surrounding area
- When mud, snow, ice, a sticker, etc. is covering the sensor or surrounding area on the position above the rear bumper
- When driving on a road surface that is wet with standing water during bad weather, such as heavy rain, snow, or fog
- When multiple vehicles are approaching with only a small gap between each vehicle
- When a vehicle is approaching at high speed
- When equipment that may obstruct a sensor is installed, such as a towing eyelet, bumper protector (an additional trim strip, etc.), bicycle carrier, or snow plow
- When backing up on a slope with a sharp change in grade

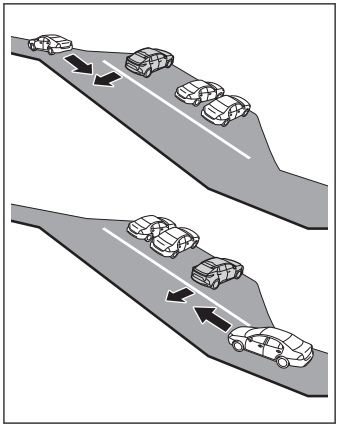

- When backing out of a sharp angle parking spot



- Immediately after the RCTA function is turned on
- Immediately after the EV system is started with the RCTA function on
- When the sensors cannot detect a vehicle due to obstructions
- When towing with the vehicle
- When there is a significant difference in height between your vehicle and the vehicle that enters the detection area
- When a sensor or the area around a sensor is extremely hot or cold.

- If the suspension has been modified or tires of a size other than specified are installed
- If the front of the vehicle is raised or lowered due to the carried load
- When turning while backing up



- When a vehicle turns into the detection area



Situations in which the system may operate even if there is no possibility of a collision

Instances of the RCTA function unnecessary detecting a vehicle and/or object may increase in the following situations:

- When the parking space faces a street and vehicles are being driven on the street



- When the distance between your vehicle and metal objects, such as a guardrail, wall, sign, or parked vehicle, which may reflect electrical waves toward the rear of the vehicle, is short



- When equipment that may obstruct a sensor is installed, such as a towing eyelet, bumper protector (an additional trim strip, etc.), bicycle carrier, or snow plow

- When a vehicle passes by the side of your vehicle



- When a detected vehicle turns while approaching the vehicle



- When there are spinning objects near your vehicle such as the fan of an air conditioning unit
- When water is splashed or sprayed toward the rear bumper, such as from a sprinkler
- Moving objects (flags, exhaust fumes, large rain droplets or snowflakes, rain water on the road surface, etc.)
- When the distance between your vehicle and a guardrail, wall, etc., that enters the detection area is short
- Gratings and gutters
- When a sensor or the area around a sensor is extremely hot or cold.
- If the suspension has been modified or tires of a size other than specified are installed
- If the front of the vehicle is raised or lowered due to the carried load
- When towing with the vehicle.

RCD (Rear camera detection)

When the vehicle is backing up, the rear camera detection function can detect pedestrians in the detection area behind the vehicle. If a pedestrian is detected, a buzzer will sound and an icon will be displayed on the Center Display to inform the driver of the pedestrian.

⚠ WARNING

■ Cautions regarding the use of the system

The recognition and control capabilities for this system are limited.

The driver should always drive safely by always being responsible without over relying on the system and have a understanding of the surrounding situations.

■ To ensure the system can operate properly

Observe the following, otherwise there is the danger that could lead to an accident.

- Always clean the camera without damaging it.
- Do not install market electronic parts (such as illuminated license plate, fog lamps, etc.) in the camera vicinity.
- Do not subject the camera vicinity to strong impacts. If the vicinity is subjected to a strong impact, have the vehicle inspected by your Lexus dealer.
- Do not disassemble, remodel or paint the camera.
- Do not attach accessories or stickers to the camera.
- Do not install market protection parts (bumper trim, etc.) to the rear bumper.
- Maintain suitable tire air pressure.
- Make sure the back door is completely closed.

■ RCD function is turned off

In the following situations the system turns off. The RCD function may not operate properly and thus there is the danger that an accident may occur.

- The contents mentioned above are not observed.
- Suspensions other than the genuine parts are installed.

System component

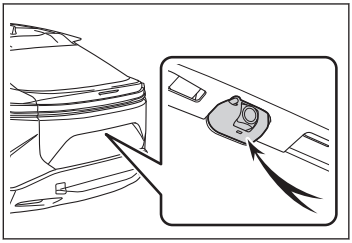

Location of the rear camera

RCD display

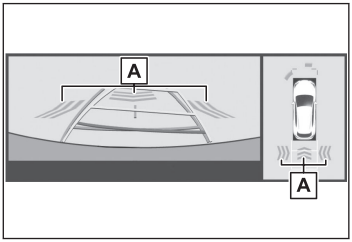

A Pedestrian detection icon

Displayed automatically when a pedestrian is detected behind the vehicle.

Turning the RCD function on/off

The RCD function can be enabled/disabled through a customize setting. (→P.686)

When the RCD function is disabled, the driving assist information indicator (→P.301) illuminates, and a message is displayed on the multi-information display. Each time the power switch is turned off then changed to ON, the RCD function will be enabled automatically.

When a pedestrian is detected

If a pedestrian is in the area behind the vehicle or if the rear camera detected that a pedestrian is approaching the vehicle from behind, the system urges caution from the driver by sounding the buzzer and displaying the detection of a pedestrian on the Center Display as follows:

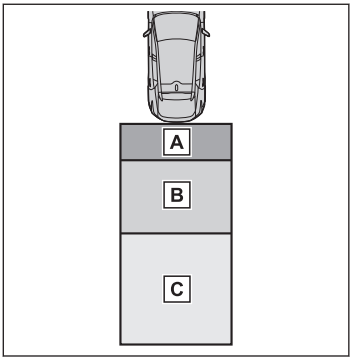

A If a pedestrian is detected in area A

Buzzer: Sounds repeatedly

Pedestrian detection icon: Blinks

B If a pedestrian is detected in area B

Buzzer (When the vehicle is stationary): Sounds 3 times

Buzzer (When the vehicle is backing up, when a pedestrian approaches the rear of the vehicle): Sounds repeatedly

Pedestrian detection icon: Blinks

C If the system determines that your vehicle may collide with a pedestrian in area C

Buzzer: Sounds repeatedly

Pedestrian detection icon: Blinks

INFORMATION

The rear camera detection function is operational when

- The power switch is in ON.
- RCD function is on.
- The shift position is in R.
- Advanced Park* is not operating

Setting the buzzer volume

The buzzer volume of the Lexus parking assist-sensor, RCTA, and RCD can all be changed at once from the customize settings. (→P.686)

Muting a buzzer temporarily

When an object is detected, the temporary mute switch is displayed on the Center Display.

Select the switch to mute a buzzer of the Lexus parking assist-sensor, RCTA, and RCD all together.

Mute will be canceled automatically in the following situations:

- When the shift position is changed.
- When the vehicle speed exceeds a certain speed.
- When there is a malfunction in a sensor or the system is temporarily unavailable.

*: If equipped

- When the operating function is disabled manually.
- When the power switch is turned off.

Situations in which the system may not operate properly

- Some pedestrians, such as the following, may not be detected by the rear camera detection function, preventing the function from operating properly:
  - Pedestrians who are bending forward or squatting
  - Pedestrians who are lying down
  - Pedestrians who are running
  - Pedestrians who suddenly appear from the shadow of the vehicle or a building
  - Pedestrians who are riding moving objects such as a bicycle or skateboard
  - Pedestrians wearing oversized clothing such as a rain coat, long skirt, etc., making their silhouette obscure
  - Pedestrians whose body is partially hidden by an object, such as a cart or umbrella
  - Pedestrians which are obscured by darkness, such as at night
- In some situations, such as the following, pedestrians may not be detected by the rear camera detection function, preventing the function from operating properly:
  - When backing up in inclement weather (rain, snow, fog, etc.)
  - The lens is dirty (by dirt or snow-melting agent, etc.) or scratched
  - When a very bright light, such as the sun, or the headlights of another vehicle, shines directly into the rear camera
  - When backing up in a place where the surrounding brightness changes suddenly, such as at the entrance or exit of a garage or underground parking lot
  - When backing up in a dim environment such as during dusk or in an underground parking lot
  - When the camera position and direction are deviated
  - When a towing hook is attached
  - When water droplets are flowing on the camera lens
  - When the vehicle height is extremely changed (nose up, nose down, etc.)
  - When tire chains or an emergency tire puncture repair kit are used
  - When the suspension has been lowered or tires that have a different size than the genuine tires are installed
  - When an aftermarket electronic part (backlit license plate, fog light, etc.) is installed near the rear camera
  - If a bumper protector, such as an additional trim strip, is installed to the rear bumper

- When towing with the vehicle

Situations in which the system may operate unexpectedly

- Even though there are no pedestrians in the detection area, some objects, such as the following, may be detected, possibly causing the rear camera detection function to operate.
  - Three dimensional objects, such as a pole, traffic cone, fence, or parked vehicle
  - Moving objects, such as a car or motorcycle
  - Objects moving toward your vehicle when backing up, such as flags or puddles (or airborne matter, such as smoke, steam, rain, or snow)
  - Cobblestone or gravel roads, tram rails, road repairs, white lines, pedestrian crossings or fallen leaves on the road
  - Metal covers (gratings), such as those used for drainage ditches
  - Objects reflected in a puddle or on a wet road surface
  - Shadows on the road
- In some situations, such as the following, the rear camera detection function may operate even though there are no pedestrians in the detection area.
  - When backing up toward the roadside or a bump on the road
  - When backing up toward an incline/decline
  - When the vehicle height is extremely changed (nose up, nose down, etc.)
  - When an aftermarket electronic part (backlit license plate, fog light, etc.) is installed near the rear camera
  - If a bumper protector, such as an additional trim strip, is installed to the rear bumper
  - If the orientation of the rear camera has been changed due to a collision or other impact, or removal and installation
  - If a towing eyelet is installed to the rear of the vehicle
  - When water is flowing over the rear camera lens
  - The lens is dirty (by dirt or snow-melting agent, etc.)
  - If there is a flashing light in the detection area, such as the emergency flashers of another vehicle
  - When tire chains or an emergency tire puncture repair kit are used
  - When towing with the vehicle
- Situations in which the rear camera detection function may be difficult to notice
  - The buzzer may be difficult to hear if the surrounding area is noisy or the audio system volume is high.

- If the temperature in the cabin is extremely high or low, the Center Display may not operate correctly.

PKSB (Parking support brake)

PKSB (Parking Support Brake) system

The system has detected the following as operation targets. (The operation targets vary depending on the function.)

- Parking Support Brake function (static objects front and rear of the vehicle): (→P.442)
- Parking Support Brake function (moving vehicles rear of the vehicle): (→P.449)
- Parking Support Brake function (pedestrians rear of the vehicle): (→P.449)
- Parking Support Brake function (static objects around the vehicle) (vehicles with the Advanced Park): (→P.442)

⚠ WARNING

■ Cautions regarding the use of the system

Do not overly rely on the system, as doing so may lead to an accident. Always drive while checking the safety of the surroundings of the vehicle.

Depending on the vehicle and road conditions, weather, etc., the system may not operate.

The detection capabilities of sensors and radars are limited. Always drive while checking the safety of the surroundings of the vehicle.

- The driver is solely responsible for safe driving. Always drive carefully, taking care to observe your surroundings. The Parking Support Brake system is designed to provide support to lessen the severity of collisions. However, it may not operate in some situations.
- The Parking Support Brake system is not designed to stop the vehicle completely. Additionally, even if the system has stopped the vehicle, it is necessary to depress the brake pedal immediately as brake control will be canceled after approximately 2 seconds.
- It is extremely dangerous to check the system operations by intentionally driving the vehicle into the direction of a wall, etc. Never attempt such actions.

■ When to disable the Parking Support Brake

In the following situations, disable the Parking Support Brake as the system may operate even though there is no possibility of a collision.

- When inspecting the vehicle using a chassis roller, chassis dynamo or free roller
- When loading the vehicle onto a boat, truck or other transport vessel
- If the suspension has been modified or tires of a size other than specified are installed
- If the front of the vehicle is raised or lowered due to the carried load

⚠ WARNING

- When equipment such as a towing hook, transport hook, bumper protector, bumper trim, bicycle carrier or snow-removal device (snow plow) is installed near the sensor
- When using automatic car washing devices
- If the vehicle cannot be driven in a stable manner, such as when the vehicle has been in an accident or is malfunctioning
- When the vehicle is driven in a sporty manner or off-road
- When the tires are not properly inflated
- When the tires are very worn
- When tire chains, a compact spare tire or an emergency tire puncture repair kit are used.
- When towing with the vehicle

■ Precautions for the suspension

Do not modify the suspension of the vehicle. If the height or tilt of the vehicle is changed, the sensors may not be able to detect detectable objects and the system may not operate correctly, possibly leading to an accident.

Enabling/Disabling the PKSB (Parking Support Brake)

The Parking Support Brake function can be enabled/disabled through a customize setting. (→P.686)

When the PKSB (Parking Support Brake) is disabled, the driving assist information indicator (→P.301) illuminates, and a message is displayed on the multi-information display. If the system switches to OFF (disabled) and the PKSB (Parking Support Brake) is stopped, the PKSB (Parking Support Brake) will not be re-enabled until ON (enabled) is selected again from the customize setting (→P.686). (It remains off even if the power switch is turned to ON again after the power switch has been turned off.)

Display and buzzer for EV system output restriction control and brake control

If the EV system output restriction control or brake control operates, a buzzer will sound and a message will be displayed on the Center Display and multi-information display, to alert the driver.

Depending on the situation, output restriction control operates to either limit acceleration or restrict output as much as possible.

- EV system output restriction control is operating (acceleration restriction)

  Acceleration greater than a certain amount is restricted by the system.

  Center Display: No warning displayed

  Multi-information display: **"Object Detected Acceleration Reduced"**

  Driving assist information indicator: Not illuminated

  Buzzer: Does not sound

- EV system output restriction control is operating (output restricted as much as possible)

  The system has determined that stronger-than-normal brake operation is necessary.

  Center Display: **"BRAKE!"**

  Multi-information display: **"BRAKE!"**

  Driving assist information indicator: Not illuminated

  Buzzer: Short beep

- Brake control is operating

  The system determined that emergency braking is necessary.

  Center Display: **"BRAKE!"**

  Multi-information display: **"BRAKE!"**

  Driving assist information indicator: Not illuminated

  Buzzer: Short beep

- Vehicle stopped by system operation

  The vehicle has been stopped by brake control operation.

  Center Display: **"Switch to Brake"**

  Multi-information display: **"Accelerator Pedal is Pressed Press Brake Pedal"**

  If the accelerator pedal is not depressed, **"Press Brake Pedal"** will be displayed.

  Driving assist information indicator: Illuminated

  Buzzer: Sounds repeatedly

System overview

If the Parking Support Brake determines that a collision with a detected object or pedestrian is possible, the EV system output will be restricted to restrain any increase in the vehicle speed. (EV system output restriction control: See figure 2 below.)

Additionally, if the accelerator pedal continues to be depressed, the brakes will be applied automatically to reduce the vehicle speed. (Brake control: See figure 3.)

● Figure 1: When the PKSB (Parking Support Brake) is not operating

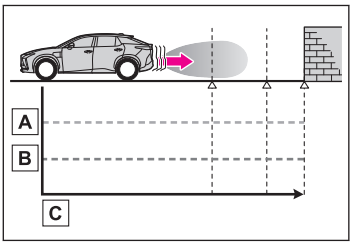

A EV system output
B Braking force
C Time

● Figure 2: When EV system output restriction control operates

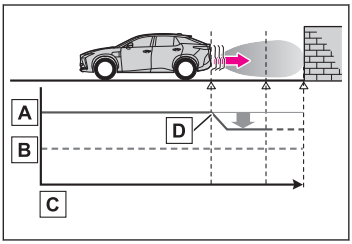

A EV system output
B Braking force
C Time
D EV system output restriction control begins operating (System determines that possibility of collision with detected object is high)

● Figure 3: When EV system output restriction control and brake control operates

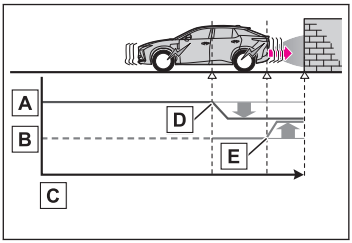

A EV system output
B Braking force
C Time
D EV system output restriction control begins operating (System determines that possibility of collision with detected object is high)
E Brake control begins operating (System determines that possibility of collision with detected object is extremely high)

INFORMATION

If the Parking Support Brake has operated

If the vehicle is stopped due to operation of the Parking Support Brake, the Parking Support Brake will be disabled and the driving assist information indicator will illuminate.

In addition, even when the PKSB (Parking Support Brake) operates, the brake control is canceled after approximately 2 seconds to start off.

Furthermore, the brake control also can be canceled by depressing the brake pedal. Depressing the accelerator pedal again after that allows the vehicle to start off.

Re-enabling the Parking Support Brake

To re-enable the Parking Support Brake when it is disabled due to operation of the PKSB (Parking Support Brake), either enable the system again, or turn the power switch off and then back to ON.

Additionally, if any of the following conditions are met, the system will be re-enabled automatically and the driving assist information indicator will turn off (→P.301):

- The P shift position is selected
- Drive with no operation targets in the traveling direction of the vehicle
- Change the traveling direction of the vehicle

Buzzer

Regardless of whether the Lexus parking assist-sensor is enabled or not (→P.415), if the PKSB (Parking Support Brake) system is enabled (→P.439), the buzzer will sound to notify the driver of the approximate distance to the object when the brake control and the EV system output restriction control are operated.

Parking Support Brake function (static objects front and rear of the vehicle/static objects around the vehicle)

If the sensors detect a static object, such as a wall, in the traveling direction of the vehicle and the system determines that a collision may occur due to the vehicle suddenly moving forward due to an accidental accelerator pedal operation, the vehicle moving the unintended direction due to the wrong shift position being selected, or while parking or traveling at low speeds, the system will operate to lessen the impact with the detected static object and reduce the resulting damage.

Examples of function operation (static objects front and rear of the vehicle)

This function will operate in situations such as the following if an object is detected in the traveling direction of the vehicle.

■ **When traveling at a low speed and the brake pedal is not depressed, or is depressed late**

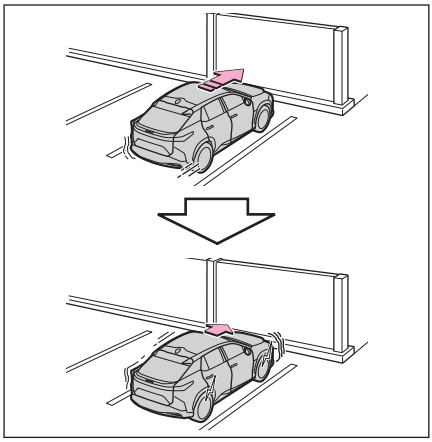

■ **When the accelerator pedal is depressed excessively**

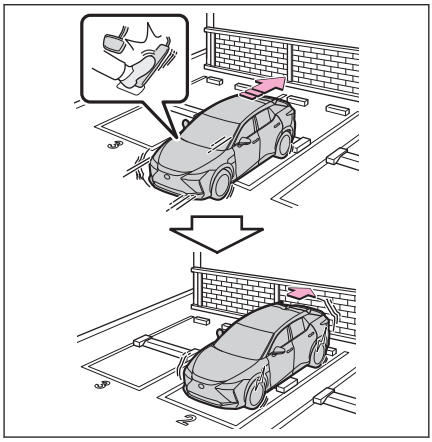

■ **When the vehicle moves forward due to the incorrect shift position being selected**

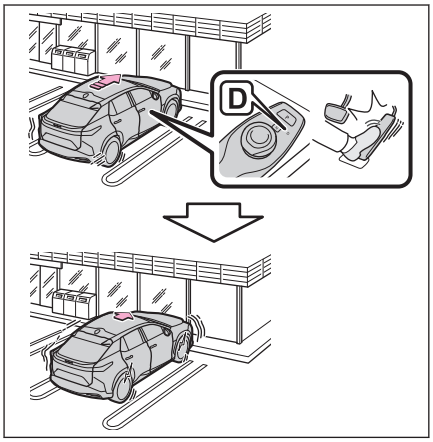

Examples of function operation (static objects around the vehicle) (Vehicles with Advanced Park)

The system will operate in the following situations when a stationary object is detected in the surrounding area.

■ **When moving forward and a collision with a stationary object on the inner side of a turn is likely**

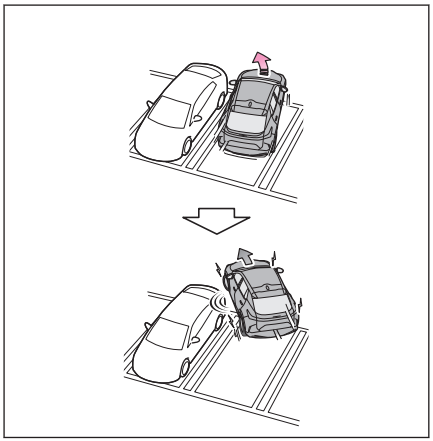

When reversing and a collision with a stationary object on the outer side of a turn is likely

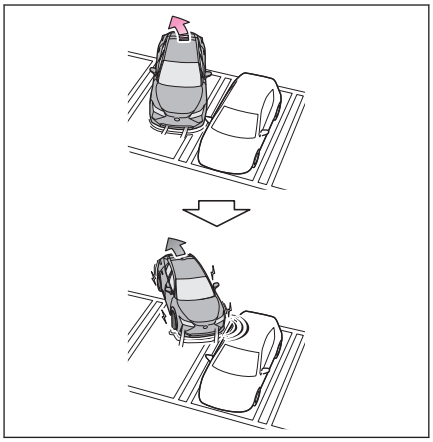

Types of sensors

→P.415

⚠ WARNING

To ensure the system can operate properly

→P.416

If the Parking Support Brake function operates unnecessarily, such as at a railroad crossing

→P.441

Notes when washing the vehicle

→P.416

INFORMATION

The Parking Support Brake function (static objects front and rear of the vehicle) will operate when

The function will operate when the driving assist infomation indicator is not illuminated (→P.298,574) and all of the following conditions are met:

- EV system output restriction control
  - The Parking Support Brake is enabled.
  - The vehicle speed is approximately 15 km/h (9 mph) or less.
  - There is a static object in the traveling direction of the vehicle and approximately 2 to 4 m (6 to 13 ft.) away.

- The Parking Support Brake determines that a stronger-than-normal brake operation is necessary to avoid a collision.

● Brake control

- EV system output restriction control is operating.
- The Parking Support Brake determines that an immediate brake operation is necessary to avoid a collision.

■ The Parking Support Brake function (static objects around the vehicle) will operating when (Vehicles with Advanced Park)

This function is operable when any of the following conditions is met in addition to the operating conditions for static objects in front and rear of the vehicle.

● After the EV system has been started, the vehicle has moved approximately 7 m (23.0 ft.) or less

● The R shift position is selected

● After the shift position has been changed from R to D, the vehicle has moved approximately 7 m (23.0 ft.) or less

■ The Parking Support Brake function (static objects front and rear of the vehicle/static objects around the vehicle) will stop operating when

The function will stop operating if any of the following conditions are met:

● EV system output restriction control

- The Parking Support Brake is disabled.
- The system determines that the collision has become avoidable with normal brake operation.
- The static object is no longer approximately 2 to 4 m (6 to 13 ft.) away from the vehicle or in the traveling direction of the vehicle.

● Brake control

- The Parking Support Brake is disabled.
- Approximately 2 seconds have elapsed since the vehicle was stopped by brake control.
- The brake pedal is depressed after the vehicle is stopped by brake control.
- The static object is no longer approximately 2 to 4 m (6 to 13 ft.) away from the vehicle or in the traveling direction of the vehicle.

■ Detection range of the Parking Support Brake function (static objects front and rear of the vehicle/static objects around the vehicle)

The detection range of the Parking Support Brake function (static objects front and rear of the vehicle/static objects around the vehicle) differs from the detection range of the Lexus parking assist-sensor (→P.420). Therefore, even if the Lexus parking assist-sensor

detects an object and provides a warning, the Parking Support Brake function (static objects front and rear of the vehicle/static objects around the vehicle) may not start operating.

■ **Situations in which the system may not operate properly**

→P.418

■ **Situations in which the system may operate even if there is no possibility of a collision**

→P.418

■ **Situations in which the system may operate even though there is no possibility of a collision (static objects around the vehicle) (vehicles with Advanced Park)**

In addition to the situations in which static objects in front and rear of the vehicle(→P.446) may not be detected, objects may not be detected by the sensors in the following situations:

- When moving sideways, such as when parallel parking (→P.468)

■ **Detection of objects along the sides of the vehicle (static objects around the vehicle) (vehicles with Advanced Park)**

- Objects along the sides of the vehicle are not instantaneously detected. The location of objects in relation to the vehicle is estimated after they are first detected by the front or rear side sensors, or side cameras. Therefore, after the power switch is changed to ON, even if an object is along the side of the vehicle, it may not be detected until the vehicle has been driven a small amount and the side sensors or side cameras completely scan the areas along the sides of the vehicle.
- If a vehicle, person, animal, etc., is detected by a side sensors or side cameras, but then leaves the detection area of the side sensors or side cameras, the system will assume the object has not moved.

Parking Support Brake function (moving vehicles rear of the vehicle)

If a rear radar sensor detects a vehicle approaching from the right or left at the rear of the vehicle and the system determines that the possibility of a collision is high, this function will perform brake control to reduce the likelihood of an impact with the approaching vehicle.

Examples of the function operation

This function will operate in situations such as the following if a vehicle is detected in the traveling direction of the vehicle.

When reversing, a vehicle is approaching and the brake pedal is not depressed, or is depressed late

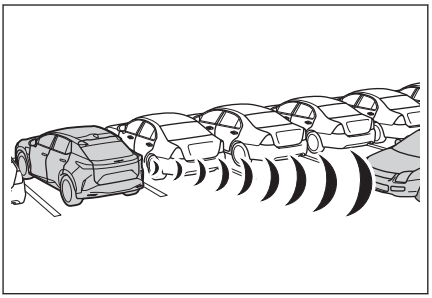

Types of sensors

→P.404

⚠ WARNING

To ensure the system can operate properly

→P.404

INFORMATION

The Parking Support Brake function (moving vehicles rear of the vehicle) will operate when

The function will operate when the driving assist infomation indicator is not illuminated (→P.298,574) and all of the following conditions are met:

- EV system output restriction control
  - The Parking Support Brake is enabled.
  - The vehicle speed is approximately 15 km/h (9 mph) or less.
  - Vehicles are approaching from the right or left at the rear of the vehicle at a traveling speed of approximately 8 km/h (5 mph) or more.
  - The shift position is in R.
  - The Parking Support Brake determines that a stronger than normal brake operation is necessary to avoid a collision with an approaching vehicle.
- Brake control
  - EV system output restriction control is operating.
  - The Parking Support Brake determined that an emergency brake operation was necessary to avoid a collision with a vehicle approaching from the rear.

■ **The Parking Support Brake function (moving vehicles rear of the vehicle) will stop operating when**

The function will stop operating if any of the following conditions are met:

● EV system output restriction control

- The Parking Support Brake is disabled.
- The collision becomes avoidable with normal brake operation.
- A vehicle is no longer approaching from the right or left at the rear of the vehicle.

● Brake control

- The Parking Support Brake is disabled.
- Approximately 2 seconds have elapsed since the vehicle was stopped by brake control.
- The brake pedal is depressed after the vehicle is stopped by brake control.

■ **Situations in which the system may not operate properly**

→P.425

■ **Situations in which the system may operate even if there is no possibility of a collision**

→P.425

Parking Support Brake function (pedestrians rear of the vehicle)

If the rear camera sensor detects a pedestrian behind the vehicle while backing up and the system determines that the possibility of colliding with the detected pedestrian is high, a buzzer will sound. If the system determines that the possibility of colliding with the detected pedestrian is extremely high, the brakes will be applied automatically to help reduce the impact of the collision.

Examples of system operation

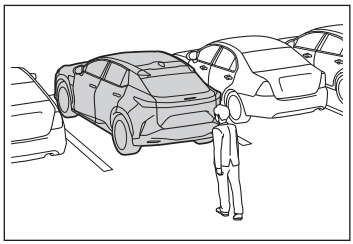

The system operates when an approaching pedestrian is detected behind the vehicle while backing up, and when the brake pedal is not depressed or is depressed late.

Screen display of pedestrians rear of the vehicle

Displays a message to urge the driver to take evasive action when a pedestrian is detected in the detection area behind the vehicle.

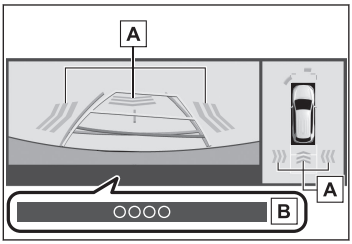

A Pedestrian detection icon

B "BRAKE!"

⚠ WARNING

■ If the Parking Support Brake function (pedestrians rear of the vehicle) operates unnecessarily

Depress the brake pedal immediately after the Parking Support Brake function (pedestrians rear of the vehicle) operates. (Operation of the function is canceled by depressing the brake pedal.)

■ Correct use of the Parking Support Brake function (pedestrians rear of the vehicle)

→P.432

INFORMATION

■ The Parking Support Brake function (pedestrians rear of the vehicle) will operate when

The function will operate when the driving assist information indicator is not illuminated (→P.298,574) and all of the following conditions are met:

● EV system output restriction control

- The Parking Support Brake is enabled.
- The vehicle speed is 15 km/h (9 mph) or less.
- The shift position is in R.
- When a pedestrian is to the rear of the vehicle
- The system determines that a slightly stronger brake operation than usual is needed to avoid a collision.

● Brake control

- EV system output restriction control is operating.
- The Parking Support Brake determines that an emergency brake operation is necessary to avoid a collision with a pedestrian.

■ **The Parking Support Brake function (pedestrians rear of the vehicle) will stop operating when**

The function will stop operating if any of the following conditions are met:

● EV system output restriction control

- The Parking Support Brake is disabled.
- The collision becomes avoidable with normal brake operation.
- The pedestrian is no longer detected behind your vehicle.

● Brake control

- The Parking Support Brake is disabled.
- Approximately 2 seconds have elapsed since the vehicle was stopped by brake control.
- The brake pedal is depressed after the vehicle is stopped by brake control.

■ **Re-enabling the Parking Support Brake function (pedestrians rear of the vehicle)**

→P.442

■ **Detection area of the Parking Support Brake function (pedestrians rear of the vehicle)**

The detection area of the Parking Support Brake function (pedestrians rear of the vehicle) differs from the detection area of the RCD function (→P.433). Therefore, even if the RCD function detects a pedestrian and provides an alert, the Parking Support Brake function (pedestrians rear of the vehicle) may not start operating.

■ **Situations in which the system may not operate properly**

→P.435

■ **Situations in which the system may operate unexpectedly**

→P.436

Lexus Teammate Advanced Park*

Function description of the Lexus Teammate Advanced Park

The Advanced Park is a system which assists in a safe and smooth parking or exiting from a parking space by displaying the blind spots around the vehicle and the target parking spot through a bird's eye view, delivering operation guidance through displays and buzzer operation, and shifting the shift position, operating the steering wheel, accelerator pedal, and brake pedal.

Additionally, the panoramic view monitor*1 can display the area in front, behind, and from above the vehicle, helping confirm the condition of the area around the vehicle.

The turn signal lights will blink automatically when the parking assistance starts until the vehicle reaches the target parking spot, to notify people around the vehicle that parking is being performed.

Depending on the condition of the road surface or the vehicle, the distance between the vehicle and a parking space, etc., it may not be possible to assist in parking in the target space.

Only use Advanced Park in accordance with all local road traffic laws and regulations.

Functions

■ Perpendicular parking (forward/reverse) function

Assistance is provided from the position the vehicle is stopped near the target parking space until the vehicle is in the parking space. (→P.463)

■ Perpendicular exiting (forward/reverse) function

Assistance is provided from the parked position until the vehicle is in a position where you can easily exit from the parking space. (→P.466)

■ Parallel parking function

Assistance is provided from the position the vehicle is stopped near the target parking space until the vehicle is in the parking space. (→P.468)

■ Parallel exiting function

Assistance is provided from the parked position until the vehicle is in a position where you can easily exit from the parking space. (→P.471)

*: If equipped

*1: For details on the panoramic view monitor refer to "Multimedia Owner's Manual".

Memory function

Assistance is provided until the vehicle is guided into a previously registered parking space. (→P.474)

⚠ WARNING

Cautions regarding the use of the system

The recognition and control capabilities for this system are limited. The driver should always drive safety by always being responsible without over relying on the system and have a understanding of the surrounding situations.

- As with a normal vehicle, take care to observe your surroundings while the vehicle is moving.
- Always pay attention to the vehicle's surroundings while the system is operating and depress the brake pedal as necessary to slow or stop the vehicle.
- When parking, make sure that the vehicle can be parked in the target parking space before beginning operation.
- Depending on the condition of the road surface or the vehicle, the distance between the vehicle and a parking space, etc., it may not be possible to detect a parking space or the system may not be able to provide assistance to the point the vehicle is fully parked.
- This system will guide the vehicle to appropriate positions for changing the direction of travel, however, if you feel that the vehicle is approaching too close to an adjacent parked vehicle at any time, depress the brake pedal and shift the shift position. However, if this is performed, the number of times the vehicle changes direction may increase, and the vehicle may be parked at an angle.
- As certain objects or materials, such as the following, may not be detected, make sure to check the safety of the area around your vehicle and depress the brake pedal to stop the vehicle if it may collide with an object.
  - Thin objects (wires, fences, ropes, poles, etc.) or objects that appear like thin from a certain angle of approach (signs, bicycles, etc.)
  - Materials that absorb sound waves (cotton, snow, etc.)
  - Sharp-edged objects (block walls/columns, wall corners, etc.)
  - Objects in lower places (curb stones/blocks, stairs, parking blocks, etc.)
  - Tall objects with upper sections that protrude outward (beams, etc.)
  - Objects which are not perpendicular to the ground
  - Objects to which the vehicle is approaching diagonally
- Even if there is an object in the target parking space, it may not be detected and assistance may be performed.

⚠ WARNING

- If it is likely that your vehicle will collide with a nearby vehicle, object, or person, or go over the top of a parking block, depress the brake pedal to stop the vehicle and press the Advanced Park main switch to disable the system.
- Never use only the center display to view the area behind the vehicle. The image displayed may differ than the actual situation. Using only the screen when backing up may lead to an accident, such as a collision with another vehicle. When backing up, make sure to look directly or use the mirrors to check the safety of the area around your vehicle, especially behind the vehicle.
- When the ambient temperature is extremely low, the screen may appear dark or the displayed image may become unclear. Also, as moving objects may appear distorted or may not be able to be seen on the screen, make sure to directly check the safety of the area around your vehicle.
- In the following situations, while the vehicle is stopped and held by Advanced Park, it may be canceled and the vehicle may start moving. Immediately depress the brake pedal. Failure to do so may lead to an accident.
  - When the driver's door is opened
  - When operations instructed by the system are not performed within a certain amount of time
  - When the brake pedal is depressed and the vehicle is stopped for a certain amount of time
  - When the system malfunctions
- As the steering wheel will turn while this system is operating, pay attention to the following.
  - Be careful so that a necktie, scarf, or arm does not get caught. Keep your upper body away from the steering wheel. Also, keep children away from the steering wheel.
  - Long fingernails may be caught and when the steering wheel is rotating, leading to injury.
  - In an emergency, depress the brake pedal to stop the vehicle, and then press the Advanced Park main switch to disable the system.
- Do not allow anyone to put their hands outside of a window while this system is operating.

To ensure correct operation of the Advanced Park

Observe the following precautions. Failing to do so may result in the vehicle being unable to be driven safely and possibly cause an accident.

- Do not use this system in situations such as the following:

⚠ WARNING

- When in areas other than common parking spaces
- When the surface of the parking space is sand or gravel and is not clearly defined with parking space lines
- When the parking space is not level, such as on a slope, or having differences in height, holes, or gutters
- Mechanical parking system
- Parking lot with a device which raises to contact the bottom of the vehicle
- When the road surface is frozen, slick, or covered with snow
- When it is extremely hot and the asphalt is melting
- When there are objects around the vehicle
- When there is an object between your vehicle and the target parking spot or within the target parking spot (within the displayed blue box)
- When in high pedestrian or vehicle traffic areas
- When the parking space is in a location that is difficult to park in (too narrow for your vehicle, etc.)
- When images are unclear due to dirt or snow attached to the camera lens, light being shined into the camera or shadows
- When tire chains or a compact spare tire is installed to the vehicle
- When the doors or back door are not completely closed
- When an arm is held outside of a window
- In inclement weather such as heavy rain or snow

● Make sure to use only standard sized tires, such as those that were installed to the vehicle when it was shipped from the factory. Otherwise, Advanced Park may not operate properly. Also, when the tires have been replaced, the displayed position of the lines or box displayed on the screen may become incorrect. When replacing the tires, contact your Lexus dealer.

● In situations such as the following, it may not be possible for the system to provide assistance to a registered parking spot or to operate correctly:

- When the tires are extremely worn or the tire inflation pressure is low
- When carrying a heavy load
- When the vehicle is tilted due to the carried load
- When a heater is installed in the surface of the parking space (road surface freeze prevention heater)

⚠ WARNING

- When the wheels are misaligned, such after a wheel has been subjected to a strong impact
- When a pedestrian or passing vehicle is detected during assistance
- When a device, such as a towing hook, bumper protector, bumper trim, bicycle carrier, snow plow, etc., is installed
- When something is incorrectly detected as a parking line (light, reflections from a building, difference in height on the parking surface, a gutter, painted road lines, redrawn lines, etc.)

If the vehicle deviates greatly from the set parking space in any situation other than the above, have the vehicle inspected by your Lexus dealer.

⚠ NOTICE

■ Precautions for use Advanced Park

If the 12-volt battery was discharged or has been removed and installed, fold and extend the outside rear view mirrors.

Types of cameras and sensors used for the Advanced Park

Cameras and sensors are used to detect parked vehicles, making it easier to identify parking spaces.

▶ Front camera

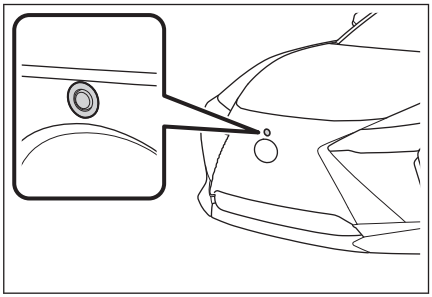

▶ Side cameras

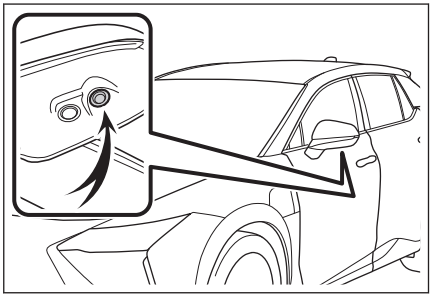

▶ Rear camera

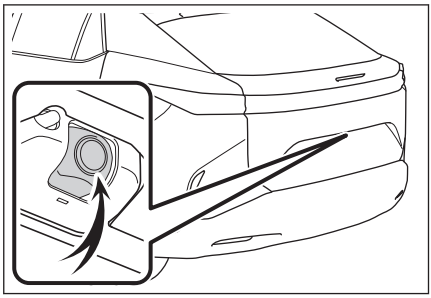

▶ Sensors

→P.415

INFORMATION

■ Camera images

As special cameras are used, the colors in displayed images may differ from the actual color.

■ Precautions for use

For details on the following, refer to “Panoramic view monitor (Vehicles equipped with Lexus Teammate Advanced Park)” of “Peripheral monitoring system” in the "Multimedia Owner's Manual".

- Displayable range of the screens
- Cameras
- Differences between displayed images and the actual road
- Differences between displayed images and the actual objects

■ Detection range of the cameras and sensors

- If a parked vehicle is behind the target parking space and the distance between it and the vehicle becomes far, it may no longer be able to be detected. Depending on shape

or condition of a parked vehicle, the detection range may become short or the vehicle may not be detected.

- Objects other than parked vehicles, such as columns, walls, etc., may not be detected. Also, if they are detected, they may cause the target parking space to be misaligned.

Situations in which parking space lines may not be recognized properly

- In situations such as the following, parking space lines on the road surface may not be detected:
  - When the parking space does not use lines (parking space boundaries are marked with rope, blocks, etc.)
  - When the parking space lines are faded or dirty, making them unclear
  - When the road surface is bright, such as concrete, and the contrast between it and the white parking space lines is small
  - When the parking space lines are any color other than yellow or white
  - When the area surrounding the parking space is dark, such as at night, in an underground parking lot, parking garage, etc.
  - When it is raining or has rained and the road surface is wet and reflective or there are puddles
  - When the sun is shining directly into a camera, such as in the early morning or evening
  - When the parking space is covered with snow or de-icing agent
  - When there marks from repairs or other marks on the road surface, or there is a traffic bollard, or other object on the road surface
  - When the color or brightness of the road surface is uneven
  - When a camera has been splashed by hot or cold water and the lens has fogged up
  - When the appearance of the parking space is affected by the shadow of the vehicle or trees
  - When a camera lens is dirty or covered with water droplets
- In situations such as the following, the target parking space may not be recognized correctly:
  - When there marks from repairs or other marks on the road surface, or there is a parking block, traffic bollard, or other object on the road surface
  - When it is raining or has rained and the road surface is wet and reflective or there are puddles
  - When the area around the vehicle is dark or backlit
  - When the color or brightness of the road surface is uneven

- When the parking space is on a slope
- When there are diagonal lines (access aisle) near the parking space
- When the appearance of the parking space is affected by the shadow of a parked vehicle (such as shadows from the grille, side step, etc.)
- When accessories which obstruct the view of the camera are installed
- When the parking space lines are faded or dirty, making them unclear
- When the appearance of the parking space is affected by the shadow of the vehicle or trees

■ **Sensor detection information**

→P.420

■ **Objects which the sensor may not be properly detected**

→P.417

■ **Situations in which the sensor may not operate properly**

→P.418

■ **Situations in which parking assistance may not operate even if there is no possibility of a collision**

→P.419

⚠ WARNING

■ **Precautions for the cameras and sensors**

- Due to the characteristics of the camera lens, the position of and distance to people and objects displayed on the screen may differ from the actual situation. For details, refer to "Multimedia Owner's Manual".
- Make sure to observe the precautions for using the Lexus parking assist-sensor, otherwise a sensor may not operate correctly, possibly leading to an accident. (→P.416)
- In situations such as the following, the sensors may not operate correctly, possibly leading to an accident. Proceed carefully.
  - When there is a parked vehicle next to the target parking space, if the displayed target parking space is far from the actual target parking space, a sensor may be misaligned. Have the vehicle inspected by your Lexus dealer.
  - Do not install any accessories near the detection area of the sensors.

Turning the Advanced Park system on/off

● **Press the Advanced Park main switch.**

If the switch is pressed while assistance is being performed, the assistance will be canceled.

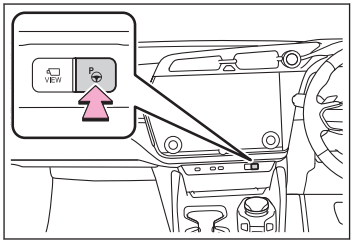

INFORMATION

Operating conditions of the Advanced Park

Assistance will begin when all of the following conditions are met:

- The brake pedal is depressed
- The vehicle is stopped
- The driver's seat belt is fastened
- The steering wheel is not being operated
- The accelerator pedal is not depressed
- All of the doors and the back door are closed
- The outside rear view mirrors are not folded
- The parking brake is not engaged
- The dynamic radar cruise control are not operating
- ABS, VSC, TRC, PCS and PKSB are not operating
- The vehicle is not on a steep slope
- The VSC and TRC are not turned off

If assistance cannot be started, check the message displayed on the center display. (→P.482)

Advanced Park guidance screens

Guidance screens are displayed on the center display.

▶ Guidance screen (When assistance starts)

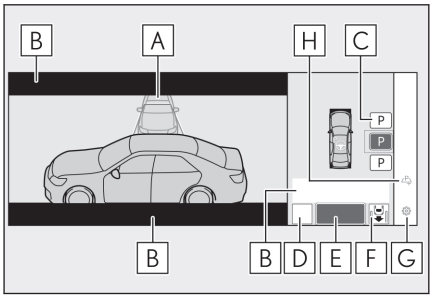

A Target parking space box (blue)

B Advice display

C Parking type change button

If multiple buttons are displayed, depending on the condition of the button its function differs as follows.

P or P : Change the target to another parking space.

P or P : Select the current target parking space.

: Select to change to the parallel parking function

: Change the perpendicular parking (forward/reverse) function

D [MODE] button

Select to change between the memory function and the perpendicular parking (forward/reverse) function and parallel parking function. (→P.476)

E [Start] button

Select to start parking assistance.

F Perpendicular parking direction change button

Select to change between the parking (forward) function and parking (reverse) function.

: Change the perpendicular parking (forward) function

: Change the perpendicular parking (reverse) function

G Customize setting button

Select to display the Advanced Park setting screen. (→P.481)

H Registration button

Select to begin registering a parking space.

▶ Guidance screen (When reversing)

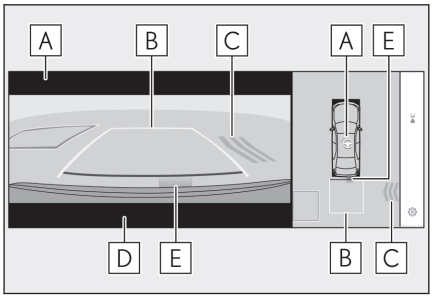

A Operation icon

Displayed when the Advanced Park is operating.

B Guide lines (yellow and red)

Display points from the center of the edge of the front or rear bumper to the target stopping position (yellow)*1 and approximately 0.3 m (1 ft.) (red) from the vehicle.

C Moving object warning icon

D Emergency support brake control operation display

"BRAKE!" is displayed.

E Lexus parking assist-sensor display

→P.415

INFORMATION

■ Lexus parking assist-sensor pop-up display

Regardless of whether the Lexus parking assist-sensor is off or on (→P.415), if an object is detected by the Lexus parking assist-sensor when the Advanced Park is operating, the Lexus parking assist-sensor pop-up display will automatically be displayed over the guidance display.

■ Brake control operation when Advanced Park is operating

While the Advanced Park is operating, if the system determines that the possibility of collision with detected moving or stationary object is high, the EV system output restriction control and brake control will operate.

If brake control operates, Advanced Park operation will be suspended and a message will be displayed on the multi-information display.

*1: The yellow lateral line is not displayed when the target stopping position is approximately 2.5 m (8.2 ft.) or more away from the vehicle.

■ **Buzzer**

Depending on surrounding sounds or sounds from other systems, it may be difficult to hear the buzzer of this system.

■ **If a black screen is displayed on the center display when the Advanced Park is operating**

The system is being affected by radio waves or may be malfunctioning. If a radio antenna is installed near a camera, move it to a location as far from the cameras as possible. If a radio antenna is not installed near a camera, and the screen does not return to normal after turning the power switch off and then starting the EV system again, have the vehicle inspected by your Lexus dealer.

Perpendicular parking (forward/reverse) function

The perpendicular parking (forward/reverse) function can be used if the target parking space can be detected when the vehicle is stopped close and perpendicular to the center of the parking space. Also, depending on the condition of the parking space, etc., if it is necessary to change the direction of travel of the vehicle, the shift position can be shifted by assistance control.

Parking using the perpendicular parking (forward/reverse) function

1 **Stop the vehicle at a position close and perpendicular to the center of the target parking space.**

▶ **If there are parking space lines**

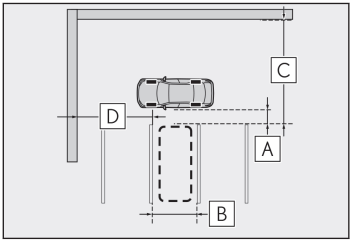

A Approximately 1 m (3.3 ft.)*1

B Approximately 2.5 m (8.2 ft.)*1

C Approximately 6 m (19.7 ft.) or more*1

D Approximately 5.5 m (18.0 ft.) or more*1

The system can operate even if there is a parking space line on only one side of the target parking space.

*1: This is a reference measurement for detection of a parking space. Depending on the surrounding environment, detection may not be possible.

▶ **If there is an adjacent parked vehicle**

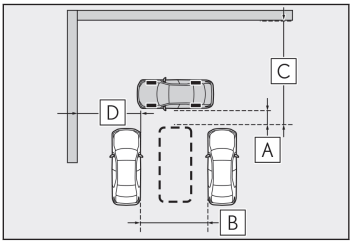

A Approximately 1 m (3.3 ft.)*1

B Approximately 3 m (9.8 ft.) or more*1

C Approximately 6 m (19.7 ft.) or more*1

D Approximately 5.5 m (18.0 ft.) or more*1

The system can operate even if there is a vehicle on only one side of the target parking space.

2 **Press the Advanced Park main switch and check that a possible parking space is displayed on the center display.**

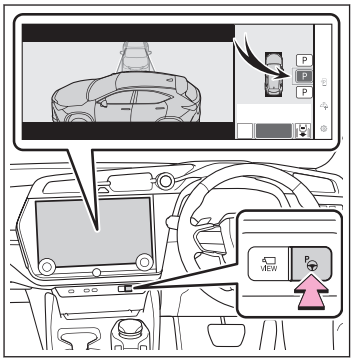

- If a space which your vehicle can be parked is detected, a target parking space box will be displayed.
- If it is possible to parallel park in the space, select the parking space, and then select (P) to change to the parallel parking function.
- If it is possible to change the direction which a parking space is entered, select the parking space, and then select or change the direction.
- Depending on the surrounding environment, it may not be possible to use this function. According to the information displayed on the center display, use the function on another parking space.

3 **Select [Start] button.**

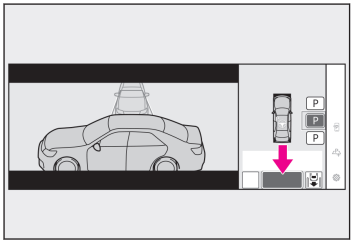

A buzzer will sound, an operation message will be displayed on the multi-information display, and assistance will begin operating.

- When the brake pedal is released, **"Moving Forward..."**, **"Backing Up..."** will be displayed and the vehicle will begin moving forward/reverse.
- To cancel assistance, press the Advanced Park main switch.

If assistance is canceled, **"Advanced Park Cancel"** will be displayed.

*1: This is a reference measurement for detection of a parking space. Depending on the surrounding environment, detection may not be possible.

If you feel that the vehicle is approaching close to a surrounding vehicle, object, person, or gutter: →P.465

4 **Perform operations as indicated by the advice displays until the vehicle stops in the target parking space.**

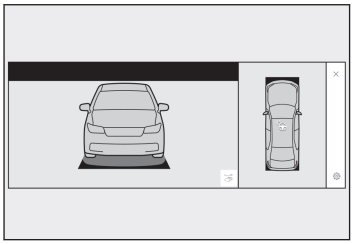

When the vehicle stops, **"Advanced Park Finished"** will be displayed and parking assistance will end.

If you select on the center display, the vehicle displayed on the parking assist completion screen will rotate.

INFORMATION

If you feel that the vehicle is approaching close to a surrounding vehicle, object, person, or gutter

Depress the brake pedal to stop the vehicle and then shift the shift position to change the direction of travel of the vehicle. At this time, assist will be suspended. However, if the [**Start**] button is selected, assist will resume and the vehicle will move in the direction corresponding to the selected shift position.

When the brakes have been operated

When the brakes have been operated, brake operation sound may be heard. This does not indicate a malfunction.

NOTICE

When using the perpendicular parking (forward/reverse) function

- Make sure that there are no obstructions within the yellow guide lines and between the vehicle and target parking spot. If there are any obstructions between the vehicle and the target parking space, or between the yellow guide lines, cancel the function.
- As the target parking space will not be able to be set correctly if the surface of the parking space is on a slope or has differences in height, the vehicle may stray from the target parking space or be slanted. Therefore, do not use the function for this kind of parking spot.
- When parking in a narrow parking space, the vehicle may closely approach an adjacent parked vehicle. If a collision seems likely, depress the brake pedal to stop the vehicle.
- If a detected parked vehicle is narrow or parked extremely close to the curb, the position at which assistance will park the vehicle will also be close to the curb. If it seems likely the vehicle will collide with something or drive off of the road, depress

NOTICE

the brake pedal to stop the vehicle, and then press the Advance Park main switch to disable the system.

Advanced Park perpendicular exiting (forward/reverse) function

When exiting from a perpendicular parking space, if the system determines that exit is possible the perpendicular exiting (forward/reverse) function can be used. Also, depending on the surrounding environment, if it is necessary to change the direction of travel of the vehicle, the shift position can be shifted by assistance control.

Leaving a parking space using the perpendicular exiting (forward/reverse) function

1 **With the brake pedal depressed and P shift position selected, press the Advanced Park main switch and check that the exit direction selection screen is displayed on the center display.**

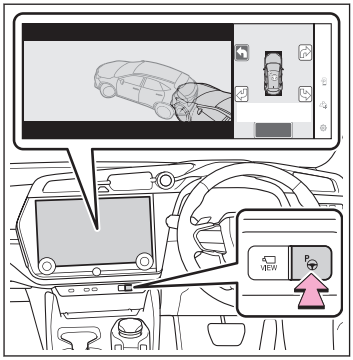

2 **Select an arrow on the center display to select the direction you wish to exit.**

If the turn signal lever is operated, only exit to the left or right can be selected.

3 **Depress the brake pedal and select [Start] button.**

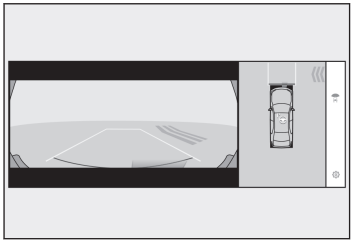

A buzzer will sound, an operation message will be displayed on the multi-information display, and assistance will begin operating.

To cancel assistance, press the Advanced Park main switch.

If assistance is canceled, **"Advanced Park Cancel"** will be displayed.

If you feel that the vehicle is approaching close to a surrounding vehicle, object, person, or gutter: →P.465

4 **Perform operations as indicated by the advice displays until the vehicle is in a position where exit is possible.**

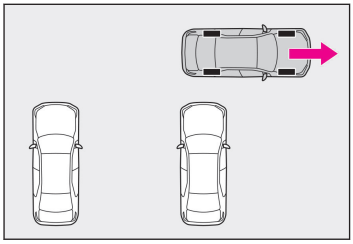

When the vehicle reaches a position where exit is possible, **"You can exit by moving the steering wheel"** will be displayed. If the steering wheel is operated, **"Advanced Park Finished"** will be displayed and assistance will end.

As assistance will end while the vehicle is moving, grip the steering wheel and drive forward.

If the steering wheel is not operated, the vehicle will stop at the exit position. Assistance can be ended by depressing the accelerator pedal or brake pedal.

INFORMATION

If you feel that the vehicle is approaching close to a surrounding vehicle, object, person, or gutter

→P.465

Perpendicular exiting (forward/reverse) function

Do not use exiting (forward/reverse) function in any situation other than when exiting a parallel parking spot. If assistance is started unintentionally, depress the brake pedal and stop the vehicle, then press the Advanced Park main switch to cancel assistance.

Situations in which the perpendicular exiting (forward/reverse) function will not operate

In situations such as the following, the perpendicular exiting (forward/reverse) function will not operate:

- When a vehicle which is waiting to park is in the exit direction



● When a wall, column, or person is detected as near a front or rear center or corner sensor



■ **When the brakes have been operated**

→P.465

Advanced Park parallel parking function

The parallel parking function can be used if the target parking space can be detected when the vehicle is stopped close and aligned with the center of the parking space. Also, depending on the condition of the parking space, etc., if it is necessary to change the direction of travel of the vehicle, the shift position can be shifted by assistance control.

Parking using the parallel parking function

1 **Stop the vehicle with it aligned near the center of the target parking space.**

▶ **If there are parking space lines**

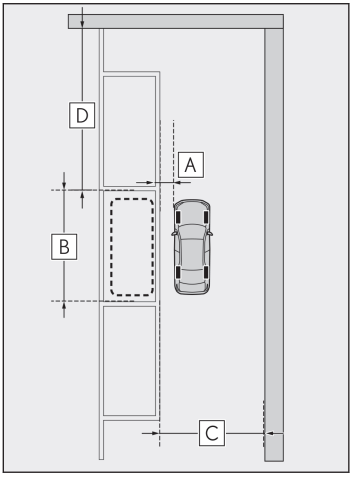

A Approximately 1 m (3.3 ft.)*1

B Approximately 6 m (19.7 ft.)*1

C Approximately 4.5 m (14.8 ft.) or more*1

D Approximately 8 m (26.2 ft.) or more*1

*1: This is a reference measurement for detection of a parking space. Depending on the surrounding environment, detection may not be possible.

▶ **If there is an adjacent parked vehicle**

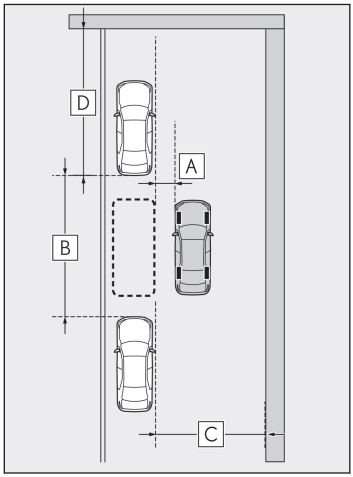

A Approximately 1 m (3.3 ft.)*1

B Approximately 7 m (23.0 ft.)*1

C Approximately 4.5 m (14.8 ft.) or more*1

D Approximately 8 m (26.2 ft.) or more*1

2 **Press the Advanced Park main switch and check that a possible parking space is displayed on the center display.**

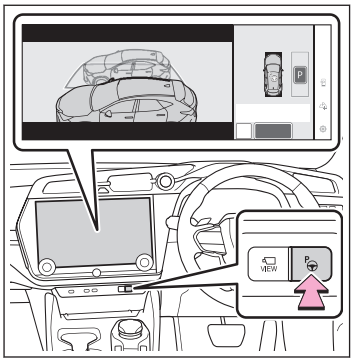

- If a space which your vehicle can be parked is detected, a target parking space box will be displayed.
- If it is possible to perpendicular parking (forward/reverse) in the space, select the parking space, and then select to change to the perpendicular parking (forward/reverse) function.
- Depending on the surrounding environment, it may not be possible to use this function. According to the information displayed on the center display, use the function on another parking space.

*1: This is a reference measurement for detection of a parking space. Depending on the surrounding environment, detection may not be possible.

3 **Select [Start] button.**

A buzzer will sound, an operation message will be displayed on the multi-information display, and assistance will begin operating.

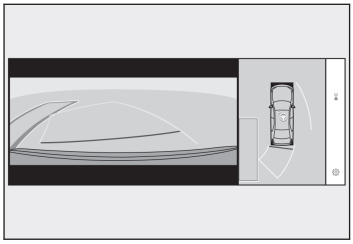

- When the brake pedal is released, **"Moving Forward..."** will be displayed and the vehicle will begin moving forward.
- To cancel assistance, press the Advanced Park main switch.

If assistance is canceled, **"Advanced Park Cancel"** will be displayed.

If you feel that the vehicle is approaching close to a surrounding vehicle, object, person, or gutter: →P.465

4 **Perform operations as indicated by the advice displays until the vehicle stops in the target parking space.**

When the vehicle stops, **"Advanced Park Finished"** will be displayed and parking assistance will end.

If you select on the center display, the vehicle displayed on the parking assist completion screen will rotate.

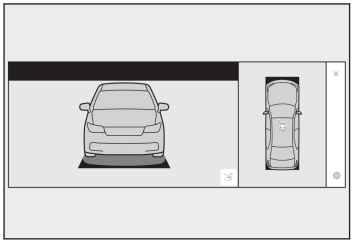

INFORMATION

If you feel that the vehicle is approaching close to a surrounding vehicle, object, person, or gutter

→P.465

If "No available parking space" is displayed

Even if the vehicle is stopped parallel to a parking space, an adjacent parked vehicle may not be detected. In this case, if the vehicle is moved to a position that a parked vehicle can be detected, assistance can be started.



When the brakes have been operated

→P.465

⚠ NOTICE

When using the parallel parking function

- Make sure that there are no obstructions within the yellow guide lines and between the vehicle and target parking spot. If any obstructions are detected within the yellow guide lines or between the vehicle and the target parking space, the parallel parking function will be cancelled or suspended.
- As the target parking space will not be able to be set correctly if the surface of the parking space is on a slope or has differences in height, the vehicle may stray from the target parking space or be slanted. Therefore, do not use the parallel parking function for this kind of parking spot.
- If an adjacent parked vehicle is narrow or parked extremely close to the curb, the position at which assistance will park the vehicle will also be close to the curb. If it seems likely the vehicle will collide with the curb or drive off of the road, depress the brake pedal to stop the vehicle, and then press the Advanced Park main switch to disable the system.

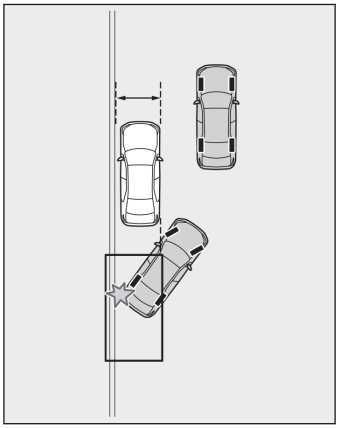

- If there is a wall or other barrier on the inner side of the parking space, the vehicle may stop at a position slightly outside of the set target parking space.

Advanced Park parallel exiting function

When exiting from a parallel parking space, if the system determines that exit is possible the parallel exiting function can be used. Also, depending on the surrounding environment, if it is necessary to change the direction of travel of the vehicle, the shift position can be shifted by assistance control.

Leaving a parking space using the parallel exiting function

1 **With the brake pedal depressed and P shift position selected, press the Advanced Park main switch and check that the exit direction selection screen is displayed on the center display.**

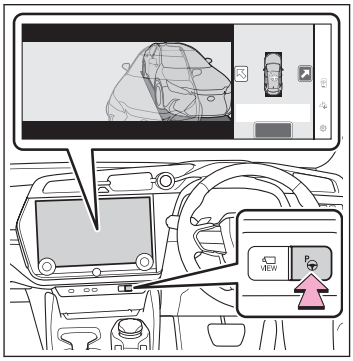

2 **Select an arrow on the center display to select the direction you wish to exit.**

If the turn signal lever is operated, only exit to the left or right can be selected.

3 **Depress the brake pedal and select [Start] button.**

A buzzer will sound, an operation message will be displayed on the multi-information display, and assistance will begin operating.To cancel assistance, press the Advanced Park main switch.

If assistance is canceled, **"Advanced Park Cancel"** will be displayed.

If you feel that the vehicle is approaching close to a surrounding vehicle, object, person, or gutter: →P.465

4 **Perform operations as indicated by the advice displays until the vehicle is in a position where exit is possible.**

When the vehicle reaches a position where exit is possible, **"You can exit by moving the steering wheel"** will be displayed. If the steering wheel is operated, **"Advanced Park Finished"** will be displayed and assistance will end.

As assistance will end while the vehicle is moving, grip the steering wheel and drive forward.

If the steering wheel is not operated, the vehicle will stop at the exit position. Assistance can be ended by depressing the accelerator pedal or brake pedal.

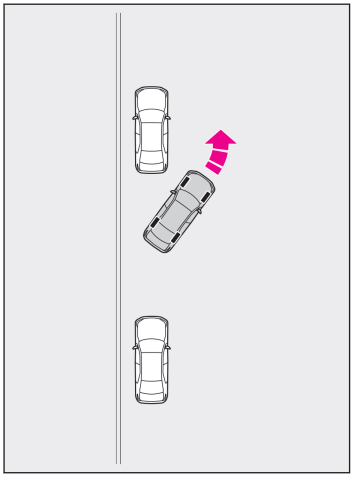

INFORMATION

If you feel that the vehicle is approaching close to a surrounding vehicle, object, person, or gutter

→P.465

Parallel exiting function

Do not use parallel exiting function in any situation other than when exiting a parallel parking spot. If assistance is started unintentionally, depress the brake pedal and stop the vehicle, then press the Advanced Park main switch to cancel assistance.

Situations in which the parallel exiting function will not operate

In situations such as the following, the parallel exiting function will not operate:

- When vehicles waiting at a traffic signal in the exit direction



- When a vehicle is stopped in the area behind where the vehicle will exit



- When a wall, column, or person is detected as near a front or rear side sensor



- When the vehicle has been parked on a curb and a side sensor detects the road surface



- When a vehicle is not parked in front of the vehicle
- When there is excessive space between the front of the vehicle and a parked vehicle

■ **When the brakes have been operated**

→P.465

Advanced Park memory function

The memory function can be used to park in a previously registered parking space, even if there are no parking space lines or adjacent parked vehicles.

Up to 3 parking spaces can be registered.

Registering a parking space

1 **Stop the vehicle with it aligned near the center of the target parking space.**

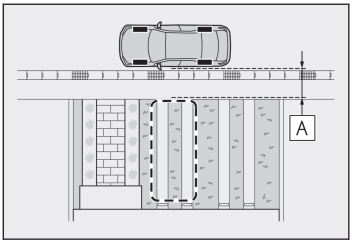

A Approximately 1 m (3.3 ft.)

2 **Press the main switch and then select P.**

If the Advanced Park main switch is pressed at a parking space without parking lines or any adjacent parked vehicles, **"No available parking space"** may be displayed. Continuously select and hold P.

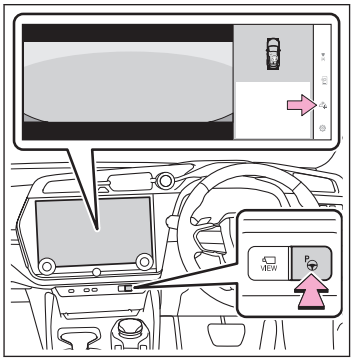

3 **Select perpendicular parking (forward/reverse) function or parallel parking function.**

Only parking spaces for which assist can be performed are displayed.

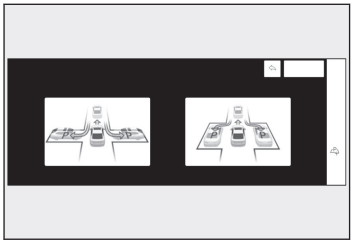

4 **Select the parking direction.**

When perpendicular parking (forward/reverse) was selected in step 3:

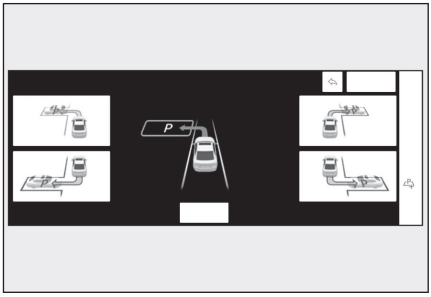

When parallel parking was selected in step 3:

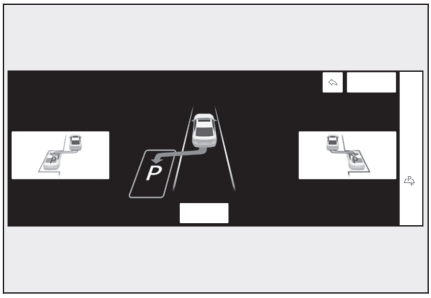

5 **Using the arrow buttons, adjust the position of the parking space to be registered, and then select [OK] button.**

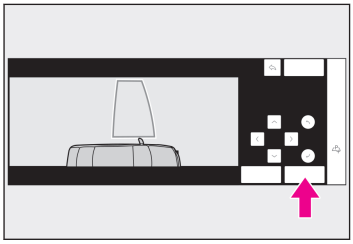

6 **Select [Start] button.**

A buzzer will sound, an operation message will be displayed on the multi-information display, and assistance will begin operating.When the brake pedal is released, **"Moving Forward..."** will be displayed and the vehicle will begin moving forward.

If you feel that the vehicle is approaching close to a surrounding vehicle, object, person, or gutter: →P.465

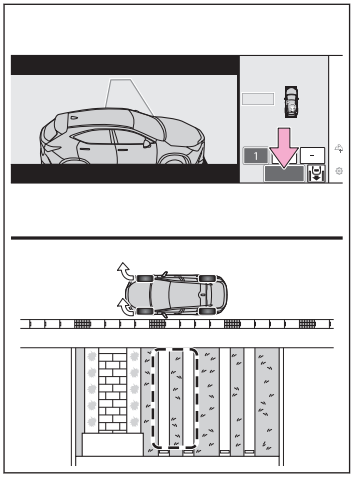

7 **Perform operations as indicated by the advice displays until the vehicle stops in the target parking space.**

8 **Check the position that the vehicle has stopped. If necessary, adjust the position of the parking spot to be registered using the arrow buttons, and then select [Reg.] button.**

"Registration Completed" will be displayed on the center display.

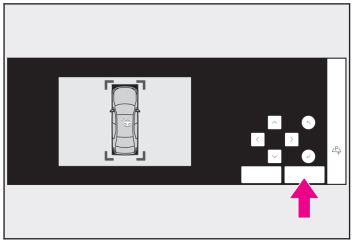

- Register the parking space only if there are no obstructions within the area shown by the thick lines.
- The amount that the position of the parking spot to be registered can be adjusted is limited.

When parking in a parking space registered to the memory function

1 **Stop the vehicle with it aligned near the center of the target parking space.**

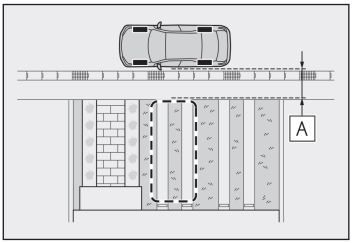

A Approximately 1 m (3.3 ft.)

2 **Press the Advanced Park main switch and check that a possible parking space is displayed on the center display.**

If the [MODE] button is displayed, the button can be touched to change between the memory function, perpendicular parking (forward/reverse) function and parallel parking function.

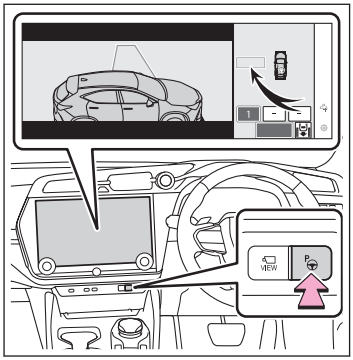

3 **Select the desired parking space, and then select [Start] button.**

Perform the procedure for the perpendicular parking (forward/reverse) function from step 3. (→P.463)

INFORMATION

If you feel that the vehicle is approaching close to a surrounding vehicle, object, person, or gutter

→P.465

When overwriting a registered parking space



If the maximum number of parking spaces have been registered and P is selected, a registered parking space can be selected and then overwritten with a new parking space.

When multiple parking spaces are registered



Select the desired parking space, and then select [Start] button.

When the brakes have been operated

→P.465

⚠ NOTICE

When using the memory function (→P.465,471)

- The memory function is a function which provides assistance in parking in a previously registered parking space. If the condition of the road surface, vehicle, or surrounding area differs from when registration was performed, the parking space may not be able to be detected correctly or assistance may not be provided to the point that the vehicle is fully parked.
- Do not register a parking space in situations such as the following, as the set parking space may not be able to be registered or assistance may not be possible later.
  - When a camera lens is dirty or covered with water droplets
  - When it is raining or snowing
  - When the surrounding area is dark (at night, etc.)
- In situations such as the following, it may not be possible to register a parking space.
  - When there is insufficient space between the road and parking space
  - When the road surface around the parking space does not have any differences the system can recognize
- If a parking space has been registered in situations such as the following, assistance may not be able to be started later or assistance to the registered position may not be possible.
  - When shadows are cast on the parking space (there is a carport over the parking space, etc.)



  - When there are leaves, garbage, or other objects which will likely move, in the parking space
  - When the road surface around the parking space has the same repeating pattern (brick, etc.)



⚠ NOTICE

- In situations such as the following, it may not be possible for the system to provide assistance to a registered parking spot:
  - When the appearance of the parking space is affected by the shadow of the vehicle or trees
  - When an object is detected in the registered parking space
  - When a pedestrian or passing vehicle is detected during assistance
  - When the position the vehicle is stopped when assistance is started differs from the position when registration was performed
  - When the registered parking space cannot be reached due to the existence of parking blocks, etc.
  - When the road surface around the parking space has changed (road surface has degraded or been resurfaced)
  - When the sunlight conditions differ from when registration was performed (due to weather or time of day)
  - When the sun is shining directly into a camera, such as in the early morning or evening
  - When the color or brightness of the road surface is uneven
  - When a light is temporarily shined on the parking space (lights of another vehicle, security light, etc.)
  - When the road surface around the parking space has the same repeating pattern
  - When there is a low protrusion on the road surface near the parking space
  - When the parking space is on a slope
  - When a camera has been splashed by hot or cold water and the lens has fogged up
  - When a camera lens is dirty or covered with water droplets
  - When accessories which obstruct the view of the camera are installed

  If assistance is ended during registration, perform registration again.
- When registering a parking space to the memory function, if the road surface cannot be detected **"No available parking space to register"** will be displayed.
- When using the memory function, make sure to stop immediately in front of the stop position. Otherwise the parking space may not be able to be detected correctly or assistance may not be provided to the point that the vehicle is fully parked.
- Do not use the memory function if a camera has been subjected to a strong impact or images of the panoramic view monitor are misaligned.

⚠ NOTICE

- If a camera has been replaced, as the installation angle of the camera will have changed, it will be necessary to reregister parking spaces of the memory function.

Advanced Park cancelation/suspension

■ Assistance will be canceled when

In situations such as the following, Advanced Park operation will be canceled. Firmly hold the steering wheel and depress the brake pedal to stop the vehicle.

As system operation has been canceled, begin the operation again or continue parking manually, using the steering wheel.

- The Advanced Park main switch is pushed
- The shift position has been shifted to P
- The parking brake is engaged
- A door or the back door is opened
- The driver's seat belt is unfastened
- The outside rear view mirrors are folded
- The TRC or VSC is turned off
- The TRC, VSC or ABS operates
- The power switch is pressed
- The system determines assistance cannot be continued in the current parking environment
- The system malfunctions
- While the vehicle was stopped, [Cancel] was selected on the center display

■ Assistance will be suspended when

In situations such as the following, Advanced Park operation will be suspended.

Assistance can be started again by following the directions displayed on the center display.

Also, when assistance is suspended, if the shift position is shifted twice with the brake pedal depressed, assistance will be canceled in that shift position.

However, if assistance is suspended by shifting the shift position, assistance will be canceled if the shift position is shifted once.

- The steering wheel is operated
- The accelerator pedal is depressed

- The shift position has been shifted
- A moving object or stationary object that may collide with your vehicle has been detected, resulting in the operation of the EV system output control/braking control.
- Camera switch is pressed

Changing the Advanced Park settings

Select ⚙ on the center display, and then select [Advanced Park].

■ Speed Profile

The vehicle speed for when assistance is performed can be set.

This setting cannot be changed when registering a parking space to the memory function.

■ Obstacle detection range

The distance from which obstacles will be avoided while assistance is being performed can be set.

■ Preferred parking method

The preferred parking direction displayed when at a parking space which perpendicular (forward/reverse) or parallel parking is possible can be set.

■ Preferred parking direction

The preferred parking direction displayed when it is possible to pull perpendicular forward or reverse into a parking space can be selected.

■ Preferred exit direction (perpendicular)

The preferred exit direction displayed when it is possible to pull forward or reverse to the left or right out of a parking space can be selected.

■ Preferred exit direction (parallel)

The preferred exit direction displayed when it is possible to exit to the left or right from a parallel parking space can be selected.

■ Camera view when parking

The display angle of the camera image when using the perpendicular parking (forward/reverse) function or parallel parking function can be set.

■ Camera view when exiting

The display angle of the camera image when using the perpendicular exiting (forward/reverse) function or parallel parking exit function can be set.

■ Parking path adjustment

The course for when parking assistance is operating can be adjusted inward or outward.

If the tires are worn, the path of vehicle may be offset from the center of the parking space. In this case, use this setting to adjust the parking course.

■ Road width adjustment

When parking assistance is started, the amount of lateral movement while the vehicle is moving forward can be adjusted.

■ Park position adjustment (forward)

The position at which perpendicular parking (forward) is completed can be adjusted. (Except when using the memory function.)

■ Park position adjustment (reverse)

The position at which perpendicular parking (reverse) is completed can be adjusted. (Except when using the memory function.)

■ Rear accessory setting

If an accessory, such as a trailer hitch, has been installed to the rear of the vehicle, the length of the rear of the vehicle can be adjusted to help avoid colliding with objects to the rear of the vehicle.

■ Clear registered parking space

The parking spaces registered to the memory function can be deleted. Parking space information cannot be deleted when assistance is being performed or when registering parking space information to the memory function.

⚠ NOTICE

- Take care when using the park position adjustment (forward) or park position adjustment (reverse) for adjusting because the vehicle may collide with parking blocks, curb stones, or other low objects.
- If it is likely that your vehicle will collide with a nearby vehicle/object, parking block, curb stone, etc., depress the brake pedal to stop the vehicle and press the Advanced Park main switch to disable the system.

Advanced Park displayed messages

The operating state, assistance operation, etc. of the Advanced Park is displayed on the center display. If a message is displayed, respond according to the content displayed.

INFORMATION

If "No available parking space" is displayed

Move the vehicle to a location where a parking space or parking lines can be detected.

If "Unavailable in current condition" is displayed

Move the vehicle to another location and use the system.

If "Not enough space to exit" is displayed

The parallel parking exit function cannot be used due to a situation such as the distance between your vehicle and vehicles parked in front of and behind your vehicle being short, the existence of an object in the exit direction, etc.

Check the conditions of the area around your vehicle and exit from the parking space manually.

If "Cannot control speed" is displayed

The system judged that it cannot adjust the speed of the vehicle when using the system in an area with a slope or step and assistance was canceled.

Use the system in a level location.

If "Obstacle detected" is displayed

As a moving object or stationary object that may collide with your vehicle has been detected, the EV system output control/braking control operates to suspend Advanced Park assistance.

Check the condition of the surrounding area. To resume assistance, select the [**Start**] button on the center display.

If "No available parking space to register" is displayed

This message is displayed when  is selected at a parking space that cannot be detected.

Operate the system at a parking space where differences in the road surface can be recognized. (→P.474)

EV system output restriction when the accelerator pedal and brake pedal are depressed at the same time

Purpose of the brake override system

If the accelerator pedal and brake pedal are depressed at the same time, the brake override system may operate and restrain the EV system output. A warning message is displayed on the multi-information display while the system is operating.

⚠ WARNING

To avoid depressing the wrong pedal, become familiar with the location of the brake pedal and accelerator pedal before driving the vehicle.

If the accelerator pedal is mistaken for the brake pedal and depressed, the vehicle may suddenly start off.

⚠ NOTICE

Do not depress the accelerator pedal and brake pedal at the same time while driving, as this may cause the EV system output to be restrained.

Sudden start restraint control

Sudden start restraint control (Drive-Start Control [DSC])

When the following unusual operation is performed with the accelerator pedal depressed, the EV system output may be restrained.

- When the shift position is shifted to R*1
- When the shift position is shifted from P or R to forward drive shift position such as D*1

When the system operates, a message appears on the multi-information display. Read the message and follow the instruction.

A warning light comes on while the system is operating.

INFORMATION

Drive-Start Control (DSC)

When the TRC is turned off (→P.332), sudden start restraint control also does not operate. If your vehicle have trouble escaping from the mud or fresh snow due to sudden start restraint control operation, deactivate TRC (→P.332) so that the vehicle may become able to escape from the mud or fresh snow.

*1: Depending on the situation, the shift position may not be changed.

Reducing impact to passengers in a collision

Seat belt pretensioners (front and outboard rear seats)

When the vehicle is subjected to a severe frontal or side impact, the pretensioners retract the seat belts of the front seats and rear outer seats to securely restrain the occupants.

The pretensioners will not operate in minor frontal or side impacts, rear impacts, or vehicle rollovers.

INFORMATION

Replacing the belt after the pretensioner has been activated

If the vehicle is involved in multiple collisions, the pretensioner will activate for the first collision, but will not activate for the second or subsequent collisions.

PCS-linked control

If the PCS (Pre-Collision System) determines that the possibility of a collision with a vehicle is high, the seat belt pretensioners will be prepared to operate.

⚠ WARNING

Seat belt pretensioners

If a pretensioner has operated, the SRS warning light will illuminate. In this situation, the seat belt cannot be used and must be replaced by your Lexus dealer. Failure to do so may result in death or serious injury.

SRS airbags

The SRS airbags deploy when the vehicle is subjected to certain types of severe impact that may cause significant injury to the occupants. The airbags work together with the seat belts to help reduce the risk of death or serious injury.

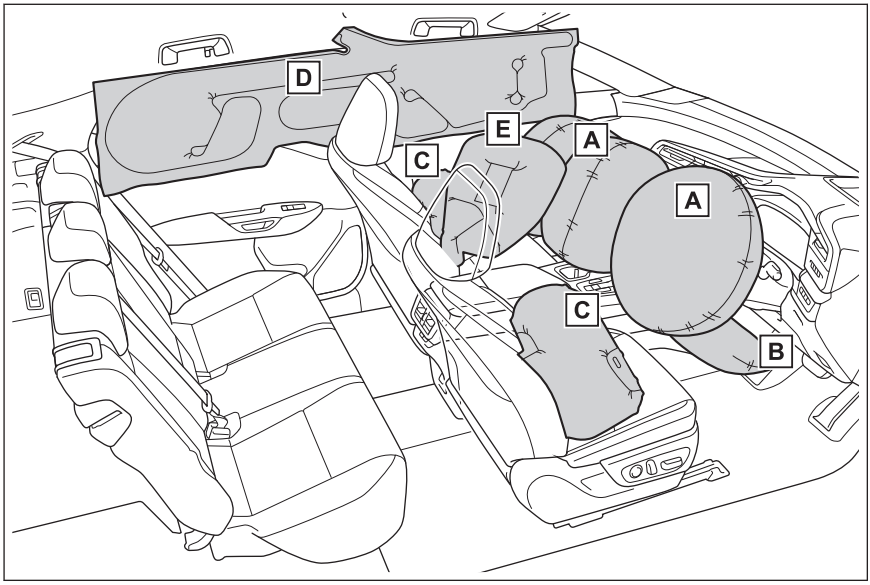

A SRS driver airbag/front passenger airbag

Help reduce impact to the head and chest of the driver and front passenger

B SRS knee airbags

Help reduce impact to the driver and front passenger

C SRS side airbags

Help reduce impact to the chest of the occupants of the front seats

D SRS curtain shield airbags

Help reduce impact to the heads of the occupants of the front and rear outer seats

E SRS front center airbags

Help reduce impact to the head and neck of the occupants of the front seats

The main SRS airbag system components are shown above. The SRS airbag system is controlled by the airbag sensor assembly. As the airbags deploy, a chemical reaction in the inflators quickly fills the airbags with non-toxic gas to help restrain the motion of the occupants.

INFORMATION

If the SRS airbags deploy (inflate)

- Slight abrasions, burns, bruising, etc., may be sustained from SRS airbags, due to the extremely high speed of deployment (inflation) by hot gases.
- A loud noise and white powder will be emitted.

- Parts of the airbag module (steering wheel hub, airbag cover and inflator) as well as the parts around the airbags may be hot for several minutes. The airbag itself may also be hot.
- The windshield may crack.
- The EV system will be stopped. (→P.31)
- All of the doors will be unlocked.
- The brakes and stop lights will be controlled automatically. (→P.331)
- The interior lights will turn on automatically. (→P.270)
- The emergency flashers will turn on automatically. (→P.563)
- Vehicles with Lexus Connected Services: If any of the following situations occur, the system is designed to send an emergency call to the response center, notifying them of the vehicle's location (without needing to push the [SOS] button) and an agent will attempt to speak with the occupants to ascertain the level of emergency and assistance required. If the occupants are unable to communicate, the agent automatically treats the call as an emergency and helps to dispatch the necessary emergency services. (→P.496)
  - When an SRS airbag has been deployed
  - When a seat belt pretensioner has operated
  - When the vehicle has been involved in a severe rear-end collision

The SRS airbags deploy in a frontal impact when

- The following SRS airbags will deploy in the event of an impact that exceeds a threshold level (level of force corresponding to an approximately 20 - 30 km/h [12 - 18 mph] frontal collision with a fixed wall that does not move or deform):
  - SRS front airbags
  - SRS knee airbags
- The threshold level at which the SRS airbags will deploy will be higher than normal in the in the following situations:
  - When the vehicle collides with an object, such as a parked vehicle or sign pole, which moves or deforms on impact
  - If the vehicle is involved in an underride collision, such as a collision in which the front of the vehicle "underrides", or goes under, the bed of a truck
- Depending on the type of collision, only the following may deploy:
  - Seat belt pretensioners
- In the event of an especially severe frontal collision, the left and right SRS curtain shield airbags may also deploy.

The SRS airbags deploy in a side impact when

- The following SRS airbags will deploy in the event of an impact that exceeds the set threshold level (level of force corresponding to the impact force produced by an approximately 1500 kg [3300 lb.] vehicle colliding with the passenger compartment at a perpendicular angle at an approximate speed of 20 - 30 km/h [12 - 18 mph]):
  - SRS side airbags
  - SRS curtain shield airbags
  - SRS front center airbags

The SRS airbags deploy in an underside impact when

- The following airbags may deploy if the underside of the vehicle collides with a hard object:
  - SRS front airbags
  - SRS knee airbags
  - SRS side airbags
  - SRS curtain shield airbags



The SRS side airbags will not deploy when

- The following SRS airbags will not normally deploy in side or rear collisions, vehicle rollovers, or low speed frontal collisions. However, if such a collision causes sufficient sudden deceleration, the SRS airbags may deploy.
  - SRS front airbags
  - SRS knee airbags



- The following SRS airbags may not deploy if the vehicle is collided with at a certain angle or in a side collision where an area of the vehicle other than the passenger compartment is collided with:
  - SRS side airbags
  - SRS curtain shield airbags
  - SRS front center airbags



- The following SRS airbags will not normally deploy in front or rear collisions, vehicle rollovers, or low speed side collisions:
  - SRS side airbags
  - SRS front center airbags



- The following SRS airbags will not normally deploy in rear collisions, end over end vehicle rollovers, or low speed front or side collisions:
  - SRS curtain shield airbags



When to contact your Lexus dealer

In the following situations, the vehicle will require inspection and/or repair. Contact your Lexus dealer as soon as possible.

- When any of the SRS airbags have been deployed
- When the front of the vehicle is damaged or deformed, or was involved in a collision that was not severe enough to cause any of the following SRS airbags to deploy:
  - SRS front airbags
  - SRS knee airbags



- When a door or its surrounding area is damaged, deformed or has had a hole made in it, or was involved in a collision that was not severe enough to cause any of the following SRS airbags to deploy:
  - SRS side airbags
  - SRS curtain shield airbags
  - SRS front center airbags



- When the pad section of the steering wheel, the dashboard near the front passenger SRS airbag or the lower side of the instrument panel is scratched, cracked, or otherwise damaged.

- When the surface of a seat with an SRS side airbag or SRS front center airbag is scratched, cracked, or otherwise damaged.
- When the part of a front pillar, rear pillar or roof side rail garnish (padding) which covers a SRS curtain shield airbag is scratched, cracked, or otherwise damaged.

⚠ WARNING

■ SRS airbag precautions

Observe the following precautions. Failure to do so may result in death or serious injury.

- The driver and all passengers must wear their seat belts correctly. The SRS airbags are supplemental devices to be used with the seat belts.
- The SRS driver airbag deploys with considerable force, and can cause death or serious injury, especially if the driver is very close to the airbag.Since the risk zone for the driver's airbag is the first 50-75 mm (2-3 in.) of inflation, placing yourself 250 mm (10 in.) from your driver airbag provides you with a clear margin of safety. This distance is measured from the center of the steering wheel to your breastbone. If your current driving position places you less than 250 mm (10 in.) away from the driver airbag, you can change your driving position in several ways:
  - Move your seat to the rear as far as possible while still being able to reach the pedals comfortably.
  - Slightly recline the seatback. Although vehicle designs vary, many drivers can achieve the 250 mm (11 in.) distance, even with the driver seat all the way forward, simply by reclining the seatback somewhat. If reclining the seatback makes it hard to see the road, raise yourself by using a firm, non-slippery cushion, or raise the seat if your vehicle has that feature.
  - If your steering wheel is adjustable, tilt it downward. This points the airbag toward your chest instead of your head and neck. The seat should be adjusted as recommended above, while still being able to control the vehicle with the pedals and steering wheel, and maintaining your view of the instrument panel controls.
- The SRS front passenger airbag deploys with considerable force, and can cause death or serious injury, especially if the front passenger is very close to the airbag. The front passenger seat should be positioned as far possible from the airbag with the seatback adjusted so that the passenger is sat upright.
- Improperly seated and/or restrained infants and children can be killed or seriously injured by a deploying airbag. An infant or child who is too small to use a seat belt should be properly secured using a child restraint system. Lexus strongly recommends that all infants and children be placed in the rear seats of the vehicle and properly restrained. The rear seats are safer for infants and children than the front passenger seat. (→P.73)

⚠ WARNING

- Do not sit on the edge of the seat or lean against the dashboard.



- Do not allow a child to stand in front of the SRS front passenger airbag or sit on the lap of a front passenger.
- Front seat occupants should never hold items on their lap.



- Do not lean against the door, roof side rail, or front, side, or rear pillar.



- Do not allow anyone to kneel on a seat toward the door or put their head or hands outside the vehicle.



⚠ WARNING

- Do not attach anything to or lean anything against areas such as the dashboard, steering wheel pad and lower portion of the instrument panel.



- Do not attach anything to areas such as the doors, windshield, side windows, front or rear pillars, roof side rails and assist grips. (With the exception of the speed limit label: →P.606)



- Do not hang coat hangers or other hard objects on the coat hooks. These items could become projectiles if the SRS curtain shield airbags deploy, possibly leading to death or serious injury.
- If a vinyl cover is attached to the area where the SRS knee airbag deploys, be sure to remove it.
- Do not use seat accessories which cover the parts from which the SRS airbags deploy, as they may interfere with inflation of the SRS airbags. Such accessories may prevent the SRS airbags from deploying correctly, may disable the system or cause the SRS airbags to inflate unintentionally, possibly resulting in death or serious injury.
- Do not strike or apply significant force to the SRS airbag system components, front doors or their surrounding area. Doing so may cause the SRS airbags to malfunction.
- Do not touch any components of the SRS airbags immediately after the SRS airbags have deployed (inflated) as they may be hot.
- If breathing becomes difficult after the SRS airbags have deployed, open a door or window to allow fresh air in, or leave the vehicle if it is safe to do so. Wash off any residue as soon as possible to prevent skin irritation.
- If a part where an SRS airbag is stored is damaged or cracked, have it replaced by your Lexus dealer.

Modification and disposal of SRS airbag system components

Do not dispose of your vehicle or perform any of the following modifications without consulting your Lexus dealer.

⚠ WARNING

The SRS airbags may malfunction or deploy unintentionally, possibly leading to death or serious injury.

- Removal, installation, disassembly or repair of the SRS airbags
- Repair, removal or modification of the following parts or their surrounding
  - Steering wheel
  - Instrument panel
  - Dashboard
  - Seats
  - Seat upholstery
  - Front pillars
  - Side pillars
  - Rear pillars
  - Roof side rails
  - Front door panels
  - Front door trim
  - Front door speakers
- Modifications to the front door panels (such as making holes in them)
- Repair or modification of the following parts or their surrounding
  - Front fender
  - Front bumper
  - Sides of the vehicle interior
- Installation of the following parts or accessories
  - Bull bars or kangaroo bars
  - Snow plows
  - Winches
- Modifications to the vehicle's suspension
- Installation of electronic devices such as mobile two-way radios (RF-transmitter) and CD players

7 Wireless communication

7-1. Emergency assistance

Lexus Connected Services.....496

Lexus Connected Services**1

Lexus Connected Services are telematics services that use Global Positioning System (GPS) data and embedded cellular technology to enable the following emergency calls to be made: ACN (Automatic Collision Notification) and SOS Emergency Call (Manual emergency service notification) (by pressing the [SOS] button). For more information about Lexus Connected Services, please visit: https://www.lexus.com.au/connectivity

Lexus Connected Services system components

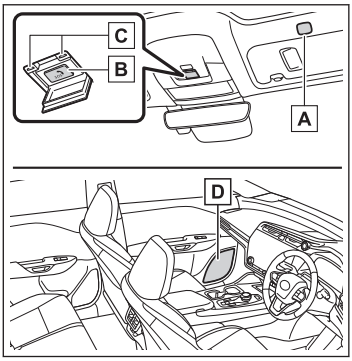

A Microphone
B [SOS] button*2
C Indicator lights
D Speaker

Type of Lexus Connected Services

■ ACN (Automatic Collision Notification)

If any airbag deploys, the system is designed to automatically call the Emergency Call Centre. The Call Centre Agent will determine your vehicle's location, the time of the incident and the vehicle VIN, and attempt to speak with the vehicle occupants to assess the situation. If the occupants are unable to communicate, the Call Centre Agent automatically treats the call as an emergency and contacts emergency services to describe the situation and request that assistance be sent to the location.
*3

*: If equipped

*1: Operates within the Lexus Connected Services coverage.

*2: This button is intended for communication with the Emergency Call Centre.Other [SOS] buttons available in other systems of a motor vehicle do not relate to the device and are not intended for communication with the Emergency Call Centre.

*3: In some cases, the call cannot be made. (→P.497)

SOS Emergency Call (Manual emergency service notification)

In the event of an emergency, press the [SOS] button to call the Emergency Call Centre. *1 The Call Centre Agent will determine your vehicle's location, assess the situation, and dispatch the necessary assistance required.

Make sure to open the cover before pressing the [SOS] button.

If you accidentally press the [SOS] button, tell the Call Centre Agent that you are not experiencing an emergency.

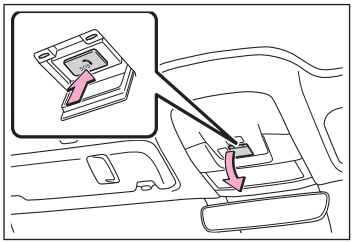

Lexus Connected Services indicator lights

When the power switch is turned to ON, the red/green indicator lights will blink intermittently, then the green indicator light will remain ON, indicating that the system is enabled. The indicator lights indicate the following:

- If the green indicator light illuminates and stays on, the system is enabled.
- If the green indicator light flashes twice per second, the ACN/SOS service is being made.
- If the red indicator light illuminates at any time other than immediately after the power switch is turned to ON, the system may be malfunctioning or the backup battery may be depleted. Contact your Lexus dealer.

INFORMATION

Free/Open Source Software Information

This product contains Free/Open Source Software (FOSS). The license information and/or the source code of such FOSS can be found at the following URL.

http://www.opensourceautomotive.com/dcm/19MC/

WARNING

When the ACN/SOS may not be made

- It may not be possible to make ACN/SOS in any of the following situations. In such cases, report to emergency services provider (000 system etc.) by other means such as nearby public phones.

*1: In some cases, the call cannot be made. (→P.497)

⚠ WARNING

- Even when the vehicle is in the cellular phone service area, it may be difficult to connect to the Emergency Call Centre if the reception is poor or the line is busy. In such cases, you may not be able to connect to the Emergency Call Centre.
- When the vehicle is out of the cellular phone service area, the ACN/SOS cannot be made.
- When any related equipment (such as the [SOS] button panel, indicator lights, microphone, DCM, antenna, or any wires connecting the equipment) is malfunctioning, damaged or broken, the ACN/SOS cannot be made.
- Enabled Lexus vehicles collect and transmit vehicle data to provide connected services. SOS and Automatic Collision Notification may be disabled if green LED under SOS button is not illuminated. For more info including reactivation, visit https://www.lexus.com.au/privacy
- During an ACN/SOS service, the system makes repeated attempts to connect to the Emergency Call Centre. However, if it cannot connect to the Emergency Call Centre due to poor radio wave reception, the system may not be able to connect to the cellular network and the call may finish without connecting. A voice prompt notification will play from the vehicle speaker to indicate call disconnection.

- If the 12-volt battery's voltage decreases or there is a disconnection, the system may not be able to connect to the Emergency Call Centre.
- The ACN/SOS system might not work outside of Australia region, depending on the available infrastructure in the country.

When the ACN/SOS system is replaced with a new one

The ACN/SOS system should be registered. Contact your Lexus dealer.

For your safety

- Please drive safely. The function of this system is to assist you in contacting the appropriate emergency services in case of accidents such as traffic accidents or sudden medical emergencies, and it does not protect the driver or passengers in any way. Please drive safely and fasten your seatbelts at all times for your safety.
- In case of an emergency, ensure preservation of life is prioritised first.
- If you smell anything burning or other unusual smells, leave the vehicle and evacuate to a safe area immediately.
- If the airbags deploy when the system is operating normally, the system makes emergency call. The system also makes emergency call when the vehicle is struck from the rear or rolls over, even if the airbags do not deploy.
- For safety, do not press the [SOS] button while driving. Making calls during driving may cause mishandling of the steering wheel, which may lead to unexpected

⚠ WARNING

accidents. Stop the vehicle and confirm the safety of your surroundings before pressing the [SOS] button.

- When changing fuses, please use the specified fuses. Using other fuses may cause ignition or smoke in the circuit and lead to a fire.
- Using the system while there is smoke or an unusual smell may cause a fire. Stop using the system immediately and consult your Lexus dealer.

⚠ NOTICE

■ To prevent damage

Do not pour any liquids onto the [SOS] button panel, etc. and do not impact it.

■ If the [SOS] button panel, speaker or microphone malfunctions during an ACN/SOS service

It may not be possible to make ACN/SOS, confirm the system status, or communicate with the Call Centre Agent. If any of the above equipment is damaged, please consult your Lexus dealer.

8 Maintenance and care

8-1. Exterior maintenance and care

Washing the vehicle 502

8-2. Cleaning and protecting the vehicle interior

Cleaning the vehicle interior .. 508

Cleaning the synthetic leather areas 510

8-3. Maintenance

Maintenance requirements..... 511

Scheduled maintenance outline 512

Do-it-yourself maintenance 513

8-4. Inspection of consumables

Do-it-yourself service precautions 514

Opening the hood 517

Motor compartment 519

Adding washer fluid 526

Air conditioning filter maintenance 527

8-5. Tire maintenance

Tire maintenance 531

Tire inspection items..... 532

Operation of the tire pressure warning system..... 534

Checking tire inflation pressure..... 545

Lifting the vehicle with a floor jack 547

Rotating the tires..... 548

Wheels..... 549

Replacing the tire 551

Washing the vehicle

⚠ WARNING

Do not apply water to the inside of the motor compartment.

Doing so may cause the electrical components, etc. to catch fire.

⚠ NOTICE

■ **To prevent paint deterioration and corrosion of the body and components (wheels, etc.)**

- Wash the vehicle immediately in the following cases:
  - After driving near the sea coast
  - After driving on salted roads
  - If coal tar or tree sap is present on the paint surface
  - If dead insects, insect droppings or bird droppings are present on the paint surface
  - After driving in an area contaminated with soot, oily smoke, mine dust, iron powder or chemical substances
  - If the vehicle becomes heavily soiled with dust or mud
  - If liquids such as benzine or gasoline are spilled on the paint surface
- If the paint is chipped or scratched, have it repaired immediately.
- To prevent the wheels from corroding, remove any dirt and store in a place with low humidity when storing the wheels.

■ **To prevent damage to the windshield wiper arms**

When lifting the wiper arms away from the windshield, pull the driver side wiper arm upward first, and repeat for the passenger side. When returning the wipers to their original position, do so from the passenger side first.

Perform cleaning in a manner appropriate to each component and its material.

- Working from top to bottom, liberally apply water to the vehicle body, wheel wells and underside of the vehicle to remove any dirt and dust.
- Wash the vehicle body using a sponge or soft cloth, such as a chamois.
- For hard-to-remove marks, use car wash soap and rinse thoroughly with water.
- Wipe away any water.

INFORMATION

Self-restoring coat

The vehicle body has a self-restoring coating that is resistant to small surface scratches caused by a car wash, etc.

- The coating lasts for 5 to 8 years from when the vehicle is delivered from the plant.
- The restoration time differs depending on the depth of the scratch and outside temperature.

  The restoration time may become shorter when the coating is warmed by applying warm water.
- Deep scratches caused by keys, coins, etc., cannot be restored.
- Do not use waxes that contain abrasives.

When using a car wash

If the door handle becomes wet while the electronic key is within the effective range, the door may lock and unlock repeatedly. In that case, follow the following correction procedures to wash the vehicle:

- Place the key in a position 2 m (6 ft.) or more separate from the vehicle while the vehicle is being washed.

  Take care to ensure that the key is not stolen.
- Set the electronic key to battery-saving mode to disable the smart entry & start system.

Brake pads and calipers

Rust may form if the vehicle is parked with wet brake pads or disc rotors, causing them to stick. Before parking the vehicle after it is washed, drive slowly and apply the brakes several times to dry the parts.

Using an automatic car wash

NOTICE

When using an automatic car wash, move the wiper lever to the off position.

If the wiper lever is in the AUTO position, the wipers may operate unintentionally and the wiper blades may be damaged.

- Perform the following before washing your vehicle:
  - Fold the mirrors.
  - Turn off the power back door.

  Start washing from the front of the vehicle.

Extend the mirrors before driving.

- Brushes used in automatic car washes may scratch the vehicle surface, parts (wheel, etc.) and harm your vehicle's paint.
- Depending on the automatic car wash, the rear spoiler may become caught, preventing it from being washed or causing damage to it.
- When the shift position needs to be held in N, refer to P.182.

Using a high pressure washer to wash the vehicle

⚠ NOTICE

- When washing the vehicle, do not spray any of the cameras or their surrounding area directly. The shock from high pressure water may cause a camera to malfunction.
- Do not bring the tip of the nozzle close to connectors or the boots (rubber or resin cover) of the following parts.

  The parts may be damaged if sprayed by high-pressure water.
  - Drivetrain related parts
  - Steering parts
  - Suspension parts
  - Brake parts
- Keep the tip of the nozzle at least 30 cm (11.9 in.) away from the vehicle body. Otherwise resin parts, such as the moldings, bumpers, etc., may be deformed and damaged. Also, do not continuously spray water on the same place.
- Do not spray the lower part of the windshield continuously. If water enters the air conditioning system intake located near the lower part of the windshield, the air conditioning system may not operate correctly.
- Do not wash the underside of the vehicle using a high pressure car washer. If water enters the traction battery, the EV system may malfunction.
- Do not use the washer on the area around the charging port lid. Water could get into the charging inlet and could damage the vehicle.

When using a high pressure washer, as water may enter the cabin, do not bring the tip of the nozzle near the gaps around the doors or perimeter of the windows, or spray these areas continuously.

Cleaning the wheels and wheel ornaments

Perform the following:

- Remove any dirt immediately using a neutral cleaning agent.

- Wash detergent off with water immediately after use.
- To protect the finish from damage, make sure to observe the following precautions.
  - Do not use acidic, alkaline or abrasive cleaners
  - Do not use hard brushes
  - Do not use detergent on the wheels when they are hot, such as after driving or parking in hot weather

INFORMATION

Painted brake calipers

- When using detergent, use neutral detergent. Do not use hard brushes or abrasive cleaners, as they will damage the paint.
- Do not use detergent on the brake calipers when they are hot.
- Wash detergent off immediately after use.

Cleaning the bumpers

WARNING

If the paint of the front or rear bumper is chipped or scratched, the following systems may not function correctly. If this occurs, consult your Lexus dealer.

- Lexus Safety System +
- BSM (Blind Spot Monitor)
- Safe Exit Assist
- Lexus parking assist-sensor
- RCTA (Rear cross traffic alert)
- PKSB (Parking Support Brake)

Do not scrub with abrasive cleaners.

Cleaning and protecting the plated portions

If dirt cannot be removed, clean the parts as follows:

- Use a soft cloth dampened with an approximately 5 % solution of neutral detergent and water to clean the dirt off.
- Wipe the surface with a dry, soft cloth to remove any remaining moisture.
- To remove oily deposits, use alcohol wet wipes or a similar product.

Cleaning the exterior lights

NOTICE

- Wash carefully. Do not use organic substances or scrub with a hard brush.

  Doing so may damage the surface of the lights.
- Do not apply wax to the lights.

  Wax may damage the lenses.

Cleaning the windshield

WARNING

Move the wiper lever to the off position.

If the wiper lever is in the AUTO position, the wipers may operate unexpectedly in the following situations, possibly leading serious injury from a hand being caught, or damage to the wiper blades.



A Off
B AUTO

- When the upper part of the windshield where the raindrop sensor is located is touched by hand
- When a wet rag or similar is held close to the raindrop sensor
- If something bumps against the windshield
- If you directly touch the raindrop sensor body or if something bumps into the raindrop sensor

INFORMATION

Front side windows water-repellent coating

The effectiveness of the water-repellent coating can be extended by paying attention to the following.

- Remove any dirt, etc., from the front side windows regularly.
- Do not allow dirt and dust to accumulate on the windows.

If dirty, clean the windows with a soft, damp cloth as soon as possible.

- Do not use wax or glass cleaners that contain abrasives when cleaning the windows.
- Do not use any metallic objects to remove condensation build up.

Waxing the vehicle

Wax the vehicle when the waterproof coating has deteriorated.

If water does not bead on a clean surface, apply wax when the vehicle body is cool.

Cleaning aluminum parts

⚠ NOTICE

When cleaning the hood, do not push hard or put weight on it. The aluminum part may be dented.

Cleaning the vehicle interior

⚠ WARNING

■ Water in the vehicle

- Do not splash or spill liquid in the vehicle. Doing so may cause the electrical components, etc., to malfunction or catch fire.
- Do not get any of the SRS components or wiring in the vehicle interior wet.

  An electrical malfunction may cause the airbags to deploy or not function properly, resulting in death or serious injury.
- Vehicles with wireless charger: Do not let the wireless charger (→P.281) get wet. Failure to do so may cause the charger to become hot and cause burns or could cause electric shock resulting in death or serious injury.

■ Cleaning the interior (especially instrument panel)

Do not use wax polish or a polishing cleaner on the instrument panel. The instrument panel may reflect off the windshield, obstructing the driver's view and leading to an accident, resulting in death or serious injury.

■ To prevent burns

If the vehicle is left in direct sunlight for a long time, the underside of the glass roof* could become very hot and could cause burns.

⚠ NOTICE

■ Cleaning solvents

- Do not use the following cleaning solvents, as they may discolor the vehicle interior or cause streaks or damage to painted surfaces:
  - Areas other than the seats: Organic substances such as benzine or gasoline, alkaline or acidic solutions, dye, and bleach
  - Seats: thinner, benzine, alcohol, or alkaline or acidic solutions
- Do not use wax polish or a polishing cleaner. The painted surfaces of the instrument panel or other interior parts may be damaged.

■ Water on the floor

Do not wash the vehicle floor with water.

If water contacts audio system or other electrical components under the floor carpet, it may cause the vehicle to malfunction. Water may also cause the body to rust.

*: If equipped

NOTICE

When cleaning the inside of the windshield

Do not allow glass cleaner to contact the lens of the front camera. Also, do not touch the lens.

Cleaning the inside of the rear window

- Do not use glass cleaners to clean the rear window, as this may cause damage to the rear window defogger heater wires or antenna. Use a cloth dampened with lukewarm water to gently wipe the window clean. Wipe the window in strokes running parallel to the heater wires or antenna.
- Be careful not to scratch or damage the heater wires or antenna.

Cleaning the panoramic fixed moon roof glass*

When cleaning the panoramic fixed moon roof glass, do not use a compound or abrasive articles, such as a glass cleaner, detergent, wax, etc. Doing so may damage the coating.

- Remove dirt and dust using a vacuum cleaner. Wipe dirty surfaces with a cloth dampened with lukewarm water.
- If dirt cannot be removed, wipe it off with a soft cloth dampened with neutral detergent diluted to approximately 1%.

  Wring out any excess water from the cloth and thoroughly wipe off remaining traces of detergent and water.

INFORMATION

Shampooing the carpets

Excellent results can be obtained by keeping the carpet as dry as possible. When cleaning, use a commercially available foaming-type cleaner.

Use a sponge or brush to apply the foam and rub it in overlapping circles. Do not use water. Wipe the surface to remove the cleaner and dirt and let it dry.

Handling the seat belts

Clean with mild soap and lukewarm water using a cloth or sponge. Also check the belts periodically for excessive wear, fraying or cuts.

Handling precautions of the panoramic fixed moon roof glass (Low-E coating)*

- Do not rub the glass with a metal tool, etc.
- Note that applying film to the glass surface may damage the function of the coating.
- Note that attaching a sucker to the glass surface may cause suction marks to remain.

*: If equipped

Cleaning the synthetic leather areas

- Remove dirt and dust using a vacuum cleaner.
- Wipe it off with a soft cloth dampened with neutral detergent diluted to approximately 1%.
- Wring out any excess water from the cloth and thoroughly wipe off remaining traces of detergent and water.

Maintenance requirements

To ensure safe and economical driving, day-to-day care and regular maintenance are essential. Lexus recommends the following maintenance:

⚠ WARNING

■ If your vehicle is not properly maintained

Improper maintenance could result in serious damage to the vehicle and possible death or serious injury.

■ Handling of the 12-volt battery

12-volt battery posts, terminals and related accessories contain lead and lead compounds which are known to cause brain damage. Wash your hands after handling.

INFORMATION

■ Where to go for maintenance service?

It makes good sense to take your vehicle to your local Lexus dealer for service.

Lexus technicians are well-trained specialists receiving the latest service information through technical bulletins, service tips, and in-dealership training programs. They learn to work on Lexus before they work on your vehicle, rather than while they are working on it. Doesn't that seem like the best way?

Your Lexus dealer has invested a lot of money in special Lexus tools and service equipment. It helps them to do the job better and at less cost.

Your Lexus dealer's service department will perform all of the scheduled maintenance on your vehicle reliably and economically.

Scheduled maintenance outline

Scheduled maintenance should be performed at specified intervals according to the maintenance schedule.

For full details of your maintenance schedule, refer to the "Warranty and Service Booklet".

Do-it-yourself maintenance

What about do-it-yourself maintenance?

Many of the maintenance items are easy to do yourself if you have a little mechanical ability and a few basic automotive tools.

Note, however, that some maintenance tasks require special tools and skills. These are best performed by qualified technicians. Even if you are an experienced do-it-yourself mechanic, we recommend that repairs and maintenance be conducted by your Lexus dealer who will keep a record of maintenance on your vehicle. This record could be helpful should you ever require Warranty Service.

INFORMATION

Does your vehicle need repairs?

Be on the alert for changes in performance and sounds, and visual tip-offs that indicate service is needed. Some important clues are:

- Appreciable loss of power
- Strange noises
- A fluid leak under the vehicle

  However, water dripping from the air conditioning system after use is normal.
- Flat-looking tires, excessive tire squeal when cornering, uneven tire wear
- Vehicle pulls to one side when driven straight on a level road
- Strange noises related to suspension movement
- Loss of brake effectiveness, spongy feeling brake pedal, pedal almost touches the floor, vehicle pulls to one side when braking

If you notice any of these clues, take your vehicle to your Lexus dealer as soon as possible. Your vehicle may need adjustment or repair.

Do-it-yourself service precautions

If you perform maintenance by yourself, be sure to follow the correct procedure as given in the section for each part.

⚠ WARNING

The motor compartment contains many mechanisms and fluids that may move suddenly, become hot, or become electrically energized. To avoid death or serious injury, observe the following precautions.

■ When working on the motor compartment

- Make sure that "POWER ON" on the multi-information display and the "READY" indicator are both off.
- Keep hands, clothing and tools away from the moving fan.
- Be careful not to touch the motor, power control unit, radiator, etc., right after driving as they may be hot. Coolant and other fluids may also be hot.
- Do not leave anything that may burn easily, such as paper and rags, in the motor compartment.
- Do not smoke, cause sparks or expose an open flame to the 12-volt battery. 12-volt battery fumes are flammable.
- Never touch, disassemble, remove or replace the high voltage parts, cables and their connectors. It can cause severe burns or electric shock that may result in death or serious injury.
- Take care because brake fluid can harm your hands or eyes and damage painted surfaces. If fluid gets on your hands or in your eyes, flush the affected area with clean water immediately. If you still experience discomfort, consult a doctor.

■ When working near the electric cooling fan or radiator grille

Be sure the power switch is OFF.

With the power switch in ON, the electric cooling fan may automatically start to run if the air conditioning is on and/or the coolant temperature is high.

■ Safety glasses

Wear safety glasses to prevent flying or falling material, fluid spray, etc., from getting in your eyes.

⚠ NOTICE

■ If the fluid level is low or high

It is normal for the brake fluid level to go down slightly as the brake pads wear or when the fluid level in the accumulator is high.

⚠ NOTICE

If the reservoir needs frequent refilling, it may indicate a serious problem.

Maintenance

Items which require maintenance and the necessary parts and tools to perform maintenance on those items are as follows:

12-volt battery condition

- Warm water
- Baking soda
- Grease
- Conventional wrench (for terminal clamp bolts)
- Distilled water

Heater coolant level

- "Toyota Super Long Life Coolant" or a similar high quality ethylene glycol-based non-silicate, non-amine, non-nitrite and non-borate coolant with long-life hybrid organic acid technology "Toyota Super Long Life Coolant" is premixed with 50% coolant and 50% deionized water.
- Funnel (used only for adding coolant)

Power control unit coolant level

- In order to ensure maximum performance of the traction battery cooling system and limit risks of battery short-circuit and other damage to your vehicle, Lexus recommends using "Toyota Genuine Traction Battery Coolant" or similar high-quality ethylene glycol-based, low electric conductivity coolant, non-amine and non-borate coolant with azole additives.
- Funnel (used only for adding coolant)

Fuses

Fuse with same amperage rating as original

Radiator and condenser

-

Tire inflation pressure

- Tire pressure gauge
- Compressed air source

Washer fluid

- Water or washer fluid containing antifreeze (for winter use)
- Funnel (used only for adding water or washer fluid)

Opening the hood

1 **Pull the hood lock release lever.**

The hood will pop up slightly.

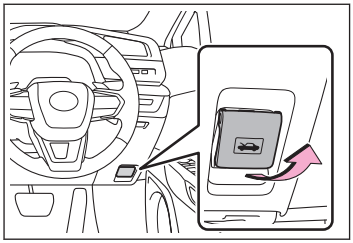

2 **Pull up the auxiliary catch lever to the left and lift the hood.**

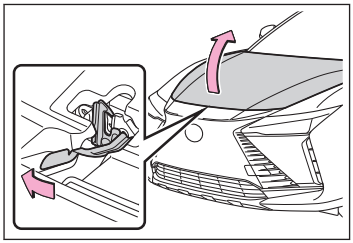

3 **Hold the hood open by inserting the supporting rod into the slot.**

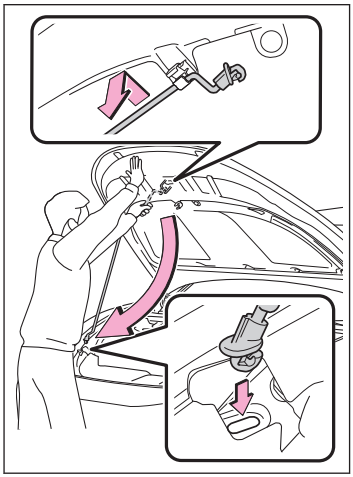

⚠ WARNING

■ Pre-driving check

Check that the hood is fully closed and locked.

If the hood is not locked properly, the hood may suddenly open while driving.

⚠ WARNING

■ After installing the support rod into the slot

Make sure the rod is properly inserted into the slot to prevent the hood from shutting on your head or body.

■ When closing the hood

When closing the hood, take extra care to prevent your fingers etc., from being caught.

⚠ NOTICE

■ When closing the hood

Be sure to return the support rod to its clip before closing the hood. Closing the hood without returning the support rod properly may cause the hood to be damaged.

Motor compartment

Motor compartment components

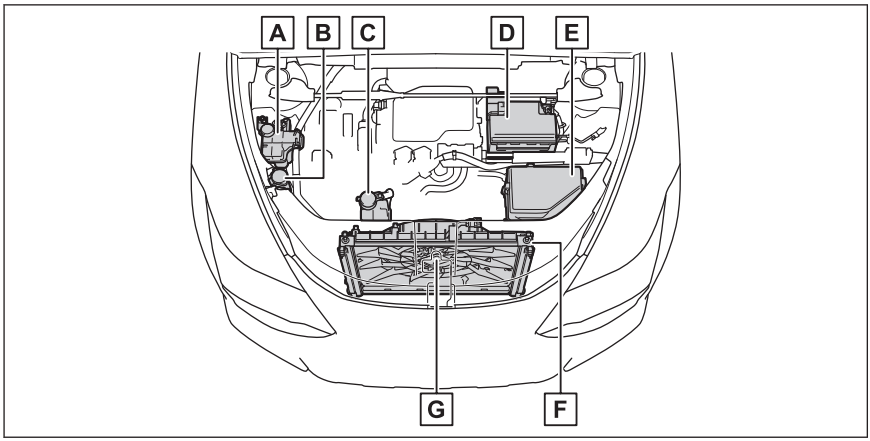

A Heater coolant reservoir (→P.519)
B Washer fluid tank (→P.526)
C Power control unit coolant reservoir (→P.521)
D 12-volt battery (→P.522)
E Fuse box (→P.663)
F Radiator (→P.520)
G Electric cooling fan

Checking the heater coolant

The coolant level is satisfactory if it is between the [MAX] and [MIN] lines on the reservoir when the EV system is cold.

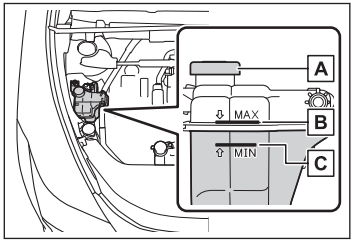

A Reservoir cap
B [MAX] line
C [MIN] line

If the level is on or below the [MIN] line, add coolant up to the [MAX] line. (→P.659)

INFORMATION

Coolant selection

Only use "Toyota Super Long Life Coolant" or a similar high quality ethylene glycol based non-silicate, non-amine, non-nitrite, and non-borate coolant with long-life hybrid organic acid technology.

"Toyota Super Long Life Coolant" is a mixture of 50% coolant and 50% deionized water. (Minimum temperature: -35°C [-31°F])

For more details about coolant, contact your Lexus dealer.

If the coolant level drops within a short time of replenishing

Visually check the hoses, heater coolant reservoir caps and water pump.

If you cannot find a leak, have your Lexus dealer, test the cap and check for leaks in the heater system.

WARNING

When the heater system is hot

Do not remove the heater coolant reservoir caps.

The heater system may be under pressure and may spray hot coolant if the cap is removed, causing serious injuries, such as burns.

NOTICE

When adding coolant

Coolant is neither plain water nor straight antifreeze. The correct mixture of water and antifreeze must be used to provide proper lubrication, corrosion protection and cooling. Be sure to read the antifreeze or coolant label.

If you spill coolant

Be sure to wash it off with water to prevent it from damaging parts or paint.

Checking the radiator

Check the radiator and clear away any foreign objects.

If either of the above parts is extremely dirty or you are not sure of their condition, have your vehicle inspected by your Lexus dealer.

⚠ WARNING

■ When the EV system is hot

Do not touch the radiator as they may be hot and cause serious injuries, such as burns.

■ When the electric cooling fan are operating

Do not touch the motor compartment.

With the power switch in ON, the electric cooling fan may automatically start to run if the air conditioning is on and/or the coolant temperature is high. Be sure the power switch is OFF when working near the electric cooling fan or radiator grille.

Checking the power control unit coolant

The coolant level is satisfactory if it is between the [MAX] and [MIN] lines on the reservoir when the EV system is cold.

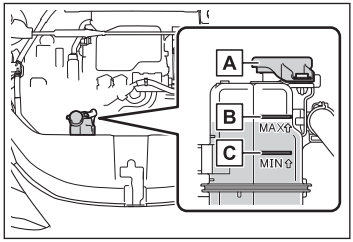

A Reservoir cap

B [MAX] line

C [MIN] line

If the level is on or below the [MIN] line, add coolant up to the [MAX] line.

INFORMATION

■ Coolant selection

In order to ensure maximum performance of the traction battery cooling system and limit risks of battery short-circuit and other damage to your vehicle, Lexus recommends using "Toyota Genuine Traction Battery Coolant" or similar high-quality ethylene glycol-based, low electric conductivity coolant, non-amine and non-borate coolant with azole additives.

Lexus cannot guarantee that the use of a product other than "Toyota Genuine Traction Battery Coolant" will prevent risks of battery short-circuit or other damage.

Never use water as it will cause damage.

Do not reuse coolant that has been removed from the radiator.

For more details about coolant, contact your Lexus dealer.

■ If the coolant level drops within a short time of replenishing

Visually check the radiator, hoses, power control unit coolant reservoir caps and water pump.

If you cannot find a leak, have your Lexus dealer, test the cap and check for leaks in the cooling system.

⚠ WARNING

■ When the EV system is hot

Do not remove the power control unit coolant reservoir caps.

The cooling system may be under pressure and may spray hot coolant if the cap is removed, causing serious injuries, such as burns.

⚠ NOTICE

■ When adding coolant

Coolant is neither plain water nor straight antifreeze. The correct mixture of water and antifreeze must be used to provide proper lubrication, corrosion protection and cooling. Be sure to read the antifreeze or coolant label.

■ If you spill coolant

Be sure to wash it off with water to prevent it from damaging parts or paint.

Checking the 12-volt battery

Check the 12-volt battery as follows.

■ 12-volt battery exterior

Make sure that the 12-volt battery terminals are not corroded and that there are no loose connections, cracks, or loose clamps.

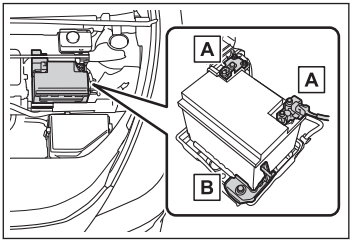

A Terminals

B Hold-down clamp

■ Checking 12-volt battery fluid

Check that the level is between the [UPPER LEVEL] and [LOWER LEVEL] lines.

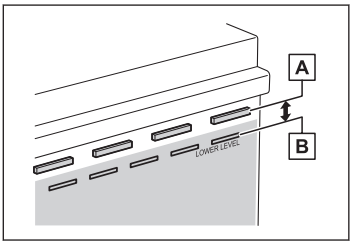

A [UPPER LEVEL] line

B [LOWER LEVEL] line

If the fluid level is at or below the [LOWER LEVEL] line, add distilled water.

■ Adding distilled water

1 Remove the vent plug.

2 Add distilled water.

If the [UPPER LEVEL] cannot be seen, check the fluid level by looking directly at the cell.

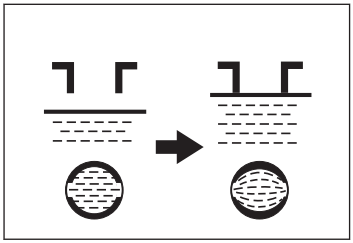

3 Put the vent plug back on and close it securely.

INFORMATION

■ Before recharging

When recharging, the 12-volt battery produces hydrogen gas which is flammable and explosive. Therefore, observe the following precautions before recharging:

- If recharging with the 12-volt battery installed on the vehicle, be sure to disconnect the ground cable.
- Make sure the power switch on the charger is off when connecting and disconnecting the charger cables to the 12-volt battery.

■ After recharging/reconnecting the 12-volt battery

- The EV system may not start. Follow the procedure below to initialize the system.

1. Shift the shift position to P.
2. Open and close any of the doors.
3. Restart the EV system.

- Unlocking the doors using the smart entry & start system may not be possible immediately after reconnecting the 12-volt battery. If this happens, use the wireless remote control or the mechanical key to lock/unlock the doors.
- Start the EV system with the power switch in ACC*1. The EV system may not start with the power switch turned off. However, the EV system will operate normally from the second attempt.
- The power switch mode is recorded by the vehicle. If the 12-volt battery is disconnected and reconnected, the vehicle will return the power switch mode to the status it was in before the 12-volt battery was disconnected. Make sure to turn off the power switch before disconnecting the 12-volt battery. Take extra care when connecting the 12-volt

*1: : ACC mode can be enabled/disabled on the customize menu (vehicles with multimedia system). (→P.676)

battery if the power switch mode prior to the 12-volt battery being disconnected is unknown.

If the EV system will not start even after multiple attempts at all the methods above, contact your Lexus dealer.

⚠ WARNING

■ Chemicals in the 12-volt battery

Batteries contain poisonous and corrosive sulfuric acid and may produce hydrogen gas which is flammable and explosive. To reduce the risk of death or serious injury, take the following precautions while working on or near the 12-volt battery:

- Do not cause sparks by touching the 12-volt battery terminals with tools.
- Do not smoke or light a match near the 12-volt battery.
- Avoid contact with eyes, skin and clothes.
- Never inhale or swallow electrolyte.
- Wear protective safety glasses when working near the 12-volt battery.
- Keep children away from the 12-volt battery.

■ Where to safely charge the 12-volt battery

Always charge the 12-volt battery in an open area. Do not charge the 12-volt battery in a garage or closed room where there is insufficient ventilation.

■ Emergency measures regarding electrolyte

- If electrolyte gets in your eyes

  Flush your eyes with clean water for at least 15 minutes and get immediate medical attention. If possible, continue to apply water with a sponge or cloth while traveling to the nearest medical facility.

- If electrolyte gets on your skin

  Wash the affected area thoroughly. If you feel pain or burning, get medical attention immediately.

- If electrolyte gets on your clothes

  It can soak through clothing on to your skin. Immediately take off the clothing and follow the procedure above if necessary.

- If you accidentally swallow electrolyte

  Drink a large quantity of water or milk. Get emergency medical attention immediately.

■ When there is insufficient 12-volt battery fluid

Do not use if there is insufficient fluid in the 12-volt battery. There is a possible danger that the 12-volt battery may explode.

⚠ NOTICE

When recharging the 12-volt battery

Never recharge the 12-volt battery while the EV system is operating. Also, be sure all accessories are turned off.

When adding distilled water

Avoid overfilling. Water spilled during 12-volt battery recharging may cause corrosion.

Adding washer fluid

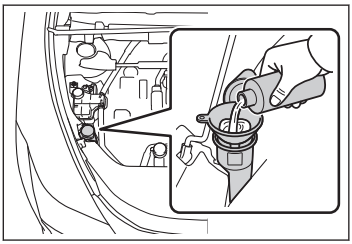

If washer fluid does not spray from any of the washers or **"Windshield Washer Fluid Low"** is displayed on the multi-information display, the washer fluid bottle may be empty. Add washer fluid.

⚠ WARNING

Do not add washer fluid when the EV system is hot or operating.

As washer fluid contains alcohol, it may catch fire if spilled on the motor, etc.

⚠ NOTICE

■ Do not use any fluid other than washer fluid

Do not use soapy water or engine antifreeze instead of washer fluid. Doing so may cause streaking on the vehicle's painted surfaces, as well as damaging the pump leading to problems of the washer fluid not spraying.

■ Diluting washer fluid

Dilute washer fluid with water as necessary. Refer to the freezing temperatures listed on the label of the washer fluid bottle.

Air conditioning filter maintenance

The air conditioning filter must be changed regularly to maintain air conditioning efficiency.

⚠ WARNING

Observe the following precautions. Failure to do so may result in the air conditioning system operating during the procedure, possibly resulting in injury.

Check that the charging connector is not connected

⚠ NOTICE

When using the air conditioning system

- Make sure that a filter is always installed. Using the air conditioning system without a filter may cause damage to the system.
- The filter is replaceable. When cleaning the filter, do not clean with water or an air gun.

To prevent damage to the filter cover



When moving the filter cover in the direction of arrow to release the fitting, pay attention not to apply excessive force to the claws. Otherwise, the claws may be damaged.

INFORMATION

When installing the filter cover

Slide the recessed part A of the filter cover on the upper surface of the upper filter case B as shown in the figure, and attach it so that it is lifted toward the insertion part of the cover attachment.



Checking interval

Inspect and replace the air conditioning filter according to the maintenance schedule. In dusty areas or areas with heavy traffic flow, early replacement may be required.

- If air flow from the vents decreases dramatically, the air conditioning filter may be clogged. Check the filter and replace it if necessary.

  (For scheduled maintenance information, please refer to the "Warranty and Service Booklet".)

- If air fresheners, etc. are used inside the vehicle, the service life of the deodorizing function of the air conditioning filter with deodorizing function may be reduced significantly. If odors from the air conditioning system become a concern, replace the filter.

If air flow from the vents decreases dramatically

The filter may be clogged. Check the filter and replace if necessary.

Replacing the air conditioning filter

1 **Turn the power switch off.**

Confirm that the charging connector is not connected. Also, do not use the Remote Air Conditioning System* during the procedure.

2 **Open the front passenger's door.**

Vehicles with Remote Air Conditioning System: By keeping the door open, unexpected operation of the Remote Air Conditioning System can be prevent.

3 **Disengage the clips of the passenger door side.**

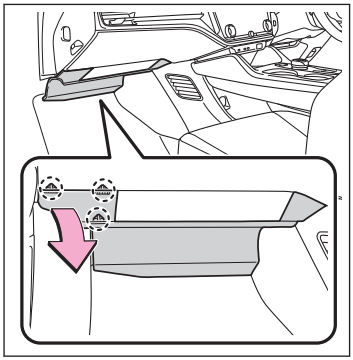

*: If equipped

4 While pressing the claw, hold handle A and remove the panel.

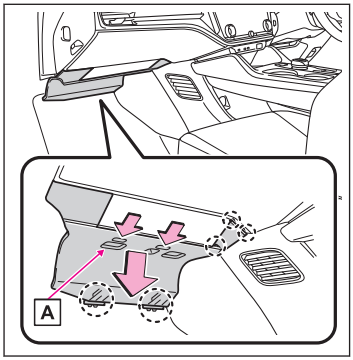

5 Unplug the connector.

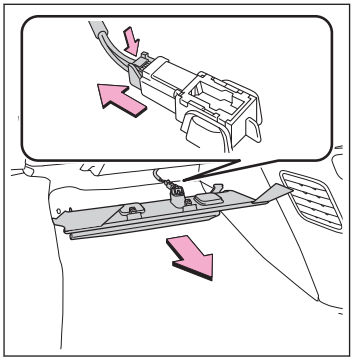

6 Remove the panel.

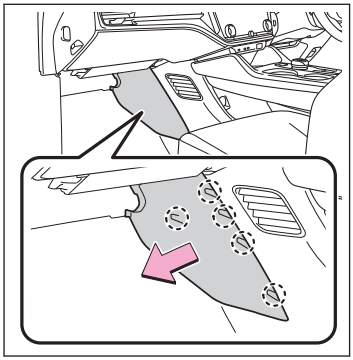

7 Unlock the filter cover (A), pull the filter cover out of the claws (B), and remove the filter cover.

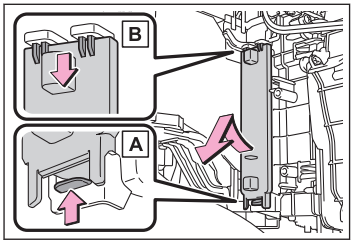

8 Hold the filter case A and remove the lower filter case.

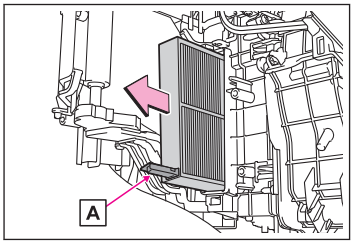

9 Hold the filter case A and pull down the upper filter case.

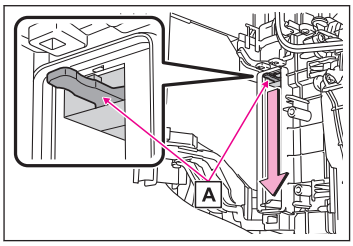

10 Hold the filter case A and remove the upper filter case.

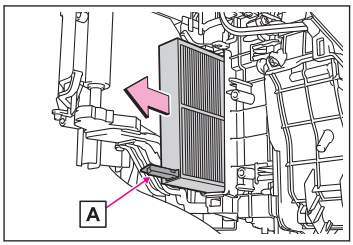

11 Remove the air conditioning filter from the upper and lower filter case and replace it with a new one.

Install so that the arrow points to the rear of the vehicle.

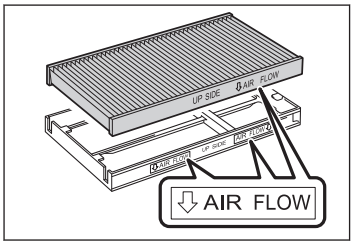

12 When installing, reverse the steps listed.

Tire maintenance

Replace or rotate tires in accordance with maintenance schedules and treadwear.

⚠ NOTICE

Take particular care when driving on uneven rough roads with cracks and potholes.

These conditions may cause loss of tire inflation pressure, reducing the cushioning ability of the tires. Driving on rough roads may also cause damage to the tires themselves, as well as the vehicle's wheels and body.

Tire inspection items

⚠ WARNING

■ When inspecting or replacing the tires

Observe the following precautions.

Failure to do so may lead to damage to the drivetrain or unstable handling.

- Do not mix tires of different makes, models or tread patterns. Also, do not mix tires of remarkably different treadwear.
- Do not use tire sizes other than those recommended by Lexus.
- Do not mix differently constructed tires (radial, bias-belted or bias-ply tires).
- Do not mix summer, all season and snow tires.
- Do not use tires that have been used on another vehicle.

  Do not use tires if you do not know how they were used previously.
- Do not tow anything if a tire that has been repaired using the emergency tire puncture repair kit is installed. The load on the tire may cause unexpected damage to the tire.

⚠ NOTICE

If tire inflation pressure becomes low while driving, do not continue driving. Otherwise the tire or wheel may be damaged.

Check if the treadwear indicators are showing on the tires. Also check the tires for uneven wear, such as excessive wear on one side of the tread.

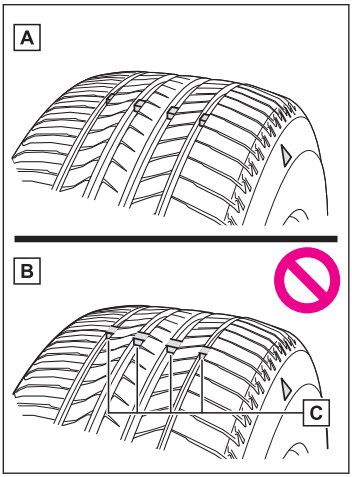

A New tread

B Worn tread

C Treadwear indicator

The location of treadwear indicators is shown by a [TWI] or △ mark, etc., molded into the sidewall of each tire.

Replace the tires if the treadwear indicators are showing on a tire.

INFORMATION

When to replace your vehicle's tires

Tires should be replaced if:

- The treadwear indicators are showing on a tire.
- You have tire damage such as cuts, splits, cracks deep enough to expose the fabric, and bulges indicating internal damage.
- A tire goes flat repeatedly or cannot be properly repaired due to the size or location of a cut or other damage.

  If you are not sure, consult with your Lexus dealer.

Tire life

Any tire over 6 years old must be checked by a qualified technician even if it has seldom or never been used or damage is not obvious.

If the tread on snow tires wears down below 4 mm (0.16 in.)

The effectiveness of the tires as snow tires is lost.

Operation of the tire pressure warning system

Your vehicle is equipped with a tire pressure warning system that uses tire pressure warning valves and transmitters to detect low tire inflation pressure before serious problems arise.

The tire pressure warning system of this vehicle adopts a 2-type warning system. (→P.571)

▶ **Multi-information display (vehicles without a head-up display)**

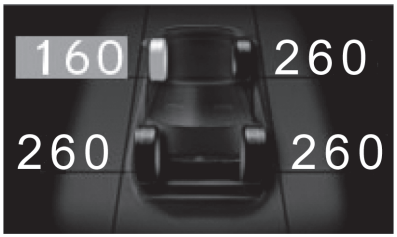

▶ **Multi-information display (vehicles with a head-up display)**

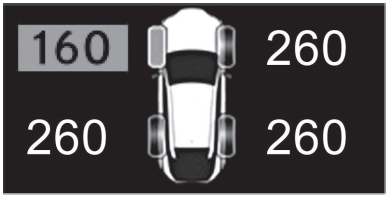

▶ **Center display**

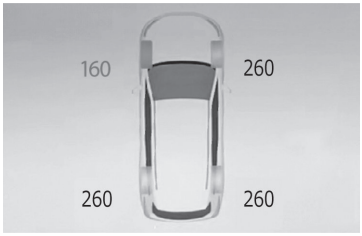

● When **"Adjust Pressure"** is displayed (Normal Warning)

A warning with the tire pressure warning light and warning buzzer when there is an unknown level of low tire pressure with the appearance of the tire due to natural air

leakage as well as the pressure lowering due to changes in the pressure according to the outside temperature.

- When **"Immediately Check tyre when Safe"** is displayed (Emergency Warning)

  A warning with the tire pressure warning light and warning buzzer when there is a known level of low tire pressure with the appearance of the tire due to pressure suddenly lowering.

  However, the system may not be able to detect sudden tire ruptures (bursting, etc.).

- The tire pressure detected by the tire pressure warning system can be displayed on the center display. (→P.321)

INFORMATION

■ Routine tire inflation pressure checks

The tire pressure warning system does not replace routine tire inflation pressure checks.

Make sure to check tire inflation pressure as part of your routine of daily vehicle checks.

■ Tire inflation pressure

- It may take a few minutes to display the tire inflation pressure after the power switch is turned to ON.

  It may also take a few minutes to display the tire inflation pressure after inflation pressure has been adjusted.

- Tire inflation pressure changes with temperature. The displayed values may also be different from the values measured using a tire pressure gauge.

■ Situations in which the tire pressure warning system may not operate properly

- In the following cases, the tire pressure warning system may not operate properly.
  - If non-genuine Lexus wheels are used.
  - A tire has been replaced with a tire that is not an OE (Original Equipment) tire.
  - A tire has been replaced with a tire that is not of the specified size.
  - Tire chains, etc. are equipped.
  - If a window tint that affects the radio wave signals is installed.
  - If there is a lot of snow or ice on the vehicle, particularly around the wheels or wheel housings
  - If the tire inflation pressure is extremely higher than the specified level.
  - If tires not equipped with tire pressure warning valves and transmitters are used.
  - If the ID code on the tire pressure warning valves and transmitters is not registered in the tire pressure warning computer.
- Performance may be affected in the following situations.

- Near a TV tower, electric power plant, gas station, radio station, large display, airport or other facility that generates strong radio waves or electrical noise.
- When carrying a portable radio, cellular phone, cordless phone or other wireless communication device.

If tire position information is not correctly displayed due to the radio wave conditions, the display may be corrected by changing the location of the vehicle as the radio wave conditions may change.

- When the vehicle is parked, the time taken for the warning to start or go off could be extended.
- When tire inflation pressure declines rapidly for example when a tire has burst, the warning may not operate.

Installing tire pressure warning valves and transmitters

⚠ NOTICE

■ Repairing or replacing tires, wheels, tire pressure warning valves, transmitters and tire valve caps

- When removing or fitting the wheels, tires or the tire pressure warning valves and transmitters, contact your Lexus dealer as the tire pressure warning valves and transmitters may be damaged if not handled correctly.
- Make sure to install the tire valve caps. If the tire valve caps are not installed, water could enter the tire pressure warning valves, corrode the valve, and cause sticking and air leaks.
- When replacing tire valve caps, do not use tire valve caps other than those specified. The cap may become stuck.

■ To avoid damage to the tire pressure warning valves and transmitters

When a tire is repaired with liquid sealants, the tire pressure warning valve and transmitter may not operate properly. If a liquid sealant is used, contact your Lexus dealer or other qualified service shop as soon as possible. Make sure to replace the tire pressure warning valve and transmitter when replacing the tire.

When replacing tires or wheels, tire pressure warning valves and transmitters must also be installed.

When new tire pressure warning valves and transmitters are installed, new ID codes must be registered in the tire pressure warning computer (→P.541)

INFORMATION

When replacing the tires and wheels

If the ID code of the tire pressure warning valve and transmitter is not registered, the tire pressure warning system will not work properly.

In this case, after driving for about 10 minutes, the tire pressure warning light blinks for 1 minute and stays on to indicate a system malfunction.

Registration of the position of each wheel

It is necessary to register the position of each wheel after performing a tire rotation.

Wheel position registration can be performed by oneself. Wheel position registration is performed by driving forward with moderate left and right turns. However, depending on the driving conditions and driving environment, registration may take some time to complete.

1 **Park the vehicle in a safe place, turn the power switch off and wait 15 minutes or more.**

2 **Start the EV system.**

The wheel position registration procedure cannot be performed while the vehicle is moving.

3 **Select on the center display.**

4 **Select [Vehicle customise].**

5 **Select [Tyre pressure].**

6 **Select [Tyre rotation].**

7 **Select [Continue].**

A message indicating that wheel position registration is being performed will be displayed on the multi-information display. **"---"** will be displayed for the tire inflation pressure of each tire and wheel position registration will begin.

8 **Drive straight (with occasional left and right turns) at approximately 40 km/h (25 mph) or more for approximately 10 to 30 minutes.**

When wheel position registration is complete, a message indicating that registration has been completed and the inflation pressure of each tire will be displayed on the multi-information display.

Even if it is not possible to drive continuously at approximately 40 km/h (25 mph) or more, registration can be completed by driving for a long time. However, if registration does not complete after driving for 1 hour or more, park the vehicle in a safe place and

leave it with the power switch in ON for approximately 15 minutes or more, and then perform the driving procedure again.

INFORMATION

When performing wheel position registration

- Normally, wheel position registration can be completed within approximately 30 minutes.
- Wheel position registration is performed while driving at a vehicle speed of approximately 40 km/h (25 mph) or more.

Wheel position registration procedure

- If the power switch is turned off while registering the wheel position, the next time the power switch is turned to ON, the wheel position registration will resume and it will not be necessary to restart the procedure.
- While the position of each wheel is being determined and the inflation pressures are not being displayed, if the inflation pressure of a tire drops, the tire pressure warning light will come on.

If the wheel position cannot be registered easily

- In the following situations, wheel position registration may take longer than usual to be completed or may not be possible.
  - Vehicle is not driven at approximately 40 km/h (25 mph) or more
  - Vehicle is driven on unpaved roads

  If wheel position registration does not complete after driving for 1 hour or more, park the vehicle in a safe place for approximately 15 minutes and then drive the vehicle again.
- If the vehicle is reversed during wheel position registration, all data collected until then will be cleared. Perform driving again.

Setting the tire pressure

In the following situations, it will be necessary to perform the tire inflation pressure setting procedure of the tire pressure warning system.

- When the specified tire inflation pressure has changed, such as due to carried load, etc.
- When the tire inflation pressure is changed such as when the tire size is changed.

If the tire inflation pressure has been adjusted to the specified level, perform the tire inflation setting procedure by selecting specified inflation pressure on the center display. (→P.546)

When the tire inflation pressure is to be other than specified, such as when tires other than the specified size are used, etc., set the tire inflation pressure using the current pressure. Make sure to adjust the tire inflation pressure of each tire to the appropriate level before performing tire pressure setting. The tire pressure warning system operates based on this tire inflation pressure.

Setting by selecting a specified tire inflation pressure

1 Start the EV system.

The tire inflation pressure cannot be set while the vehicle is moving.

2 Select ⚙ on the center display.

3 Select [Vehicle customise].

4 Select [Tyre pressure].

5 Select [Set indicated air pressure] and then select the desired front and rear tire pressures. (→P.546)

6 Select [OK].

The tire pressure warning light will slowly blink 3 times.

After setting the tire inflation pressure, a message indicating that setting has been completed will be displayed on the multi-information display.

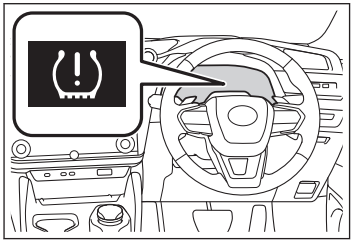

INFORMATION

If the tire inflation pressure cannot be set easily

- If the tire pressure warning light does not blink 3 times when starting the tire inflation pressure setting procedure, the procedure may not have started. Perform the procedure again from the beginning.
- If tire inflation pressure setting procedure cannot be completed after performing the above procedure, contact your Lexus dealer.

Setting using the current tire inflation pressure

⚠ WARNING

Make sure to adjust the tire inflation pressure of each tire to the appropriate level before performing tire pressure setting. Otherwise, the tire pressure warning light may not illuminate even if the tire inflation pressure drops or may illuminate even though the tire inflation pressure is normal.

1 **Adjust the tire inflation pressure of each tire to the appropriate level.**

Make sure to adjust the tire inflation pressure with the tires cold.

2 **Start the EV system.**

The tire inflation pressure cannot be set while the vehicle is moving.

3 **Select ⚙ on the center display.**

4 **Select [Vehicle customise].**

5 **Select [Tyre pressure].**

6 **Select [Set current air pressure].**

7 **Select [Continue].**

The tire pressure warning light will slowly blink 3 times and a message indicating that tire inflation pressure is being set will be displayed on the multi-information display.

After setting the tire inflation pressure, a message indicating that setting has been completed will be displayed on the multi-information display.

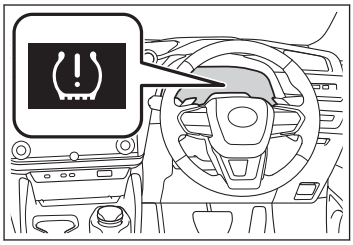

INFORMATION

■ Warning performance of the tire pressure warning system

- When performing the tire pressure setting using the current tire inflation pressure, the warning timing of the tire pressure warning system will vary according to the conditions under which tire pressure setting was performed. Therefore, a warning may be output even if the tire inflation pressure drops slightly or if the tire inflation pressure increases above that when the tire inflation pressure was set.
- Make sure to perform the tire pressure setting procedure after adjusting the tire inflation pressure. Also, make sure the tires are cold before performing the tire pressure setting procedure or adjusting the tire inflation pressure.

■ Tire inflation pressure setting procedure

- If the power switch is turned off while setting the tire inflation pressure, the next time the power switch is turned to ON, the setting procedure will resume and it will not be necessary to restart the procedure.
- If the tire inflation pressure setting procedure is started unnecessarily, adjust the tire inflation pressure to the specified level with the tires cold and then perform setting by selecting a specified tire inflation pressure, or perform the tire inflation pressure setting procedure with the current tire inflation pressure.

■ **If the tire inflation pressure cannot be set easily**

- Normally, the tire inflation pressure setting procedure can be completed in 2 or 3 minutes.
- If the tire pressure warning light does not blink 3 times when starting the tire inflation pressure setting procedure, the procedure may not have started. Perform the procedure again from the beginning.
- If tire inflation pressure setting procedure cannot be completed after performing the above procedure, contact your Lexus dealer.

Registering ID codes

The tire pressure warning valve and transmitter is equipped with a unique ID code. When new tire pressure warning valves and transmitters are installed, new ID codes must be registered in the tire pressure warning computer.

- ID codes can be registered by yourself, but depending on the driving conditions and driving environment, registration may take some time to complete.
- When using a wheel set which all of the ID codes have already been registered, the wheel set can be changed in a short amount of time. (→P.543)

Before performing ID code registration, make sure that no wheels with tire pressure warning valve and transmitters installed are near the vehicle.

1 **Park the vehicle in a safe place, turn the power switch off and wait 15 minutes or more.**

2 **Start the EV system.**

The ID code registration procedure cannot be performed while the vehicle is moving.

3 **Select ⚙ on the center display.**

4 **Select [Vehicle customise].**

5 **Select [Tyre pressure].**

6 **Check if the desired wheel set ([Set 1] or [Set 2]) is displayed.**

ID codes will be registered to the displayed wheel set.

To change the wheel set to be registered, select the displayed set, and then select the wheel set you wish to register.

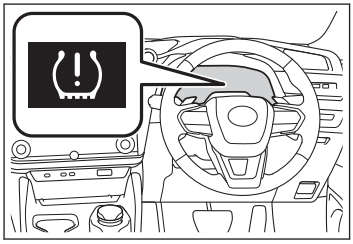

If ID codes have already been registered for that wheel set, the tire pressure warning light will slowly blink 3 times, and a message indicating that change is occurring will be displayed on the multi-information display.

7 Select [New tyre registration].

8 Select [Continue].

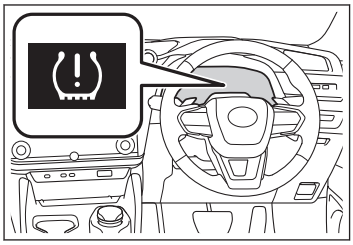

The tire pressure warning light will slowly blink 3 times and a message indicating that ID code registration is being performed will be displayed on the multi-information display. Wheel set changing will be canceled and registration will begin.

When registration is being performed, the tire pressure warning light will blink for approximately 1 minute then illuminate and **"---"** will be displayed for the inflation pressure of each tire on the multi-information display.

INFORMATION

If the tire pressure warning light does not blink 3 times when starting ID code registration procedure, the procedure may not have started. Perform the procedure again from the beginning.

9 Drive straight (with occasional left and right turns) at approximately 40 km/h (25 mph) or more for approximately 10 to 30 minutes.

When registration is complete, the tire pressure warning light will turn off and a message indicating that registration has been completed will be displayed on the multi-information display.

Registration may take longer than normal to complete if the vehicle speed cannot be maintained at approximately 40 km/h (25 mph) or more. If registration cannot be completed after driving for 1 hour or more, perform the registration procedure again from the beginning.

INFORMATION

■ **When registering ID codes**

- Normally, wheel position registration can be completed within approximately 30 minutes.
- ID code registration is performed while driving at a vehicle speed of approximately 40 km/h (25 mph) or more.

■ **If ID codes are not registered easily**

- In the following situations, ID code registration may take longer than usual to be completed or may not be possible.

- When the vehicle has not been parked for approximately 15 minutes or more before being driven
- Vehicle is not driven at approximately 40 km/h (25 mph) or more
- Vehicle is driven on unpaved roads
- Vehicle is driven near other vehicles and system cannot recognize tire pressure warning valve and transmitters of your vehicle over those of other vehicles
- Wheel with tire pressure warning valve and transmitter installed is inside or near the vehicle

● If the vehicle is reversed during registration, all data collected until then will be cleared. Perform driving again.

● If registration does not complete after driving for 1 hour or more, perform the ID code registration procedure again from the beginning.

● If the ID codes cannot be registered even when performing the above procedure, contact your Lexus dealer.

10 **If the tire inflation pressure of the wheel set installed differs from that of the previous set, it will be necessary to perform the tire inflation pressure setting procedure of the tire pressure warning system. (→P.538)**

If the specified tire inflation pressure is the same, it will not be necessary to perform the tire inflation pressure setting procedure.

Canceling ID code registration

To cancel ID code registration after it has been started, select [**New tyre registration**] again on the center display.

If ID code registration has been canceled, the tire pressure warning light will turn off.

If the warning light does not turn off, ID code registration may not have been cancelled correctly. To cancel registration, select [**New tyre registration**] again on the center display.

Selecting wheel set

Your vehicle is equipped with a tire pressure warning system with a function to register two sets of ID codes. This allows for registration of a second wheel set, for example a winter set.

● The wheel set can be changed only if a second wheel set has been registered to the system. If a second wheel set has not been registered, [**Set 2(Unregistered)**] will be displayed and it will not be possible to change to the selected wheel set.

ID codes can be registered by yourself. (→P.541)

- Only a change between both registered wheel set is possible, mixing between these wheel sets is not supported.
- While registering ID codes, it may not be possible to change between wheel sets normally. Cancel registration before changing between wheel sets. (→P.543)

1 **Install the desired wheel set.**

2 **Select ⚙ on the center display.**

3 **Select [Vehicle customise].**

4 **Select [Tyre pressure].**

5 **Select the wheel set ([Set 1] or [Set 2]) displayed for the set selection setting.**

6 **Select the wheel set you wish to register, and then select [OK].**

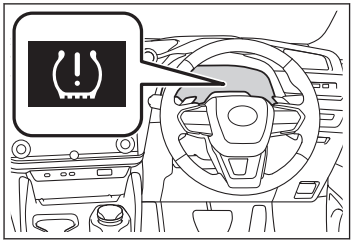

The tire pressure warning light will slowly blink 3 times, a message indicating that change is occurring will be displayed, and the wheel set change will begin.

Wheel set change will begin and the tire pressure warning light will blink for 1 minute and then illuminate. Also, while the change is being performed, "---" will be displayed for the tire inflation pressure of each tire on the multi-information display.

After approximately 2 minutes, the wheel set change will complete, the tire pressure warning light will turn off, and a completion message will be displayed on the multi-information display.

If changing does not complete after approximately 4 minutes, a message indicating that the change could not be completed will be displayed.

Check which wheel set is installed and perform the change procedure again from the beginning.

7 **If the specified tire inflation pressure of the wheel set installed differs from that of the previous set, it will be necessary to perform the tire inflation pressure setting procedure of the tire pressure warning system. (→P.538)**

If the specified tire inflation pressure is the same, it will not be necessary to perform the tire inflation pressure setting procedure.

8 **Register the position of each wheel. (→P.537)**

Checking tire inflation pressure

Make sure to maintain proper tire inflation pressure. Tire inflation pressure should be checked at least once per month. However, Lexus recommends that tire inflation pressure be checked once every two weeks.

⚠ WARNING

In order to ensure the performance of the tires, maintain proper tire inflation pressure.

If the tires are not properly inflated, the following may occur:

- Excessive wear
- Uneven wear
- Poor handling
- Possibility of blowouts resulting from overheated tires
- Air leaking from between tire and wheel
- Wheel deformation and/or tire damage
- Greater possibility of tire damage while driving (due to road hazards, expansion joints, sharp edges in the road, etc.)

⚠ NOTICE

After inspecting and adjusting tire inflation pressure, make sure to install the tire valve caps.

If a valve cap is not installed, dirt or moisture may get into the valve and cause an air leak, resulting in decreased tire inflation pressure.

Driving with incorrect tire inflation pressure may result in the following:

- Reduced electricity consumption efficiency
- Reduced driving comfort and poor handling
- Reduced tire life due to wear
- Reduced safety
- Damage to the drive train

If a tire needs frequent inflating, have it checked by your Lexus dealer.

INFORMATION

■ Instructions for checking tire inflation pressure

When checking tire inflation pressure, observe the following:

- Check only when the tires are cold.

  If your vehicle has been parked for at least 3 hours or has not been driven for more than 1.5 km or 1 mile, you will get an accurate cold tire inflation pressure reading.
- Always use a tire pressure gauge.

  It is difficult to judge if a tire is properly inflated based only on its appearance.
- It is normal for the tire inflation pressure to be higher after driving as heat is generated in the tire. Do not reduce tire inflation pressure after driving.
- Passengers and luggage weight should be placed so that the vehicle is balanced.

Checking the specified tire inflation pressure

The recommended cold tire inflation pressure and tire size are displayed on the tire and loading information label. (→P.668)

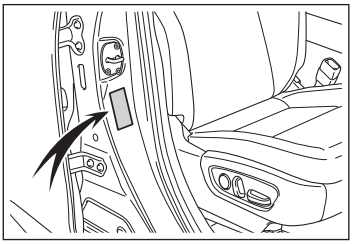

Lifting the vehicle with a floor jack

When using a floor jack, follow the instructions in the manual provided with the jack and perform the operation safely.When raising your vehicle with a floor jack, position the jack correctly.Improper placement may damage your vehicle or cause injury.

Front jack point position

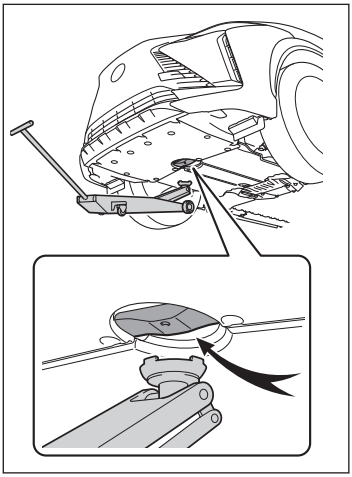

Rear jack point position

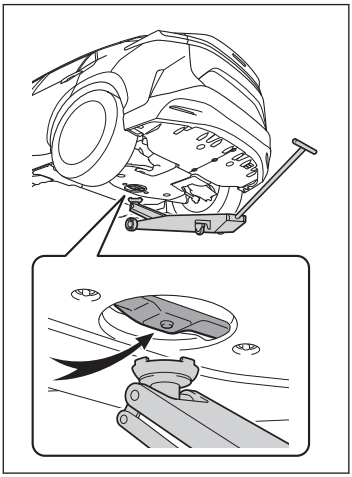

Rotating the tires

To equalize tire wear and help extend tire life, Lexus recommends that you rotate your tires approximately at the following intervals:

Rotate the tires every 5000 km (3000 miles)

Rotate the tires as shown in the illustration.

Make sure to perform wheel position registration procedure after rotating the tires. (→P.537)

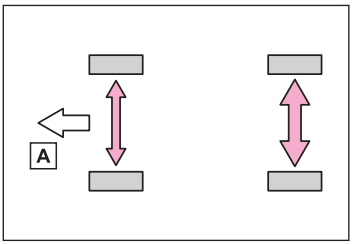

A Front

Wheels

If a wheel is bent, cracked or heavily corroded, it should be replaced. Otherwise, the tire may separate from the wheel, causing a loss of handling control.

Wheel selection

When replacing wheels, care should be taken to ensure that they are equivalent to those removed in load capacity, diameter, rim width and inset*1.

Replacement wheels are available at your Lexus dealer.

Lexus does not recommend using the following:

- Wheels of different sizes or types
- Used wheels
- Bent wheels that have been straightened

INFORMATION

When replacing wheels

The wheels of your vehicle are equipped with tire pressure warning valves and transmitters that allow the tire pressure warning system to provide advance warning in the event of a loss in tire inflation pressure.

Whenever wheels are replaced, tire pressure warning valves and transmitters must be installed. (→P.536)

⚠ WARNING

When replacing wheels

- Do not use wheels that are a different size from those recommended in the Owner's Manual, as this may result in a loss of handling control.
- Never use an inner tube in a leaking wheel which is designed for a tubeless tire. Doing so may result in an accident, causing death or serious injury.
- Use the correct wheel bolts for the wheels to be installed.

  For details, contact your Lexus dealer.

Wheel bolts

Observe the following precautions to reduce the risk of death or serious injury:

- Do not over tighten.

*1: Conventionally referred to as offset.

⚠ WARNING

- Never use oil or grease on the wheel bolts. Oil and grease may cause the wheel bolts to be excessively tightened, leading to bolt or disc wheel damage. In addition, the oil or grease can cause the wheel bolts to loosen and the wheel may fall off, causing a serious accident. Remove any oil or grease from the wheel bolts.
- If there are any cracks or deformations in the wheel bolts, or if the surface treatment becomes worn, have the wheel bolts replaced at your Lexus dealer. Failure to follow these precautions could cause the wheel bolts to loosen and the tire to fall off, resulting in death or serious injury.

■ Use of defective wheels prohibited

Do not use cracked or deformed wheels.

Doing so could cause the tire to leak air during driving, possibly causing an accident.

⚠ NOTICE

■ Replacing tire pressure warning valves and transmitters

- Because tire repair or replacement may affect the tire pressure warning valves and transmitters, make sure to have tires serviced by your Lexus dealer or other qualified service shop. In addition, make sure to purchase your tire pressure warning valves and transmitters at your Lexus dealer.
- Ensure that only genuine Lexus wheels are used on your vehicle.

  Tire pressure warning valves and transmitters may not work properly with non-genuine wheels.

Aluminum wheel precautions

Observe the following precautions when handling the aluminum wheels.

- Use only Lexus wheel bolts and wrenches designed for use with your aluminum wheels.
- When rotating, repairing or changing your tires, check that the wheel bolts are still tight after driving 1000 km (621 miles).
- Be careful not to damage the aluminum wheels when using tire chains.
- Use only Lexus genuine balance weights or equivalent and a plastic or rubber hammer when balancing your wheels.

Replacing the tire

When replacing the tires yourself, prepare the necessary tools and a jack. This vehicle uses wheel bolts. When using wheels that were installed when the vehicle was shipped from the factory, specialized Lexus genuine wheel bolts must be used. If necessary tire replacement seems difficult to perform, contact your Lexus dealer.

Preparation for lifting the vehicle with a jack

Before lifting the vehicle with a jack, perform the following.

1 **Stop the vehicle in a safe place on a hard, flat surface.**

2 **Set the parking brake.**

3 **Change the shift position to P.**

4 **Stop the EV system.**

INFORMATION

Jack and tools

As your vehicle is equipped with an emergency tire puncture repair kit, the following tools for replacing a tire are not included with your vehicle. They can be purchased at your Lexus dealer.

- Jack
- Jack handle
- Wheel bolt socket
- Guide pin
- Wheel bolt wrench

Storage position of the tools and jack

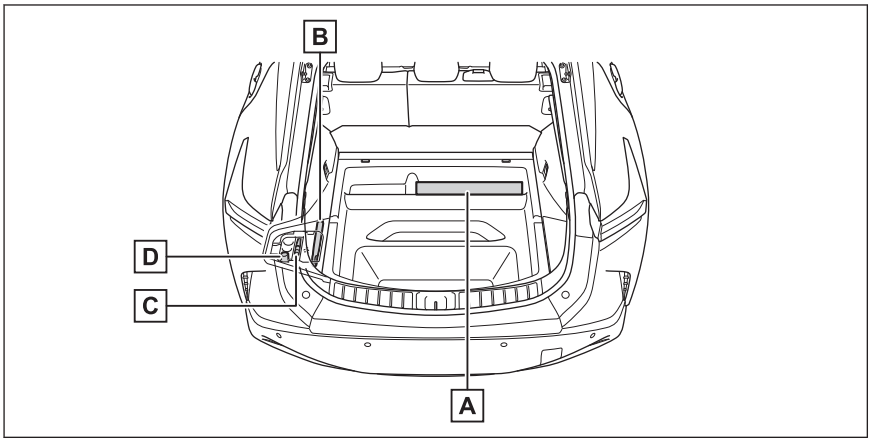

A Tool bag*

- Jack*
- Jack handle*
- Wheel bolt wrench*

B Towing eyelet

C Guide pin*

D Wheel bolt socket*

⚠ WARNING

Improper use of the tire jack may cause the vehicle to fall. Therefore, observe the following precautions.

- Do not use the tire jack for any purpose other than replacing tires or installing and removing tire chains.
- Only use the tire jack that comes with this vehicle for replacing a flat tire. Do not use it on other vehicles, and do not use other tire jacks for replacing tires on this vehicle.

*: If equipped

Taking out the jack

1 Remove the deck board.

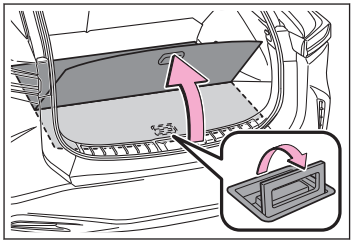

2 Take out the jack from the tool bag.

Removing a tire

⚠ WARNING

■ Precautions for replacing a tire

- Do not try to remove the wheel ornament by hand.

  Take due care in handling the ornament to avoid unexpected personal injury.

- Do not touch the disc wheels or the area around the brakes immediately after the vehicle has been driven.

  After the vehicle has been driven the disc wheels and the area around the brakes will be extremely hot. Touching these areas with hands, feet or other body parts while changing a tire, etc., may result in burns.

■ Setting the power back door when replacing the tires

When replacing a tire, make sure to disable the power back door. If not disabled, the power back door may operate unintentionally, and hands or fingers may be caught and injured. (→P.679)

1 Chock the tires.

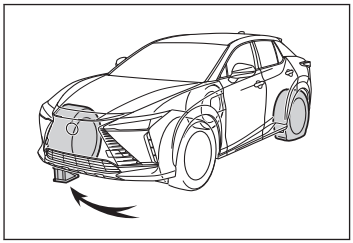

Wheel chock position

- Flat tire: Front left

  Place the wheel chock behind the rear right tire.

- Flat tire: Front right

  Place the wheel chock behind the rear left tire.

- Flat tire: Rear left

  Place the wheel chock in front of the front right tire.

- Flat tire: Rear right

Place the wheel chock in front of the front left tire.

2 **Using a wheel bolt wrench, slightly loosen the wheel bolts (approximately one turn).**

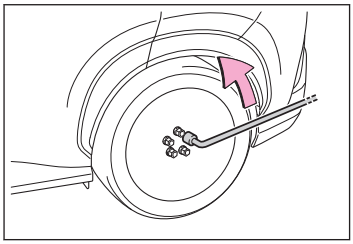

3 **Turn the tire jack portion A by hand and place the top of the jack in the position shown in the illustration.**

▶ **Front**

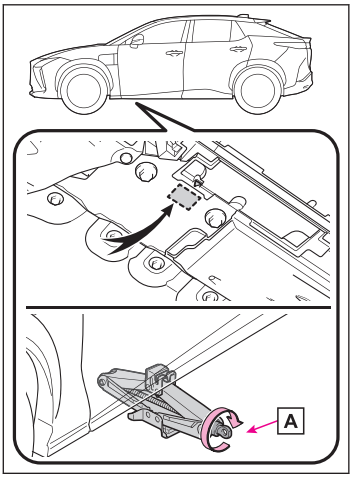

▶ **Rear**

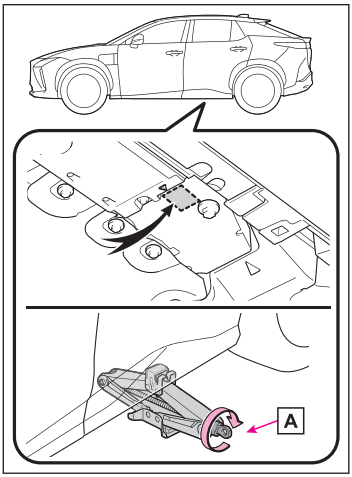

⚠ WARNING

Make sure the jack is positioned properly in the jack point.

4 **Install the wheel bolt socket to the jack handle.**

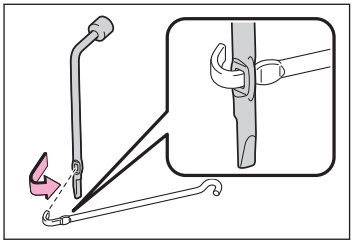

5 **Raise the vehicle until the tire is slightly raised off the ground.**

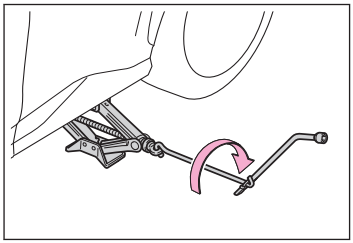

⚠ WARNING

Observe the following precautions when using the jack.

- Do not put any part of your body under the vehicle while it is supported by the jack.
- Do not start the EV system or drive the vehicle while the vehicle is supported by the jack.
- Do not raise the vehicle while someone is inside.
- When raising the vehicle, do not put an object on or under the jack.
- Do not raise the vehicle to a height greater than that required to replace the tire.
- Use a jack stand if it is necessary to get under the vehicle.

6 **Remove the uppermost wheel bolt and install the guide pin A by hand.**

Turn the guide pin clockwise to tighten it until it stops.

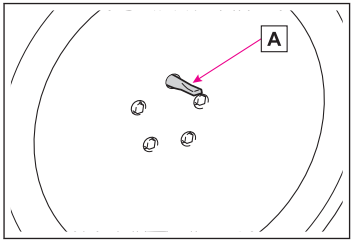

⚠ WARNING



When removing or installing a tire, make sure to use the guide pin.

Also, the guide pin is made of resin. It may be damaged if the wheel is placed anywhere other than A or if a large amount of force is applied to the guide pin.

7 **Remove the remaining wheel bolts and the tire.**

When resting the tire on the ground, place the tire so that the wheel design faces up, to avoid scratching the wheel surface.

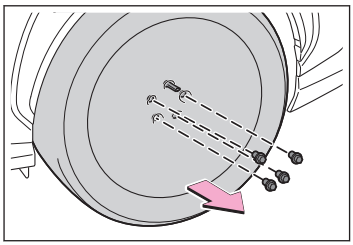

Installing the tire

1 **Remove any dirt or foreign matter from the wheel contact surfaces and wheel bolts.**

If foreign matter is not removed, the wheel bolts may loosen while the vehicle is in motion, and the wheel may come off.

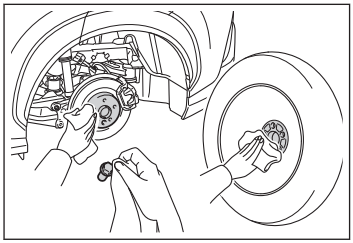

2 **Align a wheel bolt hole on the tire with the guide pin, and set the tire on the guide pin.**

Align the center hole of the wheel with the center of the hub and securely set the tire so that the wheel and hub contact surfaces are touching.

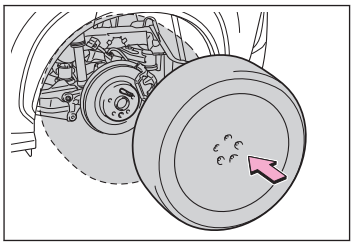

⚠ WARNING



When removing or installing a tire, make sure to use the guide pin.

Also, the guide pin is made of resin. It may be damaged if the wheel is placed anywhere other than A or if a large amount of force is applied to the guide pin.

3 **Loosely tighten each wheel bolt by hand or using a wheel bolt socket A.**

Do not use the wheel bolt socket for anything other than loosely tightening the wheel bolts by hand.

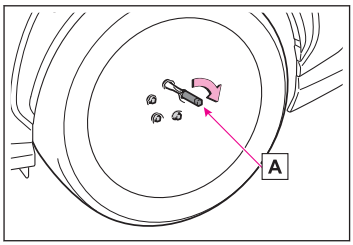

⚠ WARNING

Observe the following precautions. Failure to do so may lead to the wheel bolts loosening and the tire falling off.

- The contact surfaces of the wheel bolt and wheel are designed specifically to fit together. When using wheels that were installed when the vehicle was shipped from the factory, use specialized Lexus genuine wheel bolts. Do not use wheel bolts designed for other models, model years or types even if they are Lexus genuine parts. If the vehicle does not have wheels that were installed to the vehicle when it was shipped from the factory, the factory-installed wheel bolts may not be appropriate for the wheel. Contact either the retailer where the wheels were purchased or the manufacturer of the wheels for proper installation advice.
- Never apply oil or grease to the wheel bolts or their contact surface on the wheel A.

  Doing so may cause the wheel bolts to be tightened excessively, leading to damage to the wheel bolts, the threaded portion the wheel bolts install to B, or the wheel.

  Remove any oil or grease that has adhered when installing the wheel bolts.

⚠ WARNING



- If a wheel bolt hole in a wheel or the threads of a wheel bolt or the wheel hub are deformed, cracked, rusty or otherwise damaged, have the vehicle inspected by your Lexus dealer.
- Do not install the wheel ornament if it is damaged, as it may fly off the wheel while the vehicle is being driven.

4 **Remove the guide pin and loosely tighten the wheel bolt as in step 3.**

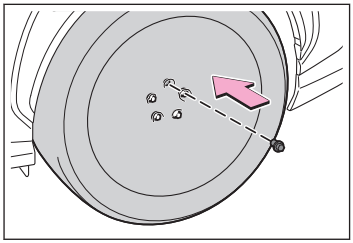

5 **Lower the vehicle.**

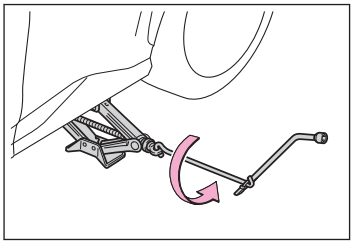

⚠ WARNING

When lowering the vehicle, make sure that no one is near the vehicle. If there are people nearby, warn them vocally before lowering the vehicle.

6 **Securely tighten the wheel bolts two or three times in the order shown in the illustration using a wheel bolt wrench.**

Tightening torque: 140 N•m (14.3 kgf•m, 103 ft•lbf)

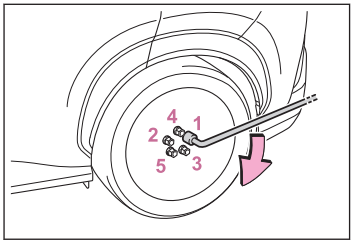

⚠ WARNING

When tightening the wheel bolts, do not tighten them excessively. Doing so may cause the wheel bolts, the threads of the wheel hub, or the wheel to be damaged.

7 **Stow the jack and all tools.**

⚠ WARNING

- After using the tools and jack, before driving, make sure that the tools and jack are securely stored. Failure to do so may result in injury during a collision or sudden braking.
- After replacing a tire, check the tightening torque as soon as possible.

  If you cannot confirm the tightening torque yourself, have the vehicle inspected at your Lexus dealer.

⚠ NOTICE

When removing or fitting the wheels, tires or the tire pressure warning valves and transmitters, contact your Lexus dealer as the tire pressure warning valves and transmitters may be damaged if not handled correctly.

9 When trouble arises

9-1. What to do if a problem occurs while driving

What to do if a problem occurs while driving 563

9-2. If a warning is indicated on the meter

If a warning light turns on/flashes 567

If a warning message is displayed 577

9-3. If the EV system will not start

When the EV system cannot be started even though the correct starting procedure is being followed 594

When the interior lights or headlights are dim and the EV system cannot be started 597

When the interior lights or headlights do not illuminate and the EV system cannot be started 603

When the horn sounds at a low volume and the EV system cannot be started 604

When the horn does not sound and the EV system cannot be started 605

9-4. If a tire is flat

Repairing a tire with the emergency tire puncture repair kit 606

9-5. If a door cannot be opened or locked

If a key has been lost 618

When the doors/windows cannot be operated using an electronic key 619

If a door cannot be opened using the door opener switch 628

If the rear doors cannot be opened from the inside 631

If the back door cannot be opened 632

9-6. If the EV system cannot be used normally

If the charging port lid cannot be opened 633

If AC charging cannot be performed normally 634

If DC charging cannot be performed normally 636

If the charging connector cannot be disconnected from the charging inlet 639

If the charging schedule function does not operate normally 640

9-7. If an indicator on an interior feature illuminates or flashes

When the wireless charger operation indicator light (on the charging tray) flashes 642

9-8. If the vehicle cannot move

When a EV system warning message is displayed and the vehicle does not move 644

If the transmission makes abnormal sounds 645

Towing with a tow truck 646

Using a flatbed truck 648

Towing with another vehicle 649

Getting unstuck from mud, sand, or snow 652

9-9. If you think something is wrong

If a vehicle abnormality is found 653

If abnormal sounds are emitted from the vehicle 654

If the vehicle behaves abnormally 655

9-10. Items to check before contacting a dealership

The steering wheel cannot be turned after the EV system is stopped 656

If the windows do not open or close by operating the power window switches 657

The power switch is turned off automatically 658

If your vehicle overheats 659

If electrical components cannot be used or do not operate when a switch is operated 662

If a light does not illuminate 663

What to do if a problem occurs while driving

Using the emergency flashers to warn other drivers

Use the emergency flashers to inform other drivers of the presence of your vehicle when it is stopped on the road, such as if the vehicle has broken down.

Press the switch.

All the turn signal lights will flash. To turn them off, press the switch once again.

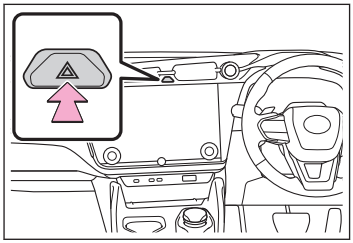

INFORMATION

Emergency flashers

- If the emergency flashers are used for a long time with the EV system stopped (while the "READY" indicator is not illuminated), the 12-volt battery may become discharged.
- If any of the SRS airbags deploy (inflate) or in the event of a strong rear impact, the emergency flashers will turn on automatically.

  The emergency flashers will turn off automatically after operating for approximately 20 minutes. To manually turn the emergency flashers off, press the switch twice. (The emergency flashers may not turn on automatically depending on the force of the impact and conditions of the collision.)

Stopping the vehicle in an emergency

Stop the vehicle using the following procedure only in an emergency, such as if it becomes impossible to stop the vehicle in the normal way:

⚠ WARNING

If the EV system has to be stopped while driving

Power assist for the steering wheel will be lost, making the steering wheel heavier to turn. Decelerate as much as possible before stopping the EV system.

1 **Steadily step on the brake pedal with both feet and firmly depress it.**

Do not pump the brake pedal repeatedly as this will increase the effort required to slow the vehicle.

2 **Change the shift position to N.**

- If the shift position is changed to N:

  After slowing down, stop the vehicle in a safe place by the road.

  Stop the EV system.

- If the shift position cannot be changed to N:

  Keep depressing the brake pedal with both feet to reduce vehicle speed as much as possible.

  To stop the EV system, press and hold the power switch for 2 consecutive seconds or more, or press it briefly 3 times or more in succession.

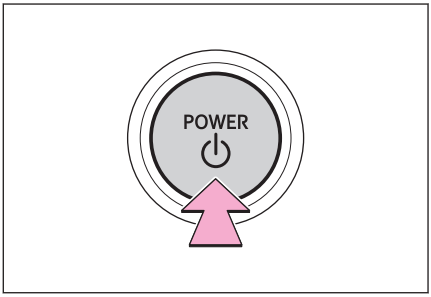

3 **Stop the vehicle in a safe place by the road.**

⚠ WARNING

To restart the EV system after performing an emergency shutdown, press the power switch.

If the vehicle is submerged or water on the road is rising

This vehicle is not designed to be able to drive on roads that are deeply flooded with water. Do not drive on roads where the roads may be submerged or the water may be rising. It is dangerous to remain in the vehicle, if it is anticipated that the vehicle will be flooded or set adrift.

Remain calm and follow the following.

- If the door can be opened, open the door and exit the vehicle.
- If the door cannot be opened, open the window using the power window switch and ensure an escape route.
- If the window can be opened, exit the vehicle through the window.
- If the door and window cannot be opened due to the rising water, remain calm, wait until the water level inside the vehicle rises to the point that the water pressure inside of the vehicle equals the water pressure outside of the vehicle

and then open the door after waiting for the rising water to enter the vehicle, and exit the vehicle.

When the outside water level exceeds half the height of the door, the door cannot be opened from the inside due to water pressure.

INFORMATION

■ Water level exceeds the floor

When the water level exceeds the floor and time has passed, the electrical equipment will get damaged, the power windows will not operate, the motor stop, and the vehicle may not be able to get moving.

■ Using an emergency escape hammer*1

Laminated glass* is used in the windshield and the windows on this vehicle. Laminated glass cannot be shattered with an emergency hammer*1.

■ How to distinguish laminated glass

When looking from the cross-sectional view point, laminated glass is two sheets of glass pasted together.



A Laminated glass
B Tempered glass

⚠ WARNING

■ Caution while driving

Do not drive on roads where the roads may be submerged or the water may be rising. Otherwise the vehicle may be damaged and cannot move, as well as become flooded and set adrift, which may lead to death.

Operation of emergency shut off system

When a certain level of impact is detected by the impact sensors, the emergency shut off system turns off the EV system and blocks the high voltage current. If the

*1: Contact your Lexus dealer or aftermarket accessory manufacturer for further information about an emergency hammer.

*: If equipped

emergency shut off system activates, your vehicle will not be able to be restarted. To restart the EV system, contact your Lexus dealer.

If a warning light turns on/flashes

Calmly perform the following actions if any of the warning lights comes on or flashes. If a light comes on or flashes, but then goes off, this does not necessarily indicate a malfunction in the system. However, if this continues to occur, have the vehicle inspected by your Lexus dealer.

INFORMATION

Warning buzzer

In some cases, the buzzer may not be heard due to being in a noisy location or audio sound.

Brake system warning light (warning buzzer)

Condition	Cause / Remedy
 (red)	Indicates that: ● The brake fluid level is low; or ● The brake system is malfunctioning ● **Immediately stop the vehicle in a safe place and contact your Lexus dealer. Continuing to drive the vehicle may be dangerous.**

⚠ WARNING

If both the ABS and the brake system warning lights remain on, stop your vehicle in a safe place immediately and contact your Lexus dealer.

The vehicle will become extremely unstable during braking, and the ABS system may fail, which could cause an accident resulting in death or serious injury.

Brake system warning light (warning buzzer)

Condition	Cause / Remedy
 (yellow)	Indicates a malfunction in: ● The regenerative braking system; ● The electronically controlled brake system; or ● The electric parking brake ● **Have the vehicle checked by your Lexus dealer immediately.**

⚠ WARNING

If both the ABS and the brake system warning lights remain on, stop your vehicle in a safe place immediately and contact your Lexus dealer.

The vehicle will become extremely unstable during braking, and the ABS system may fail, which could cause an accident resulting in death or serious injury.

Charging system warning light (warning buzzer)

Condition	Cause / Remedy
 This light illuminates on the multi-information display.	Indicates a malfunction in the vehicle's charging system ● **Immediately stop the vehicle in a safe place and contact your Lexus dealer.**

Traction battery charge warning light (warning buzzer)

Condition	Cause / Remedy
 (yellow)	Indicates that the remaining charge of the traction battery is low and charging is required When the outside temperature is low, this light may turn on earlier than usual to urge the driver to charge the traction battery early. ● **Charge the traction battery.** (→P.51,58)

SRS warning light

Condition	Cause / Remedy
	Indicates a malfunction in: ● The SRS airbag system; or ● The seat belt pretensioner system ● **Have the vehicle checked by your Lexus dealer immediately.**

ABS warning light (warning buzzer)

Condition	Cause / Remedy
	Indicates a malfunction in: ● The ABS; or ● The brake assist system ● **Have the vehicle checked by your Lexus dealer immediately.**

⚠ WARNING

If both the ABS and the brake system warning lights remain on, stop your vehicle in a safe place immediately and contact your Lexus dealer.

The vehicle will become extremely unstable during braking, and the ABS system may fail, which could cause an accident resulting in death or serious injury.

Inappropriate pedal operation warning light (warning buzzer)

Condition	Cause / Remedy
 This light illuminates on the multi-information display.	When a buzzer sounds: Indicates a malfunction in: ● The Brake Override System ● The Drive-Start Control ● **Have the vehicle checked by your Lexus dealer immediately.**
	When a buzzer sounds: Indicates that the shift position was changed and Drive-Start Control was operated while depressing the accelerator pedal. ● **Momentarily release the accelerator pedal.**
	When a buzzer sounds: PKSB (Parking Support Brake) has operated ● **Follow the instructions displayed on the multi-information display.**

Condition	Cause / Remedy
 This light illuminates on the multi-information display.	When a buzzer does not sound: Indicates that the accelerator and brake pedals are being depressed simultaneously, and the Brake Override System is operating. ● **Release the accelerator pedal and depress the brake pedal.**

Electric power steering system warning light (warning buzzer)

Condition	Cause / Remedy
 (red/yellow)	Indicates a malfunction in the EPS (Electric Power Steering) system ● **Have the vehicle checked by your Lexus dealer immediately.**

INFORMATION

Electric power steering system warning light (warning buzzer)

When the 12-volt battery charge becomes insufficient or the voltage temporarily drops, the electric power steering system warning light may come on and the warning buzzer may sound.

⚠ WARNING

When the electric power steering system warning light comes on yellow, the assist to the power steering is restricted. When the light comes on red, the assist to the power steering is lost and handling operations of the steering wheel become extremely heavy.

When steering wheel operations are heavier than usual, grip the steering wheel firmly and operate it using more force than usual.

Driver's and front passenger's seat belt reminder light (warning buzzer)

Condition	Cause / Remedy
	Warns the driver and/or front passenger to fasten their seat belts ● **Fasten the seat belt.** If the front passenger's seat is occupied, the front passenger's seat belt also needs to be fastened to make the warning light (warning buzzer) turn off.

INFORMATION

Driver's and front passenger's seat belt warning buzzer

The driver's and front passenger's seat belt warning buzzer sounds to alert the driver and front passenger that his or her seat belt is not fastened. If the seat belt is unfastened, the buzzer sounds intermittently for a certain period of time after the vehicle reaches a certain speed.

Front passenger detection sensor, seat belt reminder and warning buzzer

- If luggage is placed on the front passenger seat, the front passenger detection sensor may cause the warning light to flash and the warning buzzer to sound even if a passenger is not sitting in the seat.
- If a cushion is placed on the seat, the sensor may not detect a passenger, and the warning light may not operate properly.

Rear passengers' seat belt reminder light (warning buzzer)

Condition	Cause / Remedy
 (Vehicles without a head-up display)  (Vehicles with a head-up display)	Warns the rear passengers to fasten their seat belts ● **Fasten the seat belt.**

INFORMATION

Rear passengers' seat belt warning buzzer

The rear passengers' seat belt warning buzzer sounds to alert the rear passenger that his or her seat belt is not fastened. If the seat belt is unfastened, the buzzer sounds intermittently for a certain period of time after the vehicle reaches a certain speed.

Tire pressure warning light (warning buzzer)

Condition	Cause / Remedy
	When the light comes on after blinking for approximately 1 minute: Malfunction in the tire pressure warning system ● **Have the system checked by your Lexus dealer.**

Condition	Cause / Remedy
	When the light comes on: Low tire inflation pressure from natural causes ● **After the temperature of the tires has lowered sufficiently, check the inflation pressure of each tire and adjust them to the specified level.**
	When the light comes on: Low tire inflation pressure from flat tire ● **Immediately stop the vehicle in a safe place and perform the necessary actions (→P.572)**

INFORMATION

If the tire pressure warning light comes on

Inspect the tires to check if a tire is punctured.

- If a tire is punctured: →P.606
- If none of the tires are punctured: Turn the power switch off then turn it to ON. Check if the tire pressure warning light comes on or blinks.
  - If the tire pressure warning light blinks for approximately 1 minute then stays on

    There may be a malfunction in the tire pressure warning system. Have the vehicle inspected by your Lexus dealer immediately.
  - If the tire pressure warning light comes on

    After the temperature of the tires has lowered sufficiently, check the inflation pressure of each tire and adjust them to the specified level.

    If the warning light does not turn off even after several minutes have elapsed, check that the inflation pressure of each tire is at the specified level and perform the tire inflation pressure setting procedure. (→P.538)

    If the warning light does not turn off even after several minutes have elapsed since performing the tire inflation pressure setting procedure, have the vehicle inspected by your Lexus dealer immediately.

The tire pressure warning light may come on due to natural causes

The tire pressure warning light may come on due to natural causes such as natural air leaks and tire inflation pressure changes caused by temperature. In this case, adjusting the tire inflation pressure will turn off the warning light (after a few minutes).

⚠ WARNING

■ If the tire pressure warning light comes on

Be sure to observe the following precautions. Failure to do so could cause a loss of vehicle control and result in death or serious injury.

- Stop your vehicle in a safe place as soon as possible. Adjust the tire inflation pressure immediately.
- If the tire pressure warning light comes on even after tire inflation pressure adjustment, it is probable that you have a flat tire. Check the tires. If a tire is flat, repair the flat tire by using emergency tire puncture repair kit.
- Avoid abrupt maneuvering and braking. If the vehicle tires deteriorate, you could lose control of the steering wheel or the brakes.

■ If a blowout or sudden air leakage should occur

The tire pressure warning system may not activate immediately.

⚠ NOTICE

■ To ensure the tire pressure warning system operates properly

Do not install tires with different specifications or makers, as the tire pressure warning system may not operate properly.

PCS warning light (warning buzzer)

Condition	Cause / Remedy
	Indicates a malfunction in the PCS (Pre-Collision System). ● **Follow the instructions displayed on the display.** If the PCS (Pre-Collision System) or VSC (Vehicle Stability Control) system is disabled, the PCS warning light will illuminate.

LTA indicator (warning buzzer)

Condition	Cause / Remedy
 (yellow)	Indicates a malfunction in the LTA (Lane Tracing Assist). ● **Follow the instructions displayed on the display.**

LDA indicator (warning buzzer)

Condition	Cause / Remedy
 (yellow)	Indicates a malfunction in the LDA (Lane Departure Alert). ● **Follow the instructions displayed on the display.**

Dynamic radar cruise control indicator (warning buzzer)

Condition	Cause / Remedy
 (yellow)	Indicates a malfunction in the dynamic radar cruise control. ● **Follow the instructions displayed on the display.**

Cruise control indicator (warning buzzer)

Condition	Cause / Remedy
 (yellow)	Indicates a malfunction in the cruise control. ● **Follow the instructions displayed on the display.**

Driving assist information indicator

Condition	Cause / Remedy
	The following systems may be malfunctioning. ● PCS (Pre-Collision System) ● LDA (Lane Departure Alert) ● **Follow the instructions displayed on the multi-information display.**
	Indicates one of the following systems is malfunctioning or disabled. ● PKSB (Parking Support Brake) ● RCD (Rear Camera Detection) ● BSM (Blind Spot Monitor) ● RCTA(Rear Cross Traffic Alert) ● Safe Exit Assist (with door opening control) ● **Follow the instructions displayed on the multi-information display.**

Lexus parking assist-sensor OFF indicator (warning buzzer)

Condition	Cause / Remedy
	Indicates a malfunction in the Lexus parking assist-sensor function ● **Have the vehicle checked by your Lexus dealer immediately.**
	Indicates that the system is temporarily unavailable, possibly due to a sensor being dirty or covered with ice, etc. ● **Follow the instructions displayed on the multi-information display.**

Slip indicator

Condition	Cause / Remedy
 (illuminates)	Indicates a malfunction in: ● The VSC system; ● The TRC system; ● The Trailer Sway Control; or ● The hill-start assist control system ● **Have the vehicle checked by your Lexus dealer immediately.**

Parking brake indicator

Condition	Cause / Remedy
 (flashes)	It is possible that the parking brake is not fully engaged or released ● **Operate the parking brake switch once again.** This light comes on when the parking brake is not released. If the light turns off after the parking brake is fully released, the system is operating normally.
	Indicates a malfunction in the parking brake system ● **Have the vehicle checked by your Lexus dealer immediately.**

Brake hold operated indicator (warning buzzer)

Condition	Cause / Remedy
HOLD (flashes)	Indicates a malfunction in the brake hold system ● **Have the vehicle checked by your Lexus dealer immediately.**

If a warning message is displayed

The multi-information display shows warnings for system malfunctions and incorrectly performed operations, and messages that indicate a need for maintenance. When a message is displayed, perform the appropriate corrective action for the message. If a warning message is displayed again after the appropriate actions have been performed, contact your Lexus dealer. Additionally, if a warning light comes on or flashes at the same time that a warning message is displayed, take the appropriate corrective action for the warning light.

INFORMATION

Warning messages

The warning messages explained below may differ from the actual messages according to operation conditions and vehicle specifications.

Warning buzzer

In some cases, the buzzer may not be heard due to being in a noisy location or audio sound.

A message that indicates the need for visiting your Lexus dealer

Cause	Remedy
The system or part shown on the multi-information display is malfunctioning.	Have the vehicle inspected by your Lexus dealer immediately.

If a message that indicates the need for the rotary shifter operation is displayed

Cause	Remedy
To prevent the rotary shifter from being operated incorrectly or the vehicle from moving unexpectedly, a message that requires shifting the shift position may be displayed on the multi-information display.	Follow the instruction of the message and shift the shift position.

"EV System Stopped Steering Power Low"

Cause	Remedy
This message is displayed if the EV system is stopped while driving.	When steering wheel operations are heavier than usual, grip the steering wheel firmly and operate it using more force than usual.

"Auto Power OFF to Conserve Battery"

Cause	Remedy
Power was turned off due to the automatic power off function. (→P.171)	Next time when starting the EV system, operate the EV system for approximately 5 minutes to recharge the 12-volt battery.

"Shift is in N Release Accelerator Before Shifting"

Cause	Remedy
The accelerator pedal has been depressed when the shift position is in N.	Release the accelerator pedal and change the shift position to D or R.

"Press brake when vehicle is stopped EV system may overheat"

Cause	Remedy
The message may be displayed when the accelerator pedal is depressed to hold the vehicle while the vehicle is stopped on an incline, etc.	The EV system may overheat. Release the accelerator pedal and depress the brake pedal.

"12-Volt Battery Charging System Malfunction Stop in a Safe Place See Owner's Manual"

Cause	Remedy
It may indicate a malfunction.	Immediately stop the vehicle and contact your Lexus dealer. Continuing to drive the vehicle may be dangerous.

"EV system overheated Output power reduced"

Cause	Remedy
This message may be displayed when driving under severe operating conditions. (For example, when driving up a long steep hill.)	Handling method: →P.659

"Tyre Set Switching Incomplete Retry Tyre Set Registration See Owner's Manual"

Cause	Remedy
The wheel set change could not be completed.	Check which wheel set is installed and perform the change procedure again from the beginning. (→P.543)

"Maintenance Required For Traction Battery At Your Dealer"

Cause	Remedy
The traction battery is scheduled to be inspected or replaced.	Have the vehicle inspected by your Lexus dealer immediately. ● Continuing to drive the vehicle without having the traction battery inspected will cause the EV system not to start. ● If the EV system does not start, contact your Lexus dealer immediately.

"Headlight System Malfunction Visit Your Dealer"

Cause	Remedy
The system may be malfunctioning.	Have the vehicle checked by your Lexus dealer.

"AWD System Overheated Switching to 2WD Mode"

Cause	Remedy
AWD system is overheated.	Stop the vehicle in a safe place with the EV system operating.(1) If the message disappears after a while, there is no problem. If the message remains, have the vehicle inspected by your Lexus dealer immediately.

(1) When stopping the vehicle, do not stop the EV system until the display message has turned off.

"AWD System Overheated 2WD Mode Engaged"

Cause	Remedy
AWD system has been temporarily released and switched to front-wheel drive due to overheating.	Stop the vehicle in a safe place with the EV system operating.(1) If the message disappears after a while, AWD system will automatically recover. If the message remains, have the vehicle inspected by your Lexus dealer immediately.

(1) When stopping the vehicle, do not stop the EV system until the display message has turned off.

"AWD System Malfunction 2WD Mode Engaged Visit Your Dealer"

Cause	Remedy
A malfunction occurs in the AWD system.	Have the vehicle inspected by your Lexus dealer immediately.

"Smart Entry & Start System Malfunction See Owner's Manual"

Cause	Remedy
It may indicate a malfunction.	Have the vehicle checked by your Lexus dealer immediately.

"Braking Power Low Stop in a Safe Place See Manual"

Cause	Remedy
It may indicate a malfunction.	Immediately stop the vehicle in a safe place and contact your Lexus dealer. Continuing to drive the vehicle may be dangerous.

"A New Key has been Registered Contact Your Dealer for Details"

Cause	Remedy
This message will be displayed each time the driver's door is opened when the doors are unlocked from the outside for approximately 10 days after a new electronic key has been registered.	If this message is displayed but you have not had a new electronic key registered, ask your Lexus dealer to check if an unknown electronic key (other than those in your possession) has been registered.

"Parking Brake Temporarily Unavailable"

Cause	Remedy
If the parking brake is operated repeatedly over a short period of time, the system may restrict operation to prevent overheating.	If this happens, refrain from operating the parking brake. Normal operation will return after about 1 minute.

"EPB Activation Stopped Incompletely"

Cause	Remedy
Operate the parking brake switch. If the message does not disappear after operating the switch several times, the system may be malfunctioning.	Have the vehicle checked by your Lexus dealer.

"Parking Brake Unavailable"

Cause	Remedy
Operate the parking brake switch. If the message does not disappear after operating the switch several times, the system may be malfunctioning.	Have the vehicle checked by your Lexus dealer.

"Brake Hold Malfunction Press Brake to Deactivate Visit Your Dealer"

Cause	Remedy
The system may be malfunctioning.	Have the vehicle checked by your Lexus dealer immediately.

"Charging Stopped Due to Pulled Charging Connector"

Cause	Remedy
● AC charging connector is removed while AC charging ● After the traction battery is fully charged, the AC charging connector is removed while the traction battery is being recharged again because electricity-consuming functions(1) have been used and the remaining charge is now reduced.	If the AC charging connector is disconnected during AC charging, charging will be suspended. To continue charging, reconnect the AC charging connector.
AC charging connector is not securely connected	Check the connection status of the AC charging connector. ● When connecting the AC charging connector, insert the AC charging connector securely. ● After connecting the AC charging connector, check that the charging indicator of the charging port is turned on. If charging cannot be carried out, even though the proper procedures were followed, have the vehicle inspected by your Lexus dealer.
AC charging connector was unlocked while charging	When the AC charging connector is unlocked while charging, charging stops. To continue charging, reconnect the AC charging connector.

(1) Electricity is consumed when operating traction battery heater. Using My Room Mode also consumes power.

"Charging Complete Limited Charge Due to Battery Temp"

Cause	Remedy
Charging was stopped to protect the traction battery as it continued to remain hot for a certain period of time.	Allow the traction battery to cool down and perform charging again if the charging amount has not reached the desired amount.

"Charging Stopped Check Charging Source"

Cause	Remedy
Problem in power supply from external power source	Check the following items. ● Plug is not disconnected ● Plug is securely inserted ● Remote switch is not off ● The circuit breaker has tripped ● Extension cord is not used and electrical socket is not overloaded ● Connected to a dedicated power line ● Electrical leakage has occurred or not If there is no problem with any of the above items, there may be a problem with the electrical socket of the building. Contact an electrician and request an inspection. (Contact the facility manager of the charging station when there is a problem with charging station.) If charging cannot be carried out, even though there is no problem with the power source path, there may be a malfunction in the system. Have the vehicle inspected by your Lexus dealer.
AC charger has stopped charging	Charging may be canceled by an interruption of power supply depending on specifications of a charger. Refer to the instructions provided with the charger. ● When charging is stopped using the charger ● Equipment with charging schedule function ● Equipment that is not compatible with the charging schedule function of the vehicle Check if it is possible to charge with the AC charging cable or other AC charger. If charging cannot be carried out even when using the AC charging cable or other AC charger, contact your Lexus dealer.
AC charger is not compatible with vehicle	Check if it is possible to charge with the AC charging cable or other AC charger. If charging cannot be carried out even when using the AC charging cable or other AC charger, contact your Lexus dealer.
DC charger is not compatible with the vehicle.	If the message above is displayed when DC charging has not stopped operations, the DC charger may be damaged, so do not use that DC charger. Check if it is possible to charge with another DC charger. If the message is still displayed and charging cannot be performed even though

Cause	Remedy
The DC charger is malfunctioning.	another DC charger is used, drive the vehicle for several kilometers and then charge the traction battery with different DC charger.

"Charging Stopped High Energy Use See Owner's Manual"

Cause	Remedy
Power is being consumed by electrical components of vehicle	Check the following items, and then carry out charging again. ● If the headlights and audio are turned on, turn them off. ● Turn the power switch off. If charging cannot be carried out, even after performing the above, the 12-volt battery may not be sufficiently charged. Operate the traction battery system for approximately 15 minutes or more to charge the 12-volt battery.

"Charging System Malfunction See Owner's Manual"

Condition	Cause / Remedy
Malfunction occurred in charging system	Have the vehicle checked by your Lexus dealer.

"Check Charging System Close Charging Port Lid See Owner's Manual"

Condition	Cause / Remedy
Charging system check is not completed properly after DC charging.	If the system check after DC charging is not completed successfully, the EV system will not start even if the power switch is pressed while depressing the brake pedal. Perform a system check with the following procedures. (→P.584)

Performing a system check

1 Be sure to engage the parking brake and then turn the power switch off.

2 Close the DC charging inlet cap, and then close the charging port lid.

3 Turn the power switch to ON.

Check if **"Checking Charging System"** is displayed on the multi-information display

Do not open the charging port lid while the charging system is checking.

When the system check is completed, the power switch automatically turns off.

4 **Press the power switch while depressing the brake pedal.**

The **"READY"** indicator will turn on.

Contact your Lexus dealer if the charging system check is done and the message on the multi-information display does not go off.

"Charging Stopped Time Limit Reached"

Condition	Cause / Remedy
The DC charging is not completed within the restricted time with DC charger.	● Depending on the type of DC charger, the timer may be set to stop charging after a certain time. Check with the charging station manager. ● Depending on the condition of the vehicle, the charging time may become longer than normal, and the DC charging may not be completed within the restricted time. • When the A/C, headlights, audio system, etc., are turned on, the electricity consumption of the vehicle will be increased. Perform the DC charging after turning off all of the above. • The temperature of the traction battery may be low. Perform the DC charging after warming up the traction battery.

"Charging Stopped Check Charging Source or Vehicle"

Cause	Remedy
Malfunction occurred in connector locking system.	Have the vehicle checked by your Lexus dealer.

"Shift System Malfunction Shifting Unavailable Drive to a Safe Place and Stop"

Cause	Remedy
There is a malfunction in the shift control system.	Have the vehicle checked by your Lexus dealer immediately.

"Shift System Malfunction Driving Unavailable"

Cause	Remedy
There is a malfunction in the shift control system.	Have the vehicle checked by your Lexus dealer immediately.

"Shift System Malfunction Apply Parking Brake Securely When Parking See Owner's Manual"

Cause	Remedy
It may indicate a malfunction.	Have the vehicle checked by your Lexus dealer immediately.

"P Switch Malfunction Apply Parking Brake Securely When Parking See Owner's Manual"

Cause	Remedy
It may indicate a malfunction.	Have the vehicle checked by your Lexus dealer immediately.

"Shift System Unavailable Apply Parking Brake Securely When Parking See Owner's Manual"

Cause	Remedy
It may indicate a malfunction.	Have the vehicle checked by your Lexus dealer immediately.

"Shift System Malfunction See Owner's Manual"

Cause	Remedy
It may indicate a malfunction.	Have the vehicle checked by your Lexus dealer immediately.

"Shift System Malfunction Stop in a Safe Place See Owner's Manual"

Cause	Remedy
It may indicate a malfunction.	Have the vehicle checked by your Lexus dealer immediately.

"Key Battery Low Replace Key Battery"

Cause	Remedy
The electronic key has a low battery.	Replace the electronic key battery. (→P.619)

"System Malfunction Visit Your Dealer"

Cause	Remedy
Indicates one of the following systems is disabled. ● PCS (Pre-Collision System) ● LDA (Lane Departure Alert) ● LTA (Lane Tracing Assist) ● AHB (Automatic High Beam) ● AHS (Adaptive High-beam System)* ● Dynamic radar cruise control ● RSA (Road Sign Assist) ● BSM (Blind Spot Monitor) ● RCTA (Rear Cross Traffic Alert) ● Safe Exit Assist ● Lexus parking assist-sensor ● PKSB (Parking Support Brake) ● RCD (Rear camera detection)	Have the vehicle inspected by your Lexus dealer immediately.

*: If equipped

"System Stopped See Owner's Manual"

Cause	Remedy
Indicates one of the following systems is disabled. ● PCS (Pre-Collision System) ● LDA (Lane Departure Alert) ● LTA (Lane Tracing Assist) ● AHB (Automatic High Beam) ● AHS (Adaptive High-beam System)* ● Dynamic radar cruise control ● RSA (Road Sign Assist) ● BSM (Blind Spot Monitor) ● RCTA (Rear Cross Traffic Alert) ● Safe Exit Assist ● Lexus parking assist-sensor ● PKSB (Parking Support Brake) ● RCD (Rear camera detection)	Follow the following correction methods. ● Check the voltage of the 12-volt battery ● Check the sensors that the Lexus Safety System + uses for foreign matter covering them. Remove them if any. (→P.340) ● Check if the back door is open.
Indicates the sensors may not be operating properly. (→P.343,403,425,409,418,447,449,435)	● Check the rear bumper around the sensors used by the BSM, RCTA, or Safe Exit Assist for foreign matter covering them. Remove them if any. (→P.403,409) ● Check the sensors including camera sensors used by the Lexus parking assist-sensor, or PKSB for foreign matter covering them. Remove them if any. (→P.415) ● When problems are solved and the sensors are operational, this indication may disappear by itself.

*: If equipped

"System Stopped Front Camera Low Visibility See Owner's Manual"

Cause	Remedy
Indicates one of the following systems is disabled. ● PCS (Pre-Collision System) ● LDA (Lane Departure Alert) ● LTA (Lane Tracing Assist) ● AHB (Automatic High Beam) ● AHS(Adaptive High-beam System)* ● Dynamic radar cruise control ● RSA (Road Sign Assist)	Follow the following correction methods. ● Using the windshield wipers, remove the dirt or foreign matter from the windshield. ● Using the air conditioning system, defog the windshield. ● Close the hood, remove any stickers, etc. to clear the obstruction in front of the front camera.

"System Stopped Front Camera Out of Temp. Range Wait until Normal Temperature"

Cause	Remedy
Indicates one of the following systems is disabled. ● PCS (Pre-Collision System) ● LDA (Lane Departure Alert) ● LTA (Lane Tracing Assist) ● AHB (Automatic High Beam) ● AHS (Adaptive High-beam System)* ● Dynamic radar cruise control ● RSA (Road Sign Assist)	Follow the following correction methods. ● If the front camera is hot, such as after the vehicle is parked in the sun, use the air conditioning system to decrease the temperature around the front camera ● If a sunshade was used when the vehicle was parked, depending on its type, the sunlight reflected from the surface of the sunshade may cause the temperature of the front camera to become excessively high ● If the front camera is cold, such after the vehicle is parked in an extremely cold environment, use the air conditioning system to increase the temperature around the front camera

*: If equipped

"System Stopped Front Radar Sensor Blocked Clean Radar Sensor"

Cause	Remedy
Indicates one of the following systems is disabled. ● PCS (Pre-Collision System) ● LDA (Lane Departure Alert) ● LTA (Lane Tracing Assist) ● AHB (Automatic High Beam) ● AHS (Adaptive High-beam System)* ● Dynamic radar cruise control	Follow the following correction methods. ● Check if there is any foreign matter attached to the radar sensor or radar sensor cover and clean them if necessary. (→P.340) ● This message may be displayed when driving in an open area with few nearby vehicles or structures, such as a desert, grasslands, suburbs, etc. The message may be cleared by driving the vehicle in an area with structures, vehicles, etc. nearby.

"System Stopped Front Radar Sensor Out of Temp. Range Wait until Normal Temperature"

Cause	Remedy
Indicates one of the following systems is disabled. ● PCS (Pre-Collision System) ● LDA (Lane Departure Alert) ● LTA (Lane Tracing Assist) ● AHB (Automatic High Beam) ● AHS (Adaptive High-beam System)* ● Dynamic radar cruise control	The temperature of the radar sensor is outside of the operating range. Wait for the temperature to become appropriate.

*: If equipped

"System Stopped Front Radar In Self Calibration See Owner's Manual"

Cause	Remedy
Indicates one of the following systems is disabled. ● PCS (Pre-Collision System) ● LDA (Lane Departure Alert) ● LTA (Lane Tracing Assist) ● AHB (Automatic High Beam) ● AHS (Adaptive High-beam System)* ● Dynamic radar cruise control	Follow the following correction methods. ● Check if there is any foreign matter attached to the radar sensor or radar sensor cover and clean them if necessary. (→P.340) ● The radar sensor may be misaligned and will be adjusted automatically while driving. Continue driving for a while.

"Driver Monitor Out of Temperature Range Wait until Normal Temperature"

Cause	Remedy
Indicates one of the following systems is disabled. ● Driver monitor	The temperature of the driver monitor camera is outside of the operating range. Wait for the temperature to become appropriate.

"Driver Monitor Unavailable See Owner's Manual"

Cause	Remedy
The lens of the driver monitor camera may be dirty.	When there is dirt on the camera lens, clean it with a dry, soft cloth so as to not damage it.

"Cruise Control Unavailable See Owner's Manual"

Cause	Remedy
Indicates one of the following systems is disabled. ● Dynamic radar cruise control ● Cruise control A message is displayed when the driving assist switch is pushed repeatedly.	Press the driving assist switch quickly and firmly.

*: If equipped

"Parking Assist Unavailable Low Visibility See Owner's Manual"

Cause	Remedy
Indicates one of the following systems is disabled. ● RCD (Rear camera detection) ● PKSB (Parking Support Brake)	Remove any dirt or foreign matter from the rear cameras.

"Parking Assist Unavailable Sensor Blocked"

Cause	Remedy
A sensor may be covered with water drops, ice, snow, dirt, etc.	Remove the water drops, ice, snow, dirt, etc., from the sensor to return the system to normal. If a sensor is dirty, the position of the dirty sensor will be shown on the display.
Due to ice forming on a sensor at low temperatures, a warning message may be displayed or the sensor may not be able to detect an object.	Once the ice melts, the system will return to normal.
If a warning message is displayed even if the sensor is clean, there may be a sensor malfunction.	Have the vehicle inspected by your Lexus dealer.

"EV system malfunction"

Cause	Remedy
It may indicate a malfunction.	Have the vehicle inspected by your Lexus dealer immediately.

"Accelerator System Malfunction"

Cause	Remedy
It may indicate a malfunction.	Have the vehicle inspected by your Lexus dealer immediately.

"Plug-in Charging System Malfunction"

Cause	Remedy
It may indicate a malfunction.	Have the vehicle inspected by your Lexus dealer immediately.

"Traction battery system malfunction"

Cause	Remedy
It may indicate a malfunction.	Have the vehicle inspected by your Lexus dealer immediately.

"Battery Low"

Remedy
Follow the instructions. (→P.624)

⚠ NOTICE

■ "Battery Low" is displayed frequently

The 12-volt battery may have deteriorated. As the battery may discharge in this state when left unattended, have the battery inspected by your Lexus dealer.

"Regenerative Braking Limited Press Brake to Decelerate"

Cause	Remedy
Regenerative braking may be restricted in the following situations. ● When electrical energy cannot be regenerated any more as the traction battery is fully charged ● When the temperature of the traction battery is extremely high or extremely low ● When the temperature of the electric motor or power control unit, etc. is extremely high	Firmly depress the brake pedal to decelerate the vehicle.

When the EV system cannot be started even though the correct starting procedure is being followed

Cause	Remedy
The charging cable may be connected to the vehicle.	Remove the charging connector.
If the smart entry & start system has been disabled by a setting, the electronic key may not operate normally.	Make sure that the smart entry & start system has not been disabled by a customization setting. If the function has been disabled, enable it.
If the electronic key has been set to battery saving mode, it may not operate normally.	Check if electronic key has been set to battery saving mode. If it is, cancel the mode.
The traction battery may be completely discharged.	Charge the traction battery.
There may be a malfunction in the immobilizer system.	● If the key is touching or is covered by a metallic object, move the key away from the object. ● If the key is near to or touching a key to the security system (key with a built-in transponder chip) of another vehicle, move the key away from the other key.
There may be a malfunction in the steering lock system.*	Contact your Lexus dealer.
The EV system may be malfunctioning due to an electrical problem such as electronic key battery depletion or a blown fuse.	However, depending on the type of malfunction, a temporary measure is available to start the EV system.
There may be a malfunction in the shift control system.(1)	Contact your Lexus dealer.
There is a possibility that the temperature of the EV battery (traction battery) is extremely low (approximately below -30°C [-22°F]).	Try to start the EV system again after the temperature of the EV battery increases due to the outside temperature increase etc.

(1) It may not be possible to shift the shift position from P.

*: If equipped

Starting the EV system in an emergency

Pull the parking brake switch to check that the parking brake is set.

1 **Pull the parking brake switch to check that the parking brake is set.**

Parking brake indicator will come on.

2 **Check that the shift position is in P.**

3 **Change the power switch to ACC.**[*1*2]

4 **Press and hold the power switch for about 15 seconds while depressing the brake pedal firmly.**

Even if the EV system can be started using the above steps, the system may be malfunctioning.

Have the vehicle checked by your Lexus dealer immediately.

Starting the EV system when the electronic key is not operating normally

1 **Ensure that the shift position is in P and depress the brake pedal.**

2 **Touch the Lexus emblem side of the electronic key to the power switch.**

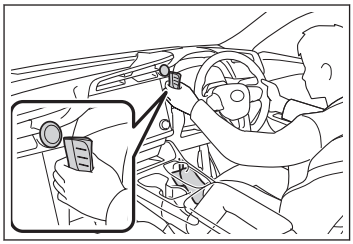

When the electronic key is detected, a buzzer will sound and the power switch mode will change to ON.

When the smart entry & start system is deactivated in customization setting and ACC customization is in on, the power switch will turn to ACC.

3 **Firmly depress the brake pedal and check that  is shown on the multi-information display.**

4 **Press the power switch shortly and firmly.**

In the event that the EV system still cannot be started, contact your Lexus dealer.

If you need further assistance, contact your Lexus dealer.

*1: ACC mode can be enabled/disabled on the customize menu. (→P.691)

*2: When ACC is disabled, turn the power switch to ON then OFF, and perform the following step within 5 seconds.

INFORMATION

Stopping the EV system

Shift the shift position to P, set the parking brake and press the power switch as you normally do when stopping the EV system.

Electronic key battery

As the above procedure is a temporary measure, it is recommended that the electronic key battery be replaced immediately when the battery is depleted. (→P.619)

Changing power switch modes

Release the brake pedal and press the power switch in step 3 above. The EV system will not start and the mode will be changed each time the switch is pressed. (→P.168)

When the interior lights or headlights are dim and the EV system cannot be started

Cause	Remedy
The 12-volt battery may be discharged. (→P.597)	Restarting the EV system using the jumper (or booster) cables. (→P.624)
The 12-volt battery terminals may be loose or corroded.	Check if a 12-volt battery terminal is loose or corroded.

If the vehicle 12-volt battery is discharged

⚠ WARNING

■ When replacing the 12-volt battery

- When the vent plug and indicator are close to the hold down clamp, the battery fluid (sulfuric acid) may leak.
- For information regarding 12-volt battery replacement, contact your Lexus dealer.

If the 12-volt battery discharges, it may not be possible to shift the shift position to other positions.

In this case, the vehicle cannot be towed without lifting both front wheels because the front wheels will be locked.

INFORMATION

■ When the 12-volt battery is removed or discharged

- In some cases, it may not be possible to unlock the doors using the smart entry & start system after the 12-volt battery has been replaced.

  Use the wireless remote control or the mechanical key to lock or unlock the doors.
- If the EV system cannot be started the first time the power switch is pressed after removing and installing the 12-volt battery, touch the Lexus emblem side of the electronic key to the power switch to start the EV system.
- The power switch mode is memorized by the vehicle.

  After the 12-volt battery has been recharged or replaced, the power switch will return to the mode it was in before it was discharged or removed.

  Before disconnecting the 12-volt battery, turn the power switch off.

  If you are unsure what mode the power switch was in before the 12-volt battery was discharged, be especially careful when reconnecting the 12-volt battery.

- Some systems may require initialization.

To prevent 12-volt battery discharge

- Turn off the headlights and the audio system while the EV system is off.
- Turn off any unnecessary electrical components when the vehicle is running at a low speed for an extended period, such as in heavy traffic.
- When ACC customization is in off, power is still provided to the multimedia system even though the power switch is off.

  To turn off the multimedia system, use the multimedia system power switch. For details, refer to"Multimedia Owner's Manual".

If the vehicle 12-volt battery is discharged

- The doors cannot be locked or unlocked using the smart entry & start system or wireless remote control, and the door opener switches will not operate. Use the mechanical key to enable/disable manual release handle operation. By enabling manual release handle operation, the door can be opened.
- Information recorded by various computers will be cleared.

  If the 12-volt battery has become discharged, have the vehicle inspected by your Lexus dealer.
- Some systems may require initialization.

Charging the 12-volt battery

The electricity stored in the 12-volt battery will discharge gradually even when the vehicle is not in use, due to natural discharge and the draining effects of certain electrical appliances.

If the vehicle is left for a long time, the 12-volt battery may discharge, and the EV system may be unable to start.

(The 12-volt battery recharges automatically while the EV system is operating.)

When replacing the 12-volt battery

- Use a 12-volt battery that the case size is same as the previous one (LN2), 20 hour rate capacity (20HR) is equivalent (60Ah) or greater, and performance rating (CCA) is equivalent (345A) or greater.
  - If the sizes differ, the 12-volt battery cannot be properly secured.
  - If the 20 hour rate capacity of the replacement battery is low, even if the vehicle is used frequently, the 12-volt battery may discharge and EV system may not be able to start.

For details, consult your Lexus dealer.

When the doors cannot be locked from outside the vehicle after the 12-volt battery was discharged

The doors cannot be locked using the smart entry & start system or wireless remote control.

Disabling the operation of the driver's door

1 Insert a plastic card, etc. into the gap in the door handle to pry up the cover.

To avoid damage, do not apply excessive force to the cover.

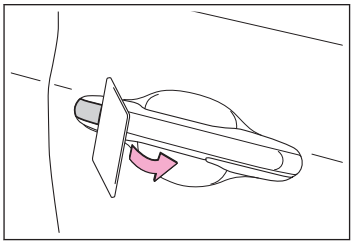

2 Remove the cover by pressing it on the rear.

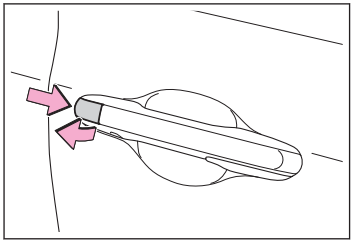

3 Using the mechanical key, turn the door lock to the lock side to disable the door.

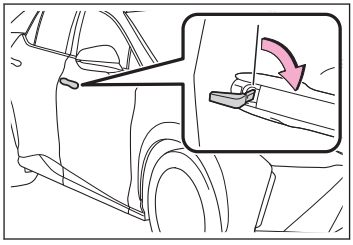

4 Check that the door cannot be opened.

Disabling the operation of doors other than the driver's door

1 Open the door. Using the mechanical key, slide the cover as shown in the illustration.

To avoid damage, do not apply excessive force to the cover.

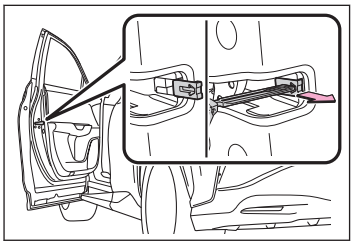

2 Insert the mechanical key into the opening.

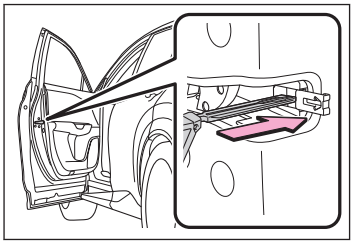

3 Remove the mechanical key and slide the emergency lock cover back to its original position.

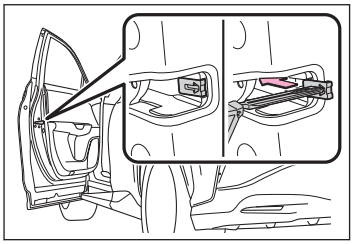

4 Check that all of the doors cannot be opened.

When removing the 12-volt battery terminals

When disconnecting a 12-volt battery terminal, contact your Lexus dealer.

If a 12-volt battery terminal is disconnected, the doors will not be able to be opened using the door opener switches and the electronic key may become trapped in the vehicle.

To prevent the electronic key (mechanical key) from being locked inside the vehicle, make sure to remove it from the vehicle before disconnecting a 12-volt battery terminal.

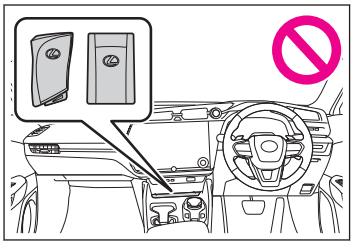

If the electronic key (mechanical key) is to be left in the vehicle, make sure to open a window so an inside manual release handle can be operated.

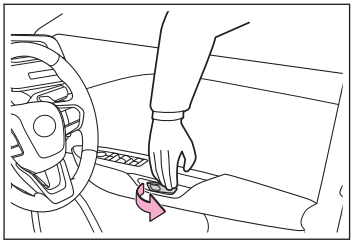

⚠ WARNING

■ When removing the 12-volt battery terminals

Always remove the negative (-) terminal first. If the positive (+) terminal contacts any metal in the surrounding area when the positive (+) terminal is removed, a spark may occur, leading to a fire in addition to electrical shocks and death or serious injury.

■ Avoiding 12-volt battery fires or explosions

Observe the following precautions to prevent accidentally igniting the flammable gas that may be emitted from the 12-volt battery:

- Make sure each jumper cable is connected to the correct terminal and that it is not unintentionally in contact with any other than the intended terminal.
- Do not allow the other end of the jumper cable connected to the [+] terminal to come into contact with any other parts or metal surfaces in the area, such as brackets or unpainted metal.
- Do not allow the + and - clamps of the jumper cables to come into contact with each other.
- Do not smoke, use matches, cigarette lighters or allow open flame near the 12-volt battery.

■ 12-volt battery precautions

The 12-volt battery contains poisonous and corrosive acidic electrolyte, while related parts contain lead and lead compounds. Observe the following precautions when handling the 12-volt battery:

- When working with the 12-volt battery, always wear safety glasses and take care not to allow any battery fluids (acid) to come into contact with skin, clothing or the vehicle body.
- Do not lean over the 12-volt battery.
- In the event that battery fluid comes into contact with the skin or eyes, immediately wash the affected area with water and seek medical attention.

  Place a wet sponge or cloth over the affected area until medical attention can be received.

⚠ WARNING

- Always wash your hands after handling the 12-volt battery support, terminals, and other battery-related parts.
- Do not allow children near the 12-volt battery.

INFORMATION

If a 12-volt battery terminal has been disconnected

- If a 12-volt battery terminal has been disconnected, the doors cannot be locked or unlocked using the smart entry & start system or wireless remote control, and the door opener switches will not operate.

  Make sure to remove the electronic key (mechanical key) from the vehicle before disconnecting a 12-volt battery terminal.

  If the electronic key (mechanical key) is to be left in the vehicle, open a window so an inside manual release handle can be operated.
- The doors may not be able to be unlocked using the smart entry & start system immediately after a 12-volt battery terminal is disconnected and reconnected.

  If the doors cannot be unlocked, use the wireless remote control or mechanical key to lock and unlock the doors.
- When a 12-volt battery terminal is disconnected, information recorded by various computers will be cleared.
- Some systems may require initialization.

When the interior lights or headlights do not illuminate and the EV system cannot be started

Cause	Remedy
The 12-volt battery may be discharged. (→P.597)	Restarting the EV system using the jumper (or booster) cables. (→P.624) Contact your Lexus dealer if the problem cannot be repaired, or if repair procedures are unknown.
One or both of the 12-volt battery terminals may be disconnected.	Check if a 12-volt battery terminal is disconnected. Contact your Lexus dealer if the problem cannot be repaired, or if repair procedures are unknown.
The steering lock system may be malfunctioning.*	Contact your Lexus dealer.

*: If equipped

When the horn sounds at a low volume and the EV system cannot be started

Cause	Remedy
The 12-volt battery may be discharged. (→P.597)	Restarting the EV system using the jumper (or booster) cables. (→P.624)
The 12-volt battery terminal connections may be loose or corroded.	The 12-volt battery terminals may be loose or corroded.

When the horn does not sound and the EV system cannot be started

Cause	Remedy
The 12-volt battery may be discharged. (→P.597)	Restarting the EV system using the jumper (or booster) cables. (→P.624) Contact your Lexus dealer if the problem cannot be repaired, or if repair procedures are unknown.
One or both of the 12-volt battery terminals may be disconnected.	Check if a 12-volt battery terminal is loose. Contact your Lexus dealer if the problem cannot be repaired, or if repair procedures are unknown.
The steering lock system may be malfunctioning.*	Contact your Lexus dealer.

*: If equipped

Repairing a tire with the emergency tire puncture repair kit

Your vehicle is not equipped with a spare tire, but instead is equipped with an emergency tire puncture repair kit. A puncture caused by a nail or screw passing through the tire tread can be repaired temporarily with the emergency tire puncture repair kit. (The kit contains a bottle of sealant. The sealant can be used only once to temporarily repair one tire without removing the nail or screw from the tire.) After temporarily repairing the tire with the kit, have the tire repaired or replaced by your Lexus dealer.

⚠ WARNING

Do not continue driving with a flat tire.

Driving even a short distance with a flat tire can damage the tire and the wheel beyond repair.

Driving with a flat tire may cause a circumferential groove on the side wall. In such a case, the tire may explode when using the emergency tire puncture repair kit, resulting in death or serious injury.

INFORMATION

■ A flat tire that cannot be repaired with the emergency tire puncture repair kit

In the following cases, the tire cannot be repaired with the emergency tire puncture repair kit.

Contact your Lexus dealer.

- When the tire is damaged due to driving without sufficient air pressure
- When the tire lost air pressure due to a crack or damage in the tire sidewall
- When the tire is visibly separated from the wheel
- When the cut or damage to the tread is 4 mm (0.16 in.) long or more
- When the wheel is damaged
- When two or more tires have been punctured
- When there is more than one hole or cut in the damaged tire
- When the sealant has expired

Preparing to use the emergency tire puncture repair kit

Before using the emergency tire puncture repair kit, perform the following.

1 **Stop the vehicle in a safe place on a hard, flat surface.**

2 **Set the parking brake.**

3 Change the shift position to P.

4 Stop the EV system.

5 Turn on the emergency flashers. (→P.563)

6 Check the degree of the tire damage.

A tire should only be repaired with the emergency tire puncture repair kit if the damage is caused by a nail or screw passing through the tire tread.

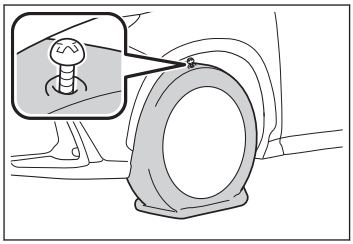

- Do not remove the nail or screw from the tire. Removing the object may widen the opening and disenable emergency repair with the kit.
- To avoid sealant leakage, move the vehicle until the area of the puncture, if known, is positioned at the top of the tire.

Storage position of the emergency tire puncture repair kit and tool

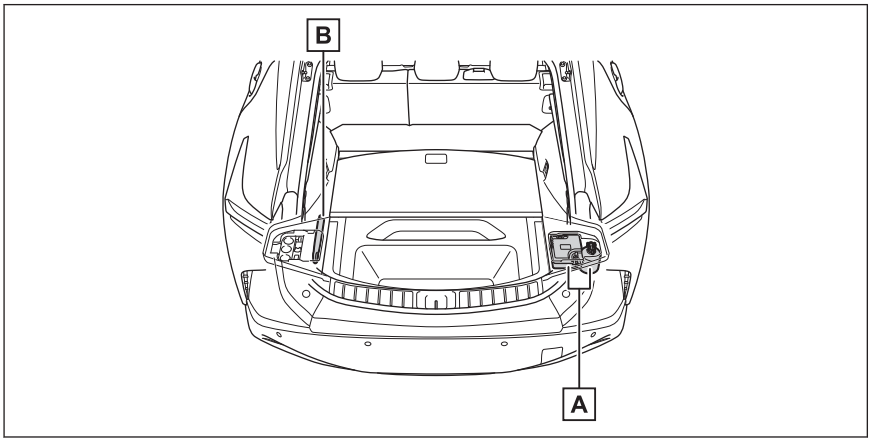

A Emergency tire puncture repair kit

B Towing eyelet

Emergency tire puncture repair kit details/name of each part

⚠ WARNING

■ Precautions for handling the emergency tire puncture repair kit

- The emergency tire puncture repair kit is made exclusively for your vehicle. Do not use it on other vehicles.
- Do not use the emergency tire puncture repair kit for tires that are a different size than the specified ones or for any other purpose.

⚠ WARNING

Doing so may cause the tires to not be repaired properly.

■ Precautions for use of the sealant

- Ingesting the sealant is hazardous to your health. If you ingest sealant, consume as much water as possible, then immediately consult a doctor.
- If sealant gets in eyes or adheres to skin, immediately wash it off with water. If discomfort persists, consult a doctor.

▶ Bottle

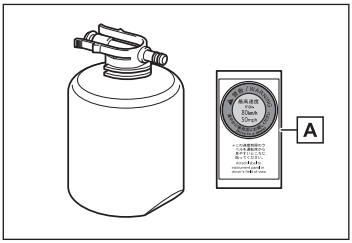

A Sticker

▶ Compressor

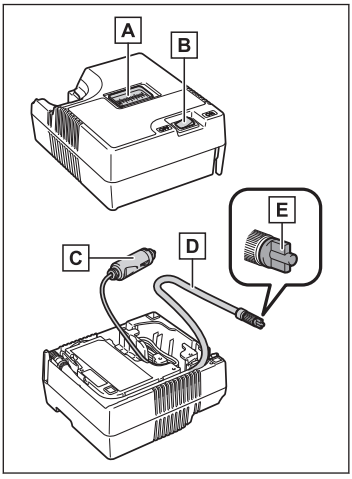

A Air pressure gauge
B Compressor switch
C Power plug
D Hose
E Air release cap

INFORMATION

■ Handling the emergency tire puncture repair kit/sealant

- The emergency tire puncture repair kit is designed to inflate vehicle tires.
- Do not use to check or to adjust the tire pressure.

- The kit is exclusively designed for size and type of tires originally installed on your vehicle. Do not use it for tires that a different size than the original ones, or for any other purposes.
- The sealant stored in the emergency tire puncture repair kit can be used only once to temporarily repair a single tire.

  If the sealant in the bottle and other parts of the kit have been used and need to be replaced, contact your Lexus dealer.
- The sealant can be used when the outside temperature is from -40°C (-40°F) to 60°C (140°F).
- If the sealant gets on your clothes, it may stain.
- If the sealant adheres to a wheel or the surface of the vehicle body, the stain may not be removable if it is not cleaned at once. Immediately wipe away the sealant with a wet cloth.
- The compressor can be used repeatedly.
- During operation of the kit, a loud operation noise is produced. This does not indicate a malfunction.

Checking the sealant

The sealant has a limited lifespan. Check the sealant expiration date occasionally.

The expiration date is printed on the bottle.

The sealant should be replaced before the expiry date. Contact your Lexus dealer.

Do not use sealant whose expiry date has already passed. Otherwise, repairs conducted using the emergency tire puncture repair kit may not be performed properly.

When disposing of the liquid sealant

The liquid sealant contains materials which are harmful to the environment. When disposing of liquid sealant or a liquid sealant bottle, contact your Lexus dealer or contact your local government for information on the appropriate authorized waste disposal method.

Taking out the emergency tire puncture repair kit

1 Fold the deck board.

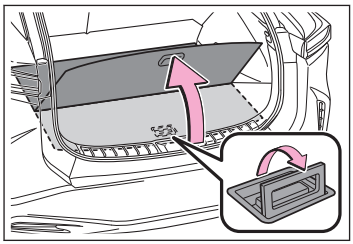

2 Remove the deck side board.

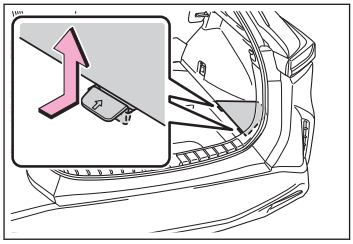

3 Take out the emergency tire puncture repair kit.

Repairing a flat tire

⚠ WARNING

Observe the following when repairing a flat tire.

- Stop your vehicle in a safe and flat area.
- Do not touch the wheels or the area around the brakes immediately after the vehicle has been driven.

  After the vehicle has been driven, the wheels and the area around the brakes may be extremely hot. Touching these areas with hands, feet or other body parts may result in burns.
- Perform repairs according to the specified procedure.

  If the procedure is not followed, the tire sealant may spray.

⚠ NOTICE

■ Precautions for repairing a flat tire

- Perform the emergency repair without removing the nail or screw that has punctured the tread of the tire. If the object that has punctured the tire is removed, repair by the emergency tire puncture repair kit may not be possible.
- The kit is not waterproof. Make sure that the kit is not exposed to water, such as when it is being used in the rain.
- Do not put the kit directly onto dusty ground such as sand at the side of the road. If the kit vacuums up dust, etc., a malfunction may occur.
- Make sure to stand the kit with the bottle vertical. The kit cannot work properly if it is laid on its side.

■ Handling the emergency tire puncture repair kit

- The compressor power source should be 12 V DC suitable for vehicle use. Do not connect the compressor to any other source.

NOTICE

- Take care not to allow gasoline to contact the emergency tire puncture repair kit. If gasoline splatters on the kit, it may deteriorate.
- Place the repair kit in a storage to prevent it from being exposed to dirt or water.
- Store the kit in its assigned place out of reach of children.
- Do not disassemble or modify the kit. Do not subject parts such as the air pressure indicator to impacts. This may cause a malfunction.

To avoid damage to the tire pressure warning valves and transmitters

When a tire is repaired with liquid sealants, the tire pressure warning valve and transmitter may not operate properly. If a liquid sealant is used, contact your Lexus dealer as soon as possible. After use of liquid sealant, make sure to replace the tire pressure warning valve and transmitter when repairing or replacing the tire. (→P.536)

1 **Take out the emergency tire puncture repair kit.**

The sticker enclosed with the bottle will be attached at a specified location. (See step 10)

2 **Pull out the hose and power plug from the compressor.**

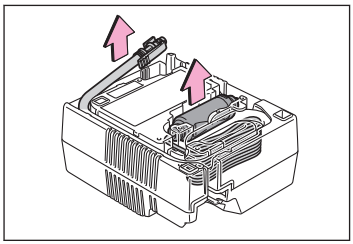

3 **Connect the bottle to the compressor.**

Insert the bottle straight into the compressor to connect it, and make sure that the claws are securely engaged to the compressor as shown in the illustration.

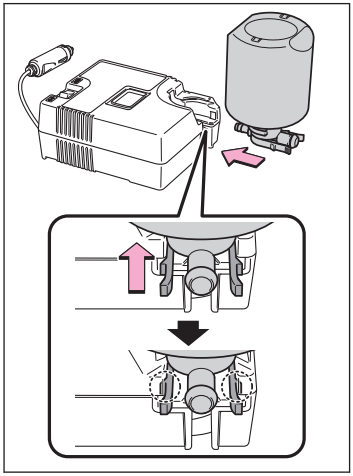

4 **Connect the hose to the bottle.**

Make sure that the hose is securely connected to the bottle, as shown in the illustration.

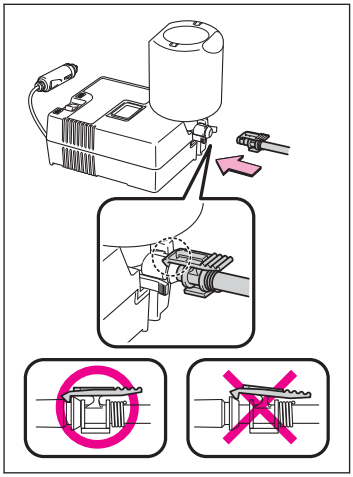

5 **Remove the valve cap from the valve of the flat tire.**

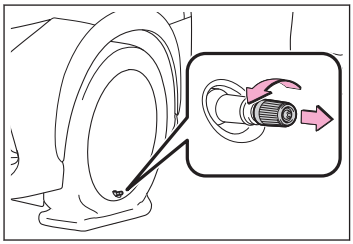

6 **Extend the hose. Remove the air release cap from the hose.**

The air release cap may be used later. Therefore keep it in a safe place.

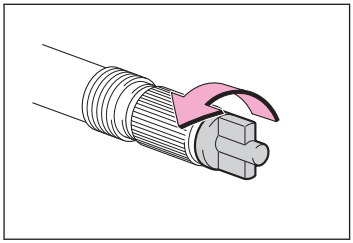

7 **Connect the hose to the valve of the flat tire.**

Screw the end of hose clockwise as far as possible.

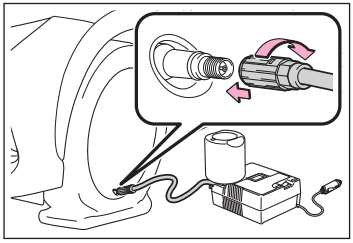

⚠ WARNING

Check the following.

- Make sure that the valve and hose are securely connected, with the tire installed on the vehicle.
- If the hose is not properly connected to the valve, air leakage may occur or sealant may be sprayed out.
- If the hose comes off the valve while inflating the tire, there is a risk that the hose will move abruptly due to air pressure.

8 **Make sure that the compressor switch is off.**

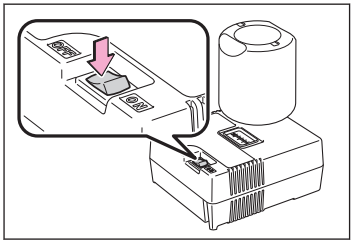

9 **Connect the power plug to the power outlet socket. (→P.280)**

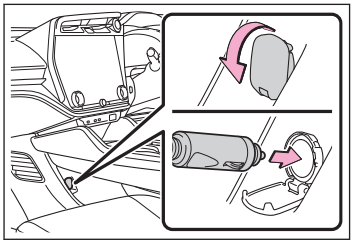

10 **Attach the sticker provided with the tire puncture repair kit to a position easily seen from the driver's seat.**

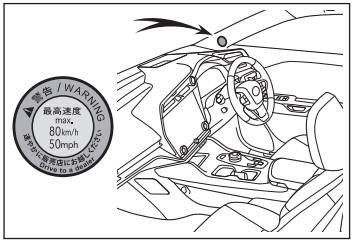

⚠ WARNING

Do not attach the vehicle speed warning sticker to an area other than the one indicated. If the sticker is attached to an area where an SRS airbag is located, such as the pad of the steering wheel, it may prevent the SRS airbag from operating properly.

11 **Check the specified tire inflation pressure.**

Tire inflation pressure is specified on the label as shown. (→P.668)

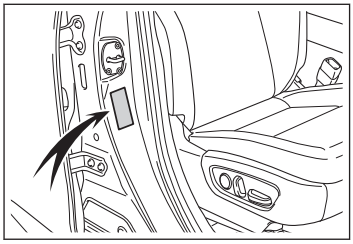

12 **Start the EV system. (→P.168)**

13 **To inject the sealant and inflate the tire, turn the compressor switch on.**

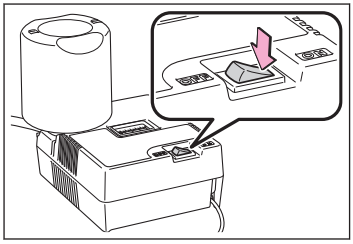

⚠ WARNING

Observe the following precautions.

- Keep back from the tire while it is being repaired, as there is a chance of it bursting while the repair operation is being performed. If you notice any cracks or deformation in the tire, turn off the compressor switch and stop the repair operation immediately.
- Do not operate the compressor continuously for more than 40 minutes. The kit may overheat if operated for a long period of time.
- Parts of the emergency tire puncture repair kit become hot during operation. Be careful when handling it during and after operation.
- Do not touch the metal connecting parts of the bottle and compressor while being used or immediately after, as they will be extremely hot.

14 **Inflate the tire until the specified pressure is reached.**

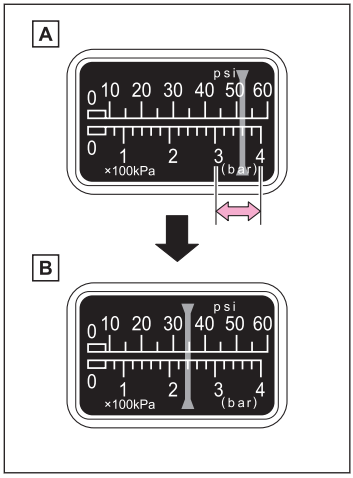

A The sealant will be injected and the pressure will spike to between 300 kPa (3.0 kgf/cm^2 or bar, 44 psi) and 400 kPa (4.0 kgf/cm^2 or bar, 58 psi), then gradually decrease.

B The air pressure gauge will display the actual tire inflation pressure about 1 to 5 minutes after the switch is turned on.

- Turn the compressor switch off and then check the tire inflation pressure. Being careful not to over inflate, check and repeat the inflation procedure until the specified tire inflation pressure is reached.
- The tire can be inflated for about 5 to 20 minutes (depending on the outside temperature). If the tire inflation pressure is still lower than the specified point after inflation for 25 minutes, the tire is too damaged to be repaired. Turn the compressor switch off and contact your Lexus dealer.

  If the tire inflation pressure exceeds the specified level, let out some air to adjust the tire inflation pressure. (→P.617,668)

15 **Make sure that the compressor switch is off and then disconnect the power plug from the power outlet and the hose from the valve of the tire.**

Some sealant may leak when the hose is removed.

⚠ WARNING

After inflation of the tire has completed, the sealant may splatter when the hose is disconnected or some air is let out of the tire.

16 **Install the valve cap onto the valve of the emergency repaired tire.**

17 **Attach the air release cap to the end of the hose.**

If the air release cap is not attached, the sealant may leak and dirty the interior of the vehicle or ones clothes.

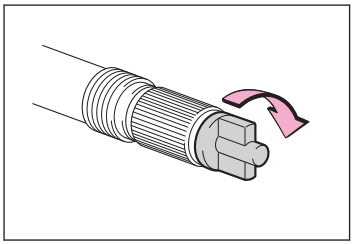

18 **Temporarily store the bottle in the luggage compartment while it is connected to the compressor.**

19 To spread the liquid sealant evenly within the tire, immediately drive safety for about 5 km (3 miles) below 80 km/h (50 mph).

⚠ WARNING

Observe the following precautions when driving to spread the sealant evenly.

- Drive the vehicle carefully at a low speed. Be especially careful when turning and cornering.
- If the vehicle does not drive straight or you feel a pull through the steering wheel, stop the vehicle and check the following:
  - Tire condition. The tire may have separated from the wheel.
  - Tire inflation pressure. If the tire inflation pressure is 130 kPa (1.3 kgf/cm^2 or bar, 19 psi) or below, this may indicate severe tire damage.

20 After driving, stop your vehicle in a safe place on a hard, flat surface and reconnect the emergency tire puncture repair kit.

Remove the air release cap from the hose before reconnecting the hose.

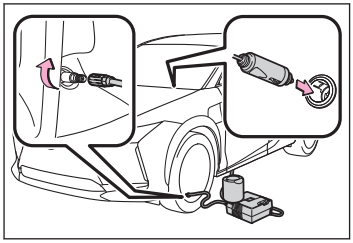

21 Turn the compressor switch on and wait for several seconds, then turn it off. Check the tire inflation pressure.

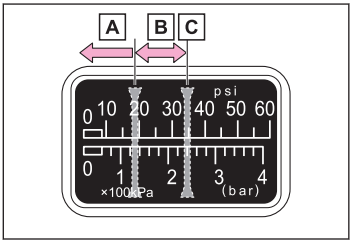

A If the tire inflation pressure is below 130 kPa (1.3 kgf/cm^2 or bar, 19 psi): The puncture cannot be repaired. Contact your Lexus dealer.

B If the tire inflation pressure is between 130 kPa (1.3 kgf/cm^2 or bar, 19 psi) and a point below the specified level: The tire can be repaired. Proceed to step 22.

C If the tire inflation pressure is at the specified level (→P.668): Proceed to step 23.

Even if the tire inflation pressure is at the recommended level, the tire pressure warning light may come on/flash.

22 Turn the compressor switch on to inflate the tire until the specified tire inflation pressure is reached. Drive for about 5 km (3 miles) and then perform step 20.

23 **Attach the air release cap to the end of the hose.**

If the air release cap is not attached, the sealant may leak and dirty the interior of the vehicle or ones clothes.

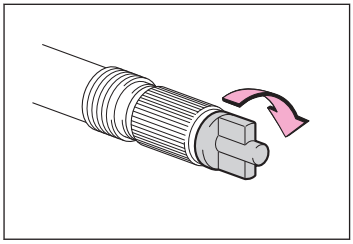

24 **Store the bottle in the luggage compartment while it is connected to the compressor.**

25 **Taking precautions to avoid sudden braking, sudden acceleration and sharp turns, drive carefully at under 80 km/h (50 mph) to your Lexus dealer that is less than 100 km (62 miles) away for tire repair or replacement.**

When having the tire repaired or replaced, make sure to tell the Lexus dealer that the sealant is injected.

After using the emergency tire puncture repair kit, have the vehicle inspected and the tire pressure warning valve and transmitter replaced by your Lexus dealer. Otherwise the tire inflation pressure may not be able to be measured correctly.

Decreasing the tire inflation pressure when a tire is overinflated

1 **Disconnect the hose from the valve.**

2 **Install the air release cap to the end of the hose and push the protrusion on the air release cap into the valve to let some air out.**

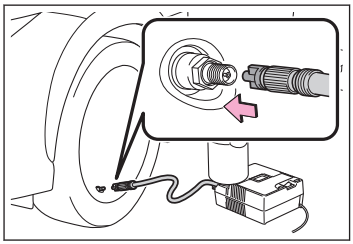

3 **Disconnect the hose from the valve, remove the air release cap from the hose and then reconnect the hose.**

4 **Turn the compressor switch on for a few seconds and then turn it off and check the tire inflation pressure.**

If the air pressure is lower than the specified level, turn the compressor switch on again and repeat the inflation procedure until the specified pressure is reached.

If a key has been lost

New genuine mechanical keys can be made by your Lexus dealer using another mechanical key and the key number stamped on your key number plate.

⚠ NOTICE

If the electronic key remains lost, the risk of vehicle theft increases significantly. Visit your Lexus dealer immediately with all remaining electronic keys and the card key* that were provided with your vehicle.

*: If equipped

When the doors/windows cannot be operated using an electronic key

If communication between the electronic key and vehicle is interrupted or the electronic key cannot be used because the battery is depleted, the smart entry & start system and wireless remote control cannot be used.

⚠ NOTICE

When taking the vehicle to your Lexus dealer due to a malfunction of the smart entry & start system, make sure to bring all registered electronic keys (including the card key).

- The smart entry & start system may have been disabled by a customize setting.

  In this case, change the customize setting to enable the smart entry & start system.
- The electronic key may have been set to battery saving mode.

  Battery saving mode has been set, cancel it.
- The battery of the electronic key may be discharged.

  Replace the battery.

  Using the mechanical key.
- The 12-volt battery may be discharged.

  Restarting the EV system using the jumper (or booster) cables. (→P.624)

Replace the electronic key battery

Replace the battery with a new one if it is depleted.

The battery for the card key is available only at Lexus dealers. Your Lexus dealer can replace the battery for you.

Prepare the following before replacing the battery:

- Flathead screwdriver
- Small flathead screwdriver
- Lithium battery CR2032

INFORMATION

■ Use a CR2032 lithium battery

- Batteries can be purchased at your Lexus dealer, local electrical appliance shops or camera stores.
- Replace only with the same or equivalent type recommended by the manufacturer.
- Dispose of used batteries according to the local laws.

If the electronic key battery is depleted

The following symptoms may occur:

- The smart entry & start system and wireless remote control will not function properly.
- The operational range will be reduced.

1 Take out the mechanical key.

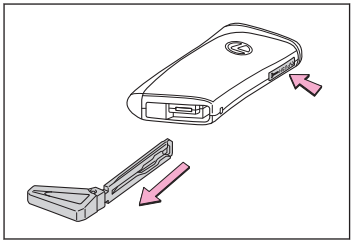

2 Remove the cover.

To prevent damage to the key, cover the tip of the flathead screwdriver with a tape.

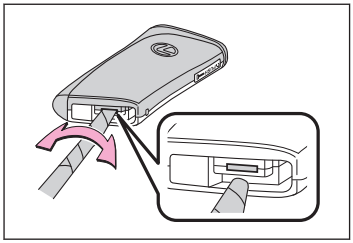

3 Remove the depleted battery.

Insert a new battery with the [+] terminal facing up.

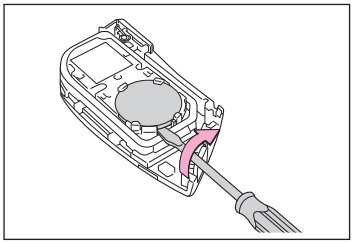

⚠ WARNING

Battery precautions

Observe the following precautions. Failure to do so may result in death or serious injury.

- Do not swallow the battery. Doing so may cause chemical burns.
- A coin battery or button battery is used in the electronic key. If a battery is swallowed, it may cause severe chemical burns in as little as 2 hours and may result in death or serious injury.
- Keep away new and removed batteries from children.

⚠ WARNING

- If the cover cannot be firmly closed, stop using the electronic key and stow the key in the place where children cannot reach, and then contact your Lexus dealer.
- If you accidentally swallow a battery or put a battery into a part of your body, get emergency medical attention immediately.

■ To prevent battery explosion or leakage of flammable liquid or gas

- Replace the battery with a new battery of the same type. If a wrong type of battery is used, it may explode.
- Do not expose batteries to extremely low pressure due to high altitude or extremely high temperatures.
- Do not burn, break or cut a battery.

⚠ NOTICE

■ When replacing the battery

Use a flathead screwdriver of appropriate size. Applying excessive force may deform or damage the cover.

■ For normal operation after replacing the battery

Observe the following precautions to prevent accidents:

- Always work with dry hands.

  Moisture may cause the battery to rust.
- Do not touch or move any other component inside the remote control.
- Do not bend either of the battery terminals.

Using the mechanical key

To take out the mechanical key, push the release button and take the key out.

The mechanical key can only be inserted in one direction, as the key only has a groove on one side. If the key cannot be inserted in a lock cylinder, turn it over and attempt to insert it again.

After using the mechanical key, return it to its original position and carry it with the electronic key. If the electronic key battery is depleted, the entry function is not operating properly, or the vehicle 12-volt battery is discharged, you will need the mechanical key.

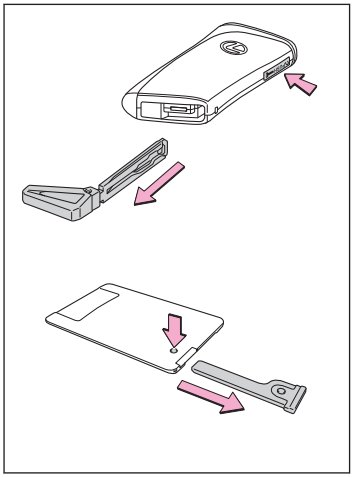

NOTICE

Do not apply excess force when inserting the mechanical key into the card key. Doing so may damage the card key.

INFORMATION

If the incorrect key is used

The key cylinder rotates freely to isolate inside mechanism.

Card key*

- If it is difficult to take out the mechanical key, push down the release button using a pen tip, etc. If it is still difficult to pull it out, use a coin, etc.
- To store the mechanical key in the card key, insert it while pressing the release button.



*: If equipped

Alarm

If a door is unlocked using the mechanical key when the alarm system is set, the alarm may be triggered.

Locking/unlocking the doors

1 **Insert a plastic card, etc. into the gap in the door handle to pry up the cover.**

To avoid damage, do not apply excessive force to the cover.

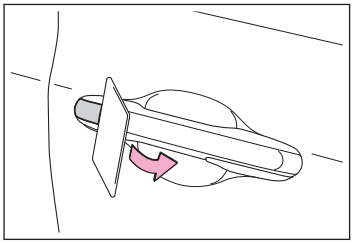

2 **Remove the cover by pressing it on the rear.**

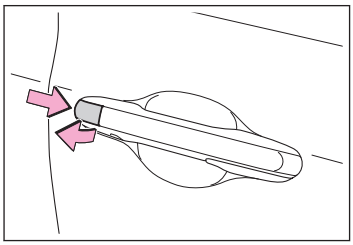

3 **Use the mechanical key in order to perform the following operations:**

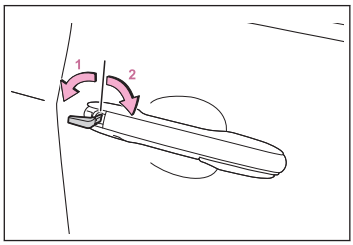

1 Unlocks all the doors
2 Locks all the doors

INFORMATION

Key linked functions



1 Opens the windows (turn and hold)*1
2 Closes the windows (turn and hold)*1

WARNING

Operate the power window after checking to make sure that there is no possibility of any passenger having any of their body parts caught in the window. Also, do not allow children to operate the mechanical key. It is possible for children and other passengers to get caught in the power window.

Restarting the EV system when the 12-volt battery is discharged

If you have a set of jumper (or booster) cables and a second vehicle with a 12-volt battery, you can jump start your vehicle by following the steps below.

INFORMATION

The EV system cannot be started by push-starting.

WARNING

Avoiding 12-volt battery fires or explosions

Observe the following precautions to prevent accidentally igniting the flammable gas that may be emitted from the 12-volt battery:

- Make sure each jumper cable is connected to the correct terminal and that it is not unintentionally in contact with any other than the intended terminal.
- Do not allow the other end of the jumper cable connected to the [+] terminal to come into contact with any other parts or metal surfaces in the area, such as brackets or unpainted metal.
- Do not allow the + and - clamps of the jumper cables to come into contact with each other.

*1: These settings must be customized at your Lexus dealer.

⚠ WARNING

- Do not smoke, use matches, cigarette lighters or allow open flame near the 12-volt battery.

■ 12-volt battery precautions

The 12-volt battery contains poisonous and corrosive acidic electrolyte, while related parts contain lead and lead compounds. Observe the following precautions when handling the 12-volt battery:

- When working with the 12-volt battery, always wear safety glasses and take care not to allow any battery fluids (acid) to come into contact with skin, clothing or the vehicle body.
- Do not lean over the 12-volt battery.
- In the event that battery fluid comes into contact with the skin or eyes, immediately wash the affected area with water and seek medical attention. Place a wet sponge or cloth over the affected area until medical attention can be received.
- Always wash your hands after handling the 12-volt battery support, terminals, and other battery-related parts.
- Do not allow children near the 12-volt battery.

1 **Confirm that the electronic key is being carried.**

When connecting the jumper (or booster) cables, depending on the situation, the alarm may activate and the doors may lock.

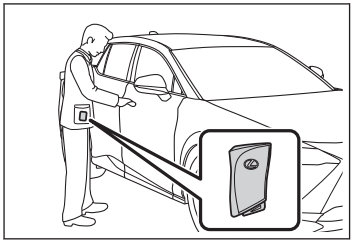

2 **Open the hood**

3 **Open the positive (+) battery terminal cover.**

While pressing on the claw, open the cover as shown in the illustration.

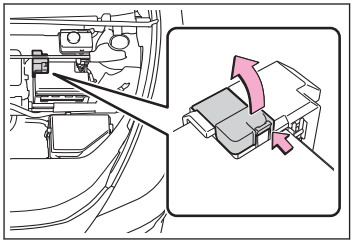

4 **Connect a positive jumper cable clamp to A on your vehicle and connect the clamp on the other end of the positive cable to B on the second vehicle. Then,**

connect a negative cable clamp to C on the second vehicle and connect the clamp at the other end of the negative cable to D.

Use jumper cables that can reach the specified terminals and connecting point.

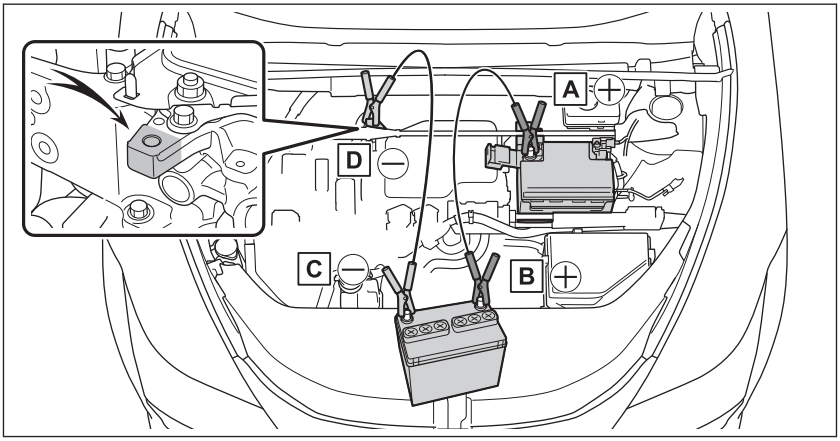

A Positive (+) battery terminal (your vehicle)
B Positive (+) battery terminal (second vehicle)
C Negative (-) battery terminal (second vehicle)
D Metallic point shown in the illustration

NOTICE

12-volt battery precautions

When connecting the jumper cables, ensure that they do not become entangled in the cooling fan or belt.

When connecting jumper cables

Make sure to connect jumper cables to the specified terminals and connecting point. Failure to do so may adversely affect the electronic devices or damage to them.

5 Start the engine of the second vehicle. Increase the engine speed slightly and maintain at that level for approximately 5 minutes to recharge the 12-volt battery of your vehicle.

6 Open and close any of the doors of your vehicle with the power switch off.

7 Maintain the engine speed of the second vehicle and start the EV system of your vehicle by turning the power switch to ON.

8 Make sure the "READY" indicator comes on.

If the indicator light does not come on, contact your Lexus dealer.

9 **Once the EV system has started, remove the jumper cables in the exact reverse order from which they were connected.**

10 **Close the positive (+) battery terminal cover.**

Once the EV system starts, have the vehicle inspected at your Lexus dealer as soon as possible.

If a door cannot be opened using the door opener switch

If a door cannot be opened using the door opener switch, it can be opened using a manual release handle.

Operating a manual release handle

⚠ NOTICE

Normally, the manual release handles cannot be used to open the doors. To enable manual release handle operation, perform the following. If the following is not performed and/or a manual release handle is operated with force, it may deform or be damaged.

▶ Outside the vehicle

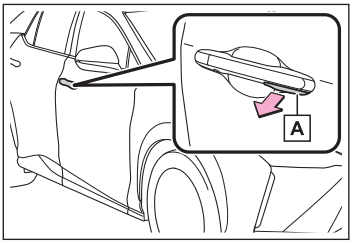

Pull the manual release handle A to open the door.

Normally, the manual release handles cannot be used to open the doors.

To open a door, enable manual release handle operation. (→P.628)

▶ Inside the vehicle

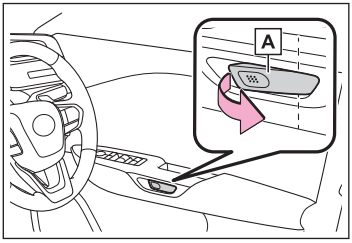

Pull the manual release handle A twice to open the door.

Pulling the handle once will enable operation. Pulling the handle again will open the door.

INFORMATION

■ Manual release handle operating conditions

- If the vehicle is involved in a severe frontal or rear collision, manual release handle operation will be enabled for all of the doors.

  However, the manual release handle may not become operable depending on the force of the impact and conditions of the collision.
- When the 12-volt battery voltage drops slowly while a door was unlocked

  It may not work depending on how it is lowered.

- When manual release handle operation is enabled from inside the vehicle



- When manual release handle operation is enabled from outside the vehicle using a mechanical key



Conditions which manual release handle operation is disabled

- Normally, operation of the outside manual release handles is disabled, and they cannot be used to open the doors.

  When operation is enabled by operating a manual release handle or using a mechanical key, operation will be disabled automatically if the door is opened using the door opener switch or locked.

- Operation of the inside manual release handles is disabled when the power switch is in ON, and they cannot be used to open the doors.

  When operation is enabled by operating a manual release handle or using a mechanical key, operation will be disabled automatically if the door is opened using the door opener switch or locked.

- To prevent a door from being opened accidentally, when the power switch is in ON, after an inside manual release handle is operated once, operation will automatically be disabled after approximately 1 second.

Enabling outside manual release handle operation using a mechanical key

Operation of a manual release handle can be enabled by unlocking a door with the mechanical key. (→P.622)

1 **Insert a plastic card, etc. into the gap in the door handle to pry up the cover.**

To avoid damage, do not apply excessive force to the cover.

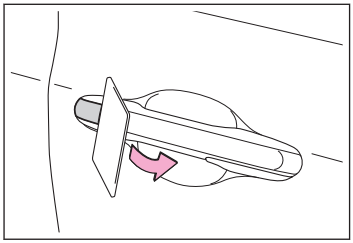

2 **Remove the cover by pressing it on the rear.**

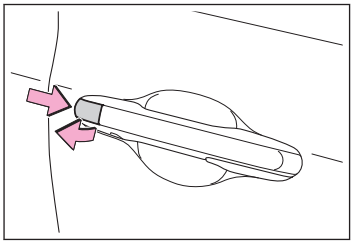

3 **Using the mechanical key, turn the lock cylinder to the unlock side to enable the manual release handle operation.**

The mechanical key can only be inserted in one direction, as the key only has a groove on one side.

If the key cannot be inserted in a lock cylinder, turn it over and re-attempt to insert it.

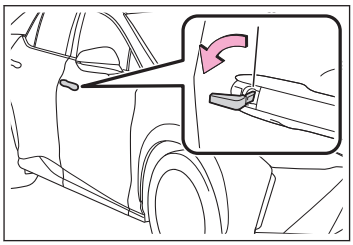

If the rear doors cannot be opened from the inside

The child-protector lock may be engaged.

Open the door from outside the vehicle and disengage the child-protector lock. (→P.73)

If the back door cannot be opened

The back door can be unlocked from the inside.

1 **Using a flathead screwdriver, remove the cover.**

To protect the cover, place a rag between the flathead screwdriver and the cover as shown in the illustration.

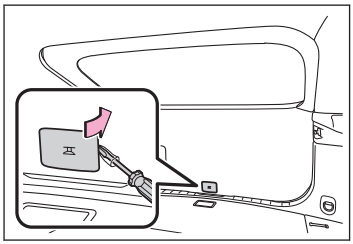

2 **Loosen the screw and turn back the cover.**

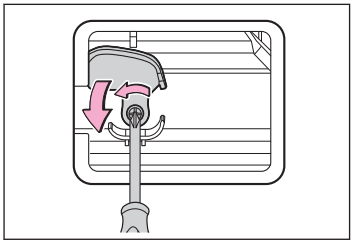

3 **Using a screwdriver, push the lever.**

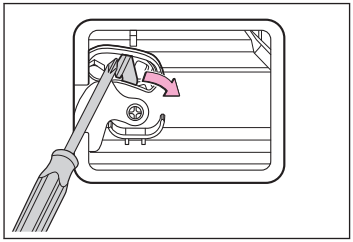

4 **When installing, reverse the steps listed.**

If the charging port lid cannot be opened

If the charging port lids cannot be opened when using the normal procedure, the following procedure can be used to open the charging port lid.

1 **Open the hood. (→P.517)**

2 **Pull the ring section horizontally toward the inside of the vehicle.**

After the unlocking operation is completed, push the ring part back to its original position until it clicks into place.

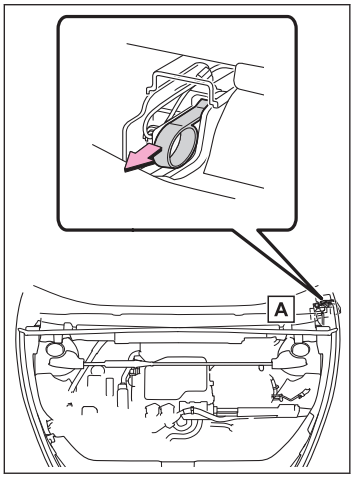

A Emergency release lever

INFORMATION

When unlocking with the emergency release lever

Be sure to observe the following.

- Do not apply excessive force to the ring part
- Do not pull horizontally too much

Use only in an emergency.

If the problem persists, have the vehicle inspected by your Lexus dealer immediately if this occurs.

If AC charging cannot be performed normally

Charging indicator of the charging port does not illuminate

Cause	Remedy
The plug is not properly connected to the socket	Check that the plug is properly connected to the socket.
AC charging connector is not securely connected to AC charging inlet	Check the connection status of the AC charging connector. ● When connecting the AC charging connector, insert the charging connector securely. ● After connecting the AC charging connector, check that the charging indicator of the charging port is turned on. If the charging indicator of the charging port does not illuminate, even though the charging connector is securely connected, there may be a malfunction in the system. Immediately stop charging and contact your Lexus dealer.
Traction battery is already fully charged	When the traction battery is fully charged, AC charging is not performed.
The remaining charge of the traction battery exceeds the set upper limit of the charge capacity	Change to a higher upper limit setting than the current remaining charge capacity and perform charging again. (→P.51)
The charger does not operate	Please contact the facility manager when there is a problem with charger.
Power is out	After power is restored, carry out the charging procedure again.
Remote switch is off	If the remote switch is equipped, turn the switch on.
Building breaker is tripped and power is cut off	Check that the breaker is connected and if there is no malfunction, check if the vehicle can be charged through another socket. If charging is possible, the first socket may have a malfunction. Contact the building or facility manager, or an electrician.

When the charging indicator on the charging port is blinking and charging cannot be carried out

Cause	Remedy
When charging indicator of the charging port flashes(1): Charging schedule is registered	When you wish to charge according to the charging schedule, wait until the set time. To start charging, set [**Charge now**] to on. (→P.69)
When charging indicator of the charging port rapidly flashes(1): Malfunction occurred in an external power source or the vehicle	When a door is opened with the power switch off, a message is displayed on the multi-information display. Follow instructions displayed. (→P.577)

(1) Refer to P.39 for details regarding charging indicator of the charging port illumination and flashing.

If DC charging cannot be performed normally

DC charging does not start

Cause	Remedy
The DC charging connector is not properly connected to the vehicle.	Check the connection status of the DC charging connector and be sure that it is locked. If the DC charging does not start, even though the DC charging connector is securely connected, there may be a malfunction with the DC charger or charging system. ● If there is a malfunction with the DC charger, contact the charging station manager. ● If there is not a malfunction with the DC charger, there may be a malfunction in the system. Contact your Lexus dealer. ● If there is an error in the connection status due to the weight of the connector, disconnect the connector and then reconnect it. Lift and hold the connector in place for about 3 seconds after reinserting it until it locks. If the connector still does not lock, check if it can be charged with another DC charger.
The DC charging connector is not securely locked.	
Error is detected by the DC charger or vehicle's system check.	There may be a malfunction with the DC charger or charging system. ● If there is a malfunction with the DC charger, contact the facility manager. ● If there is not a malfunction with the DC charger, there may be a malfunction in the system. Contact your Lexus dealer. ● If the EV system cannot be started, contact your Lexus dealer.
The DC charger power goes off.	Contact the charging station manager and check the power status.
Traction battery is already fully charged	When the traction battery is fully charged, DC charging cannot be performed.
The remaining charge of the traction battery exceeds the set upper limit of the charge capacity	Change to a higher upper limit setting than the current remaining charge capacity and perform charging again. (→P.51)

Cause	Remedy
The EV system is started.	When the EV system is started, DC charging cannot be started. Also, if the shift position is not in P, DC charging cannot be performed.
DC charging was repeatedly performed	After waiting a few minutes after starting the EV system, stop the EV system and perform charging again.

When DC charging is interrupted

Cause	Remedy
The timer for the DC charger operates.	Depending on the type of the DC charger, the timer may be set to stop charging after a certain time. Check with the charging station manager.
The power for the DC charger is off.	Check the power status of the DC charger. If there are uncertainties with the power status, contact the charging station manager.
The temperature of the traction battery is extremely high or low.	DC charging may not be performed in extremely high or extremely low temperature environments. Charge the traction battery after the temperature has been stabilized.
Error is detected by the DC charger or vehicle's system check.	There may be a malfunction with the DC charger or charging system. ● If there is a malfunction with the DC charger, contact the facility manager. ● If there is not a malfunction with the DC charger, there may be a malfunction in the system. Contact your Lexus dealer. ● If the EV system cannot be started, contact your Lexus dealer.
High temperature of charging related parts	If the temperature of charging related parts is high, DC charging may not be possible. Wait for a while and then charge again.
The electrical components such as the air conditioning system stop operating while the traction battery is approximately fully charged.	Keep the electrical components such as the air conditioning system in the OFF state, and then perform the DC charging procedure again.

EV system does not start after DC charging

Cause	Remedy
Charging system check is not completed properly after DC charging.	Do a system check following the procedures on P.584. If the system check cannot be completed properly even after these procedures are performed, contact your Lexus dealer.
The DC charging connector is still connected.	For safety, the EV system cannot be started when the DC charging connector is connected. (→P.47) Remove the DC charging connector immediately after the charging is completed.
The DC charging system is malfunctioning	● Depending on the type of malfunction, the EV system can be started after closing the charging port lid. ● If the EV system cannot be started, contact your Lexus dealer.

If the charging connector cannot be disconnected from the charging inlet

If the charging connector cannot be unlocked

The charging connector can be unlocked by operating the emergency release wire.

1 Open the hood. (→P.517)

2 Pull the emergency release wire.

The charging connector is unlocked and can be removed.

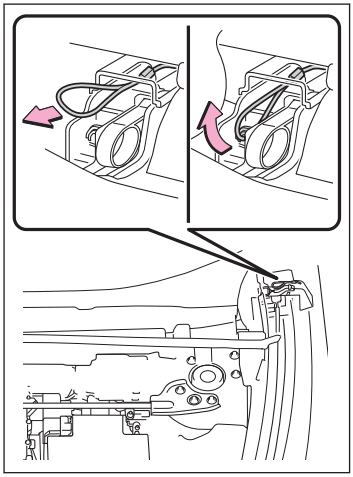

3 After unlocking the charging connector, fix the handle of the emergency release wire to the attachment.

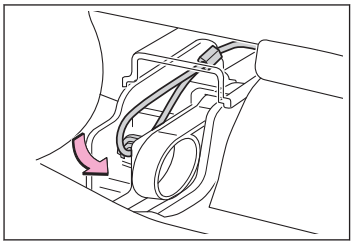

If the charging schedule function does not operate normally

Cannot charge at desired time

Cause	Remedy
The vehicle calendar or clock is not set correctly.	Check the calendar setting and set it to the correct date.(1)
AC charging connector is not connected to vehicle	Before using the charging schedule, connect the AC charging connector.
AC charging connector was connected after set time	Connect the AC charging connector before the time set in [**Start at set time**]. When the charging mode is set to [**Start and stop at set times**], the traction battery will charge even if the start time has passed, if the AC charging connector is connected before the stop time.

(1) For the setting procedure for the clock, refer to the "Multimedia Owner's Manual".

Charging starts, even though charging schedule is registered

Cause	Remedy
[**Charge now**] is set to on	When charging according to the charging schedule, set [**Charge now**] to off. (→P.69)
Charging schedule is set to off	Check that charging schedule is not set to off. (→P.68)
AC charging connector was removed and reinserted while charging indicator of the charging port was flashing	If the AC charging connector is removed and reinserted while the charging indicator is flashing, the charging schedule is canceled. Temporarily remove the AC charging connector, and then reconnect it.
My Room Mode was operated	When My Room Mode is operated, the system will start charging, even if the charging schedule is registered. To carry out charging using the charging schedule, stop My Room Mode, and then reconnect the AC charging cable.

Charging does not start, even though it is time set in [Start at set time]

Cause	Remedy
AC charging cable was connected after set time	Connect the AC charging cable before the time set in [**Start at set time**].

When the wireless charger operation indicator light (on the charging tray) flashes*

When the wireless charger indicator light continuously flashes once per second (orange / green)

Operation indicator light		Suspected causes/Handling method
Charging tray side	Center Display side	
Orange (Flashing repeatedly once every second)	Gray	Vehicle to wireless charger communication failure If the EV system is started, stop and then restart the EV system. If the power switch is in ACC, start the EV system. (→P.168)
Green (Flashing repeatedly once every second)	Disappear	Wireless charger and multimedia system communication failure If the EV system is started, stop and then restart the EV system. If the power switch is in ACC, start the EV system. (→P.168)

If the indicator light illuminates alternatively in orange and green, refer to P.284.

*: If equipped

When the wireless charger indicator light continuously flashes 3 times quickly (orange)

Cause	Remedy
The following causes are possible. ● Foreign matter detected: If a metallic foreign object is detected in the charge area, the overheat prevention function of the metallic foreign object will operated ● Portable device not aligned correctly: If the charging coil of a portable device is not properly positioned on the charging area, the overheat prevention function will operated	● Remove the foreign object from the charge area. ● Remove the portable device from the charging tray, check that the operation indicator light changes back to green, and then place the portable device so that it is near the center of the charging tray. Also, if a case or cover is installed to the portable device, remove it.

When the wireless charger indicator light continuously flashes 4 times quickly (orange)

Cause	Remedy
The temperature inside the wireless charger may have become too high.	Stop charging, remove the portable device from the charging tray, and wait for the temperature to decrease before attempting to begin charging again.

When a EV system warning message is displayed and the vehicle does not move

There may be a problem with the drivetrain.

Contact your Lexus dealer or commercial towing service before towing.

If the transmission makes abnormal sounds

There may be a problem with the drivetrain.

Contact your Lexus dealer or commercial towing service before towing.

Towing with a tow truck

Towing with a tow truck

If towing is necessary, we recommend having your vehicle towed by your Lexus dealer or a commercial towing service, using a wheel-lift type truck or flatbed truck. Use a safety chain system for all towing, and abide by all state/provincial and local laws.

⚠ WARNING

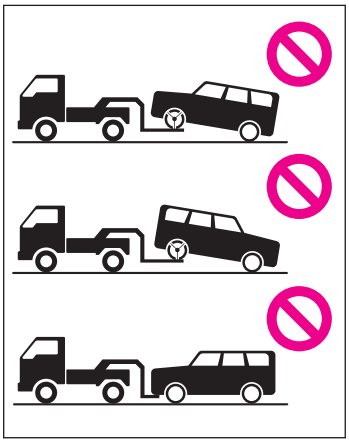

Be sure to transport the vehicle with all four wheels raised off the ground. If the vehicle is towed with the tires contacting the ground, the drivetrain or related parts may be damaged, the vehicle may fly off the truck, or electricity generated by the operation of the motor may cause a fire to occur depending on the nature of the damage or malfunction.

⚠ NOTICE

■ To prevent damage to the vehicle when towing using a wheel-lift type truck

- Vehicles with a steering lock function: Do not tow the vehicle from the rear when the power switch is off. The steering lock mechanism is not strong enough to hold the front wheels straight.
- When raising the vehicle, ensure adequate ground clearance for towing at the opposite end of the raised vehicle. Without adequate clearance, the vehicle could be damaged while being towed.

⚠ NOTICE

■ Towing with a sling-type truck



Do not tow with a sling-type truck to prevent body damage.

▶ From the front

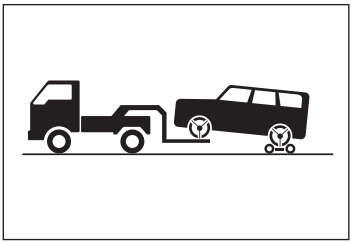

Use a towing dolly under the rear wheels.

▶ From the rear

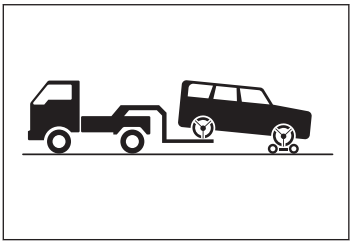

Use a towing dolly under the front wheels.

Using a flatbed truck

When using a flat-bed truck to transport the vehicle, use tire strapping belts. Refer to the owner's manual of the flat-bed truck for the tire strapping method.

In order to suppress vehicle movement during transportation, set the parking brake and turn the power switch off.

Towing with another vehicle

If towing is necessary, we recommend having your vehicle towed by your Lexus dealer or a commercial towing service, using a wheel-lift type truck or flatbed truck.Use a safety chain system for all towing, and abide by all state/provincial and local laws.

Emergency towing

If a tow truck is not available in an emergency, your vehicle may be temporarily towed using cables or chains secured to the emergency towing eyelets. This should only be attempted on hard surfaced roads for short distances at under 30 km/h (18 mph).

A driver must be in the vehicle to steer and operate the brakes. The vehicle's wheels, drive train, axles, steering and brakes must be in good condition.

Situations when it is not possible to be towed by another vehicle

In the following situations, it is not possible to be towed by another vehicle using cables or chains, as the front wheels may be locked due to the parking lock.

Contact your Lexus dealer or commercial towing service.

- There is a malfunction in the shift control system. (→P.586)
- There is a malfunction in the immobilizer system. (→P.105)
- There is a malfunction in the smart entry & start system. (→P.619)
- The 12-volt battery is discharged. (→P.624)

Emergency towing procedure

To have your vehicle towed by another vehicle, the towing eyelet must be installed to your vehicle. Install the towing eyelet using the following procedure.

⚠ WARNING

Do not perform any of the following as doing so may cause the parking lock mechanism to engage, locking the front wheels and possibly leading to an accident resulting in death or serious injury:

- Unfasten the driver's seat belt and open the driver's door.
- Turn the power switch off.

1 **Take out the towing eyelet.**

2 **Remove the eyelet cover using a flathead screwdriver.**

To protect the bodywork, place a rag between the screwdriver and the vehicle body as shown in the illustration.

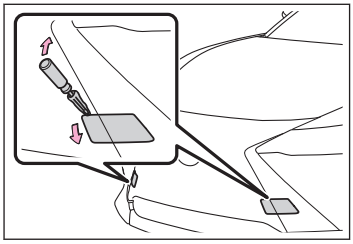

3 **Insert the towing eyelet into the hole and tighten partially by hand.**

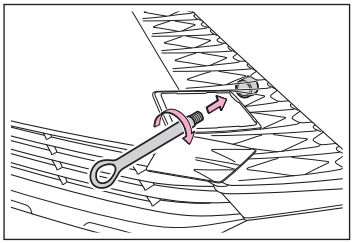

4 **Tighten down the towing eyelet securely using a wheel bolt wrench*1 or hard metal bar.**

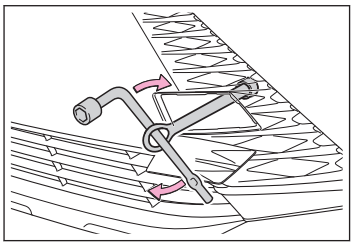

INFORMATION

Wheel bolt wrench

Wheel bolt wrench can be purchased at your Lexus dealer.

WARNING

When installing towing eyelets to the vehicle, make sure to securely install them to the specified positions.

If not securely installed, towing eyelets may come loose during towing.

5 **Securely attach cables or chains to the towing eyelet.**

Take care not to damage the vehicle body.

*1: Wheel bolt wrench can be purchased at your Lexus dealer.

NOTICE

To prevent damage to the vehicle during emergency towing, do not secure cables or chains to the suspension components.

6 **Enter the vehicle being towed and start the EV system.**

If the EV system does not start, turn the power switch to ON.

INFORMATION

While towing

If the EV system is off, the power assist for the brakes and steering will not function, making steering and braking more difficult.

WARNING

Do not turn the power switch off while towing the vehicle with another vehicle. This may lead to an accident as the front wheels will be locked by the parking lock.

7 **Shift the shift position to N and release the parking brake.**

Turn auto mode of the parking brake off.

WARNING

When towing, avoid sudden starts, etc., which place excessive stress on the towing eyelets, cables or chains. The towing eyelets, cables or chains may become damaged, broken debris may hit people, and cause serious damage.

Getting unstuck from mud, sand, or snow

1 Stop the EV system. Set the parking brake and shift the shift position to P.

2 Remove the mud, snow or sand from around the front wheels.

3 Place wood, stones or some other material under the front wheels to help provide traction.

4 Restart the EV system.

5 Shift the shift position to D or R and release the parking brake. Then, while exercising caution, depress the accelerator pedal.

⚠ WARNING

■ When attempting to free a stuck vehicle

If you choose to push the vehicle back and forth to free it, make sure the surrounding area is clear to avoid striking other vehicles, objects or people. The vehicle may also lunge forward or lunge back suddenly as it becomes free. Use extreme caution.

■ When shifting the shift position

Be careful not to shift the shift position with the accelerator pedal depressed. This may lead to unexpected rapid acceleration of the vehicle that may cause an accident resulting in death or serious injury.

⚠ NOTICE

- Avoid spinning the tires and depressing the accelerator pedal more than necessary.
- If the vehicle remains stuck even after these procedures are performed, the vehicle may require towing to be freed.

6 If it is difficult to free the vehicle, press the switch and turn the TRC off.

If the vehicle remains stuck even after these procedures are performed, the vehicle may require towing to be freed.

⚠ NOTICE

■ Emergency hook

When stuck in a snow drift, etc. and you are unable to drive out, the emergency hook can be used to pull the vehicle out with another vehicle. It cannot be used to tow another vehicle, nor is it designed for any type of towing.

If a vehicle abnormality is found

The following symptoms are abnormal.

- Fluid leaks under the vehicle

  Water dripping from the air conditioning after use is normal.

- Flat-looking tires or uneven tire wear

Contact your Lexus dealer as soon as possible. Your vehicle probably needs adjustment or repair.

If abnormal sounds are emitted from the vehicle

The following sounds are abnormal sounds.

- Excessive tire squeal when cornering
- Strange noises related to the suspension system
- Other noises related to the EV system

Contact your Lexus dealer as soon as possible. Your vehicle probably needs adjustment or repair.

If the vehicle behaves abnormally

The following symptoms are abnormal.

- Stumbling or running roughly
- Appreciable loss of power
- Vehicle pulls heavily to one side when braking
- Vehicle pulls heavily to one side when driving on a level road
- Loss of brake effectiveness, spongy feeling, pedal almost touches the floor

Contact your Lexus dealer as soon as possible. Your vehicle probably needs adjustment or repair.

The steering wheel cannot be turned after the EV system is stopped*1

It is locked automatically to prevent theft of the vehicle. (→P.170)

- When the steering lock cannot be released, **"Push Power Switch while Turning Steering Wheel in Either Direction"** will be displayed on the multi-information display. Check that the shift position is in P. Press the power switch while turning the steering wheel left and right.

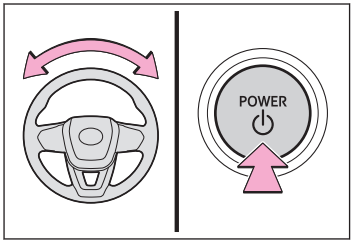

- To prevent the steering lock motor from overheating, operation of the motor may be suspended if the EV system is turned on and off repeatedly in a short period of time. In this case, refrain from operating the EV system. After about 10 seconds, the steering lock motor will resume functioning.

*1: Vehicles with a steering lock function

If the windows do not open or close by operating the power window switches

Check if the window lock switch is on. (→P.123)

If the window lock switch is on, the power windows other than that for the driver's seat cannot be operated.

Turn the window lock switch off.

When the jam protection function or catch protection function operates unusually and the side window cannot be opened or closed, perform the following operations with the power window switch of that door. (→P.120)

- Stop the vehicle. With the power switch in ON, within 4 seconds of the jam protection function or catch protection function activating, continuously operate the power window switch in the one-touch closing direction or one-touch opening direction so that the side window can be opened and closed.
- If the side window cannot be opened and closed even when performing the above operations, perform the procedure for function initialization. (→P.657)

Initializing the jam protection function/catch protection function

1. Turn the power switch to ON.
2. Pull and hold the power window switch in the one-touch closing direction and completely close the side window. (→P.121)
3. Release the power window switch for a moment, resume pulling the switch in the one-touch closing direction, and hold it there for approximately 6 seconds or more.
4. Press and hold the power window switch in the one-touch opening direction. After the side window is completely opened, continue holding the switch for an additional 1 second or more.
5. Release the power window switch for a moment, resume pushing the switch in the one-touch opening direction, and hold it there for approximately 4 seconds or more.
6. Pull and hold the power window switch in the one-touch closing direction again. After the side window is completely closed, continue holding the switch for a further 1 second or more.

   If you release the switch while the window is moving, start again from the beginning.

   If the window reverses and cannot be fully closed or opened, have the vehicle inspected by your Lexus dealer.

The power switch is turned off automatically

In the following situations, power will be turned off due to the automatic power off function.

- The vehicle is left in ACC or ON (the EV system is not operating) for more than 20 minutes with the shift position in P.
- The 12-volt battery is low with the shift position is in P and the power switch is in ACC or ON (the EV system is not operating).

Next time when starting the EV system, operate the EV system for approximately 5 minutes to recharge the 12-volt battery.

Do not leave the vehicle with the power switch in ACC or ON for long periods of time when the EV system is not operating.

If your vehicle overheats

The following may indicate that your vehicle is overheating.

- The high coolant temperature warning light comes on.
- A loss of EV system power is experienced. (For example, the vehicle speed does not increase.)
- **"EV System overheated Output power reduced"** is displayed on the multi-information display.
- Steam comes out from under the hood.

⚠ NOTICE



The radiator coolant is exclusive for radiator usage. Damage may occur when water or any other type of coolant is used, so never use any other fluid. When there is no "Toyota Genuine Traction Battery Coolant", immediately contact your Lexus dealer.

The high coolant temperature warning light comes on or "EV System overheated Output power reduced" is displayed on the multi-information display

⚠ WARNING

■ To prevent an accident or injury when inspecting under the hood of your vehicle

Observe the following precautions. Failure to do so may result in serious injury such as burns.

- If steam is seen coming from under the hood, do not open the hood until the steam has subsided. The motor compartment may be very hot.
- Keep hands and clothing (especially a tie, a scarf or a muffler) away from the fan. Failure to do so may cause the hands or clothing to be caught, resulting in serious injury.
- Do not loosen the coolant reservoir cap while the EV system and radiator are hot. High temperature steam or coolant could spray out.

⚠ NOTICE

■ When adding coolant

Add coolant slowly after the EV system has cooled down sufficiently. Adding cool coolant to a hot EV system too quickly can cause damage to the EV system.

■ To prevent damage to the cooling system

Observe the following precautions:

- Avoid contaminating the coolant with foreign matter (such as sand or dust, etc.).
- Do not use water or any other coolant when refilling coolant. Also, do not use any additive agents for the coolant.

1 **Stop the vehicle in a safe place and turn off the air conditioning system.**

2 **Leave the EV system operating and carefully lift the hood.**

3 **Check if the cooling fan is operating.**

If the fan is operating: Wait until the **"EV System overheated Output power reduced"** message disappears and then stop the EV system.

If the message does not disappear, call your Lexus dealer. If the fan is not operating: Stop the EV system immediately and call your Lexus dealer.

4 **After the EV system has cooled down, inspect the hoses and radiator core (radiator) for any leaks.**

If a large amount of coolant leaks, immediately contact your Lexus dealer.

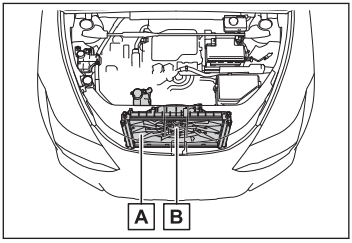

A Radiator
B Cooling fan

5 **The coolant level is satisfactory if it is between the [MAX] and [MIN] lines on the reservoir.**

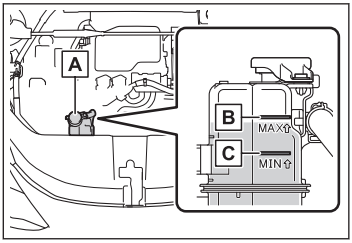

A Reservoir
B [MAX] line
C [MIN] line

6 **If the coolant is insufficient, replenish with "Toyota Genuine Traction Battery Coolant".**

If you do not have "Toyota Genuine Traction Battery Coolant", contact your Lexus dealer.

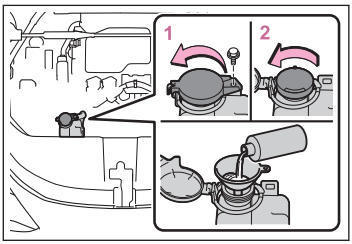

1 Remove the bolt.
2 Open the reservoir cap

Have the vehicle inspected at the nearest your Lexus dealer.

If electrical components cannot be used or do not operate when a switch is operated

If any of the electrical components do not operate, a fuse may have blown.

If this happens, check and replace the fuses as necessary. (→P.663)

If a light does not illuminate

Checking and replacing fuses

⚠ WARNING

Observe the following precautions. Failure to do so may cause damage to the vehicle, possibly leading to a fire or injury.

- Never use a fuse of a higher amperage rating than specified, or use any other object in place of a fuse.
- Always use a genuine Lexus fuse or equivalent. Never replace a fuse with a wire, even as a temporary fix.
- Do not modify the fuses or fuse boxes.
- Never check or replace the fuses in the fuse box near the inverter with converter assembly, as there are high voltage parts and wiring near the fuse box.

  Doing so may cause electric shock, resulting in death or serious injury.

⚠ NOTICE

Have the cause of electrical overload determined and repaired by your Lexus dealer as soon as possible.

1 **Turn the power switch off.**

Vehicles with Remote Air Conditioning System: Confirm that the charging connector is not connected. Also, do not use the Remote Air Conditioning System during the procedure.

2 **Open the fuse box cover.**

▶ **Motor compartment**

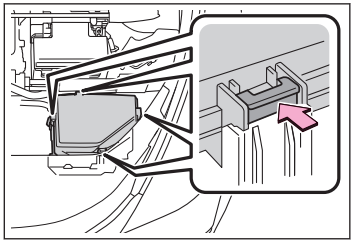

Push the tab in and lift the lid off.

▶ **Right side instrument panel**

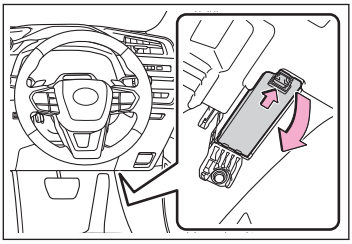

Remove the lid.

3 **Remove the fuse.**

Only type A fuse can be removed using the pull-out tool.

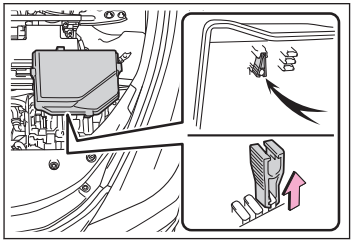

4 **Check if the fuse is blown.**

Replace the blown fuse with a new fuse of an appropriate amperage rating. The amperage rating can be found on the fuse box lid.

▶ **Type A**

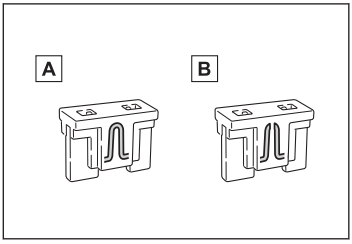

A Normal fuse
B Blown fuse

▶ **Type B**

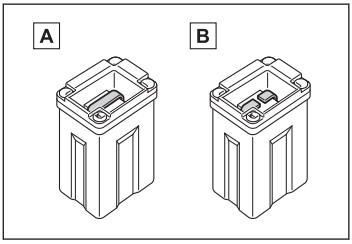

A Normal fuse
B Blown fuse

▶ **Type C**

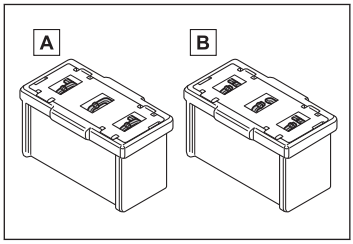

A Normal fuse
B Blown fuse

INFORMATION

■ **After a fuse is replaced**

- When installing the lid, make sure to engage the claw securely.
- If the lights do not turn on even after the fuse has been replaced, a bulb may need replacement.
- If the replaced fuse blows again, have the vehicle inspected by your Lexus dealer.

■ **If there is an overload in a circuit**

The fuses are designed to blow, protecting the wiring harness from damage.

■ **When replacing light bulbs**

Lexus recommends that you use genuine Lexus products designed for this vehicle.

Because certain bulbs are connected to circuits designed to prevent overload, non-genuine parts or parts not designed for this vehicle may be unusable.

Light bulbs

If any lights burn out, have it replaced by your Lexus dealer.

INFORMATION

■ **LED Lights**

The lights consist of a number of LEDs. If any of the LEDs burn out, take your vehicle to your Lexus dealer to have the light replaced.

■ **Condensation build-up on the inside of the lens**

Temporary condensation build-up on the inside of the headlight lens does not indicate a malfunction. Contact your Lexus dealer for more information in the following situations:

- Large drops of water have built up on the inside of the lens.
- Water has built up inside the headlight.

10 Vehicle specifications

10-1. Specifications

Maintenance data 668

10-2. Customizable features

User customization function outline..... 674

Method to change settings 675

Customizable features..... 676

10-3. Initialization

Items to initialize 692

Maintenance data

Dimensions

Overall length		4910 mm (193.3 in.)(1) 4805 mm (189.2 in.)(2)
Overall width		1895 mm (74.6 in.)
Overall height(3)		1635 mm (64.4 in.)
Wheelbase		2850 mm (112.2 in.)
Tread(3)	Front	1610 mm (63.4 in.)
	Rear	1620 mm (63.8 in.)

(1) Vehicles with towing package
(2) Vehicles without towing package
(3) Unladen vehicle

Vehicle identification

Vehicle identification number

The vehicle identification number (VIN) is the legal identifier for your vehicle. This is the primary identification number for your Lexus. It is used in registering the ownership of your vehicle.

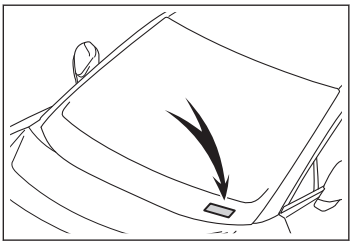

This number is stamped on the top left of the instrument panel.

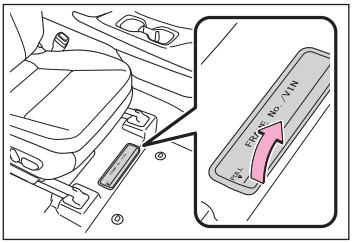

This number is also stamped under the right-hand front seat.

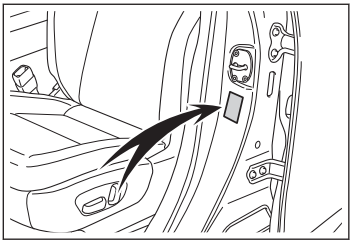

This number is also on the manufacturer's label.

■ Motor model type and motor number

The motor model type and the motor number is stamped on the motor as shown.

▶ **Front electric motor (traction motor)**

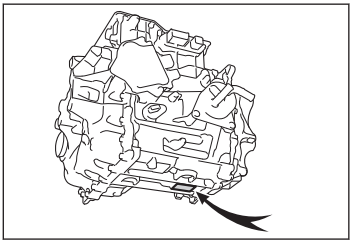

▶ **Rear electric motor (traction motor)**

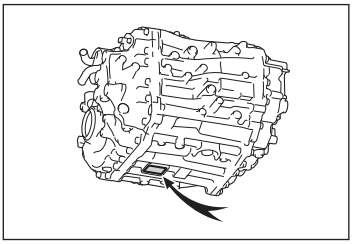

Front electric motor (traction motor)

Model	1XM
Type	Permanent magnet synchronous motor
Maximum output	150 kW
Maximum torque	266.3 N•m (27.2 kgf•m, 196.4 ft•lbf)

Rear electric motor (traction motor)

Model	1YM

Type	Permanent magnet synchronous motor
Maximum output	80 kW
Maximum torque	168.5 N•m (17.2 kgf•m, 124.3 ft•lbf)

Traction battery

Type	Lithium-ion battery
Voltage	3.7 V/cell
Capacity	201 Ah
Quantity	96 cells
Nominal voltage	355.2 V

Cooling system

Capacity(1)	7.6 L (8.0 qt., 6.7 Imp. qt.)
Coolant type	Use either of the following: ● "Toyota Genuine Traction Battery Coolant" ● Similar high-quality ethylene glycol-based, low electric conductivity coolant, non-amine and non-borate coolant with azole additives. Do not use plain water alone.

(1) The coolant capacity is a reference quantity. If replacement is necessary, contact your Lexus dealer.

⚠ NOTICE

■ Cooling system coolant

In order to ensure maximum performance of the traction battery cooling system and limit risks of battery short-circuit and other damage to your vehicle, Lexus recommends using "Toyota Genuine Traction Battery Coolant" or similar high-quality ethylene glycol-based, low electric conductivity coolant, non-amine and non-borate coolant with azole additives.



⚠ NOTICE

Lexus cannot guarantee that the use of a product other than "Toyota Genuine Traction Battery Coolant" will prevent risks of battery short circuit or other damage.

Never use water as it will cause damage.

Do not reuse coolant that has been removed from the radiator.

Heater system

Capacity(1)	4.5 L (4.8 qt., 4.0 Imp. qt.)
Coolant type	Use either of the following: ● "Toyota Super Long Life Coolant" ● Similar high-quality ethylene glycol-based non-silicate, non-amine, non-nitrite, and non-borate coolant with long-life hybrid organic acid technology Do not use plain water alone.

(1) The coolant capacity is a reference quantity. If replacement is necessary, contact your Lexus dealer.

Electrical system (12-volt battery)

Specific gravity reading at 20°C (68°F):	1.250 or higher If the specific gravity is lower than the standard value, charge the 12-volt battery.
Charging rates:	5 A max.

Front eAxle

Fluid capacity(1)	3.9 L (4.1 qt., 3.4 Imp. qt.)
Fluid type	"Toyota Genuine e-Transaxle fluid TE"

(1) The fluid capacity is a reference quantity. If replacement is necessary, contact your Lexus dealer.

NOTICE

Front eAxle fluid type

Using transaxle fluid other than the above type may cause abnormal noise or vibration, or ultimately damage the front eAxle of your vehicle.

Rear eAxle

Fluid capacity(1)	3.1 L (3.3 qt., 2.7 Imp. qt.)
Fluid type	"Toyota Genuine e-Transaxle fluid TE"

(1) The fluid capacity is a reference quantity. If replacement is necessary, contact your Lexus dealer.

NOTICE

Rear eAxle fluid type

Using transaxle fluid other than the above type may cause abnormal noise or vibration, or ultimately damage the rear eAxle of your vehicle.

Brakes

Pedal clearance(1)	62 mm (2.4 in.) Min.
Pedal free play	1 — 6 mm (0.04 — 0.24 in.)
Brake pad wear limit	1.0 mm (0.04 in.)
Parking brake indicator(2)	When pushing the parking brake switch for 1 to 4 seconds: turns off When pulling the parking brake switch for 1 to 4 seconds: comes on
Fluid type	FMVSS No. 116 DOT 3 or SAE J1703 FMVSS No. 116 DOT 4 or SAE J1704

(1) Minimum pedal clearance when depressed with a force of 300 N (30.6 kgf, 67.5 lbf) while the EV system is operating.

(2) Make sure to confirm that the brake warning light (yellow) does not illuminate. (If the brake warning light illuminates, refer to P.575.)

Steering

Free play	Less than 30 mm (1.2 in.)

Tires and wheels

▶ Vehicles with 18-inch wheels

Tire size	Front tires: 235/60R18 103H Rear tires: 255/55R18 105V
Tire inflation pressure (Recommended cold tire inflation pressure)	● Front 260 kPa (2.6 kgf/cm^2 or bar, 38 psi) ● Rear 260 kPa (2.6 kgf/cm^2 or bar, 38 psi)
Wheel size	Front wheels: 18 × 7 1/2J Rear wheels: 18 × 8J
Wheel bolt torque	140 N•m (14.3 kgf•m, 103 ft•lbf)

▶ Vehicles with 20-inch wheels

Tire size	Front tires: 235/50R20 104V Rear tires: 255/45R20 105W
Tire inflation pressure (Recommended cold tire inflation pressure)	● Front 260 kPa (2.6 kgf/cm^2 or bar, 38 psi) ● Rear 240 kPa (2.4 kgf/cm^2 or bar, 35 psi)
Wheel size	Front wheels: 20 × 8J Rear wheels: 20 × 9 1/2J
Wheel bolt torque	140 N•m (14.3 kgf•m, 103 ft•lbf)

INFORMATION

■ When towing a trailer (vehicles with towing package)

Add 20.0 kPa (0.2 kgf/cm^2 or bar, 3 psi) to the recommended tire inflation pressure, and drive at speeds below 100 km/h (62 mph).

User customization function outline

Your vehicle includes a variety of electronic features that can be personalized to suit your preferences. The settings of these features can be changed using the center display or at your Lexus dealer.

⚠ NOTICE

While performing customization, make sure that the EV system is operating, in order to prevent the 12-volt battery from becoming discharged.

Method to change settings

Changing using the center display

Set by selecting

Stop the vehicle in a place where operations can be performed safely, engage the parking brake, and change the shift position to P.

1 Select on the center display.

2 Select [Vehicle customise] or [Driving assist].

3 Select the item to change the settings of from the list.

The setting of each items can be changed. For details, see the customizable items list.

For functions that can be turned on/off, select (ON)/ (OFF).

Set by selecting

Stop the vehicle in a place where operations can be performed safely, engage the parking brake, and change the shift position to P.

1 Select on the center display.

2 Select [Vehicle customise] or [Driving assist].

3 Select the item to change the settings of from the list.

The setting of each items can be changed. For details, see the customizable items list.

Each time is selected, the setting is enabled/disabled.

When enabling is selected, the item display will be emphasized.

INFORMATION

Using the icon

Some vehicle customize settings can also be changed through the icon.

Customizable features

Some function settings are changed simultaneously with other functions being customized. Contact your Lexus dealer for further details.

A Settings that can be changed using the center display

B Settings that can be changed by your Lexus dealer

Definition of symbols: O = Available, – = Not available

Gauges, meters and multi-information display

The language, units of measure, etc. of some items displayed on the meter or multi-information display will be changed according to settings on the center display. Refer to "Multimedia Owner's Manual".

Function	Default setting	Customized setting	A	B
Meter display type(1)	Type 1	Type 2	O	–
		Type 3		
Stop light indicator	On	Off	O	–
Suggestion function(1)	On	On (when the vehicle is stopped)	O	O
		Off		

(1) This setting changes in accordance with My Settings.

Head-up Display*

Function	Default setting	Customized setting	A	B
Display(1)	On	Off	O	–
Display mode(1)	Normal	Maximum	O	–
		Minimum		

(1) This setting changes in accordance with My Settings.

*: If equipped

Steering wheel switches (vehicles with a head-up display)

Function	Default setting	Customized setting	A	B
Right steering wheel switch favorite functions(1)	Display control	Driving mode select switch	○	–
		Custom		
Left steering wheel switch favorite functions(1)	Audio	Climate	○	–
		Custom		
Switch sensor high sensitivity mode (winter glove mode)(1)	Off	On	○	–

(1) This setting changes in accordance with My Settings.

Door lock

Function	Default setting	Customized setting	A	B
Door lock switch indicator illumination time	30 seconds	60 seconds	–	○
		600 seconds		
		1200 seconds		
Inside door opener switch operation adjustment (door opening function adjustment)	Short	Mid	–	○
		Long		
Multi-information display/buzzer operation when a door opener switch inside the vehicle is operated	On	Off	–	○
Inside/outside door opener switch operating method	Unlatch while pushing switch	0.6 Seconds	–	○

Function	Default setting	Customized setting	A	B
Inside/outside door opener switch operating method	Unlatch while pushing switch	Operating from inside the cabin: 0.6 Seconds Operating from outside: Unlatch while pushing switch	–	○
		Operating from inside the cabin: Unlatch while pushing switch Operating from outside: 0.6 Seconds		
Unlocking using a mechanical key	All doors unlocked in one step	Driver's door unlocked in one step, all doors unlocked in two step	–	○
Shift position linked door locking function(1)	Off	On	○	○
Shift position linked door unlocking function(1)	Off	On	○	○
Driver's door linked door unlocking function(1)(2)	On	Off	○	○

(1) This setting changes in accordance with My Settings

(2) All doors are automatically unlocked when driver's door is opened within approximately 45 seconds after turning the power switch off.

Security

Function	Default setting	Customized setting	A	B
Intrusion sensor and tilt sensor	On	Off	○	–

Power back door

Function	Default setting	Customized setting	A	B
Back door automatic open and stop position	5	Stop at the desired position (height)(1)	O	–
		1 to 5		
Power back door operations	On	Off	O	–
Operation buzzer volume	3	1	O	–
		2		
Kick Sensor*(2)	On	Off	O	–
Kick operation buzzer*(2)	On	Off	–	O
The function that validates the  switch of the wireless remote control when locking the door	Off	On	–	O
Close & lock (walk away) function	On	Off	–	O
Hands free close & lock (walk away) function*	Off	On	–	O

(1) Configured by operating the  switch of the lower back door.

(2) When the towing hitch is installed, the kick sensor does not work

Smart entry & start system and wireless remote control

Function	Default setting	Customized setting	A	B
Operation buzzer type	Lexus buzzer	Normal buzzer	–	O
Operation buzzer volume(1)	5	Off	O	O
		1 to 7		

*: If equipped

Function	Default setting	Customized setting	A	B
Operation signal (Emergency flashers)(1)	On	Off	O	O
Time elapsed before automatic door lock function is activated if door is not opened after being unlocked(1)	30 seconds	60 seconds	–	O
		120 seconds		
Open door warning buzzer	On	Off	–	O

(1) This setting changes in accordance with My Settings.

Smart entry & start system

Function	Default setting	Customized setting	A	B
Smart entry & start system	On	Off	O	O
Smart door unlocking(1)	All the doors	Driver's door	O	O
Number of consecutive door lock operations	2 times	As many as desired	–	O
Time elapsed before unlocking all the door when gripping and holding the driver's door handle	2 seconds	Off	–	O
		1.5 seconds		
		2.5 seconds		

(1) This setting changes in accordance with My Settings.

Front passenger seat and rear seat reminder function

Function	Default setting	Customized setting	A	B
Front passenger seat and rear seat reminder function	On	Off	O	–

Wireless remote control

Function	Default setting	Customized setting	A	B
Unlocking operation(1)	All doors unlocked in one step	Driver's door unlocked in one step, all doors unlocked in two step	O	O
Panic function	On	Off	–	O
Power back door unlocking operation	Press and hold (short)	One short press	–	O
		Push twice		
		Press and hold (long)		
		Off		

(1) This setting changes in accordance with My Settings.

Driving position memory*

Function	Default setting	Customized setting	A	B
Driver's seat movement when exiting the vehicle(1)	Standard	Off	O	O
		Partial		
Steering wheel movement(1)	Tilt only	Telescopic only	O	–
		Tilt and telescopic		
		Off		

(1) This setting changes in accordance with My Settings.

Outside rear view mirrors

Function	Default setting	Customized setting	A	B
Automatic mirror folding and extending operation	Linked to the locking/unlocking of the doors	Off	–	O
		Linked to operation of the power switch		

*: If equipped

Power windows

Function	Default setting	Customized setting	A	B
Mechanical key linked operation	Off	On	–	O
Wireless remote control linked operation	Off	On	–	O

ASC (Acceleration Sound Control)

Function	Default setting	Customized setting	A	B
ASC (Acceleration Sound Control) volume	Medium	High	O	–
		Low		
		Off		

Automatic light control system

Function	Default setting	Customized setting	A	B
Light sensor sensitivity(1)	Standard	-2 to 2	O	O
Time elapsed before headlights automatically turn off after doors are closed(1)	30 seconds	Off	O	O
		60 seconds		
		90 seconds		

(1) This setting changes in accordance with My Settings

Lights

Function	Default setting	Customized setting	A	B
Welcome lighting	On	Off	–	O

Adaptive High-beam System *

Function	Customized settings	A	B
Adaptive High-beam System	ON/OFF(1)	–	O

*: If equipped

Function	Customized settings	A	B
Brightness and illuminated area adjustment of the high beams according to the vehicle speed	15 km/h / 30 km/h / 80 km/h	–	O
Intensity adjustment of the high beams when driving around a curve (illuminates the area in the direction vehicle is turning more brightly)	ON/OFF	–	O
Projection distance adjustment of the low beams according to the distance to a preceding vehicle	ON/OFF	–	O
Illumination of the cornering lights when starting off	ON/OFF	–	O
High beam light distribution control for rain	ON/OFF	–	O
Upper level high beam light distribution control	ON/OFF	–	O
Light distribution control for urban areas	ON/OFF	–	O
Multi weather light system-linked operation	ON/OFF	–	O

(1) Operating as the Automatic High Beam (→P.204)

Multi Weather Lights*

Function	Default setting	Customized setting	A	B
Multi Weather Lights	On	Off	–	O

Pre-Collision System

Function	Customized setting	A	B
Pre-Collision System	ON/OFF	O	–
Warning timing(1)	Later / Default / Earlier	O	–

(1) This setting changes in accordance with My Settings.

*: If equipped

Lane Departure Alert system

Function	Customized settings	A	B
Lane Departure Alert system(1)	ON/OFF	O	–
Alert timing(1)	Default / Earlier	O	–
Alert options(1)	Vibration / Audible	O	–

(1) This setting changes in accordance with My Settings.

Dynamic Radar Cruise Control

Function	Customized setting	A	B
Acceleration setting(1)	High / Mid / Low	O	–
Speed setting (short press)(1)	1 km/h / 5 km/h / 10 km/h or 1 mph / 5 mph / 10 mph	O	–
Speed setting (long press)(1)	1 km/h / 5 km/h / 10 km/h or 1 mph / 5 mph / 10 mph	O	–
DRCC (RSA)(1)	ON/OFF	O	–
Speed limit offset(1)	-5 to +5	O	–
Guide message(1)	ON/OFF	O	–
Curve speed reduction(1)	High / Mid / Low / OFF	O	–

(1) This setting changes in accordance with My Settings.

Road Sign Assist

Function	Customized setting	A	B
Road Sign Assist (1)	ON/OFF	O	–
Excess speed notification method(1)	None / Visual / Visual & Audible	O	–
Excess speed notification level(1)	5 km/h (3 mph) / 3 km/h (2 mph) / 1 km/h (1 mph)	O	–

(1) This setting changes in accordance with My Settings.

Driver break suggestion

Function	Customized setting	A	B
Driver break suggestion	ON/OFF	O	–

Driver monitor

Function	Customized setting	A	B
Warning function(1)	ON/OFF	O	–

(1) This setting changes in accordance with My Settings.

Lexus parking assist-sensor

Function	Customized setting	A	B
Lexus parking assist-sensor(1)	On/Off	O	–
Buzzer volume of Lexus parking assist-sensor when operating(1)(2)	Level1/Level2/Level3	O	–

(1) This setting changes in accordance with My Settings

(2) The sound volume is linked among the Lexus parking assist-sensor, RCTA, and RCD.

Parking assist volume*1

Function	Default setting	Customized setting	A	B
Parking assist volume(1)	Mid	Low	O	–
		High		

(1) This setting changes in accordance with My Settings.

BSM (Blind Spot Monitor)

Function	Customized setting	A	B
BSM (Blind Spot Monitor)	On/Off	O	–
Outside rear view mirror indicator brightness(1)	Dim/Bright	O	–

*1: Parking assist volume is a function that controls the buzzer volume of the Lexus parking assist-sensor, RCTA, and RCD all together.

Function	Customized setting	A	B
Alert timing for presence of approaching vehicle (sensitivity)(1)	Later/Default/Earlier	○	–
Buzzer warning(1)	On/Off	○	–

(1) This setting changes in accordance with My Settings (If equipped)

Safe Exit Assist

Function	Customized setting	A	B
Safe Exit Assist	On/Off	○	–
Outside rear view mirrors display(1)	On/Off	○	–
Detection sensitivity(1)	Low/Mid/High	○	–

(1) This setting changes in accordance with My Settings

RCTA (Rear Cross Traffic Alert) function

Function	Customized setting	A	B
RCTA (Rear Cross Traffic Alert)	On/Off	○	–
Buzzer volume of RCTA when operating(1)(2)	Level1/Level2/Level3	○	–

(1) This setting changes in accordance with My Settings (If equipped)

(2) The sound volume is linked among the Lexus parking assist-sensor, RCTA, and RCD.

RCD (Rear Camera Detection)

Function	Customized setting	A	B
RCD (Rear Camera Detection) function	ON/OFF	○	–

PKSB (Parking Support Brake)

Function	Customized setting	A	B
PKSB (Parking Support Brake) function(1)	ON/OFF	○	–

(1) This setting changes in accordance with My Settings.

Lexus Teammate Advanced Park*1

Function	Default setting	Customized setting	A	B
Vehicle speed during operation	Standard	Slow	○	–
		Fast		
Distance to objects	Standard	Far	○	–
Preferred parking method	Parallel	Perpendicular	○	–
Preferred parking direction	Forward	Reverse	○	–
Preferred exit direction (perpendicular)	Left	Right	○	–
Preferred exit direction (parallel)	Right	Left	○	–
Camera view when parking	Standard	Wide	○	–
Camera view when exiting	Wide	Standard	○	–
Parking path adjustment	0 (Centered)	-3 (Inward) to +3 (Outward)	○	–
Road width adjustment	Standard	Slightly narrow	○	–
		Narrow		
Park position adjustment (forward)	0 (Centered)	-3 (Rearward) to +3 (Frontward)	○	–
Park position adjustment (reverse)	0 (Centered)	-3 (Rearward) to +3 (Frontward)	○	–
Rear accessory setting	Off	10 cm (3.9 in.)	○	–
		20 cm (7.9 in.)		
		30 cm (11.8 in.)		

*: If equipped

*1: This settings can be changed on the Advanced Park guidance screen. (→P.460)

Function	Default setting	Customized setting	A	B
Rear accessory setting	Off	40 cm (15.7 in.)	O	–
Clear registered parking space	–	–	O	–

Driving mode select switch

Function	Default setting	Customized setting	A	B
Powertrain control in custom mode	Normal	Sport	O	–
		Eco		
		Range		
Steering in custom mode	Normal	Sport	O	–
Air conditioning operation in customized mode	Normal	Eco	O	–
		Range		

Automatic air conditioning system

Function	Default setting	Customized setting	A	B
Automatic switching between outside air mode and recirculated air mode when the AUTO switch is on (AUTO switch linked air mode changing)(1)	On	Off	O	O
Automatic turning on of the A/C switch when the AUTO switch is turned on (AUTO switch linked A/C switch)(1)	On	Off	O	O
Steering wheel heater temperature adjustment in AUTO mode(1)	Standard	-2 (cooler) to 2 (warmer)	O	O

Function	Default setting	Customized setting	A	B
Driver's seat seat heater/ventilator temperature adjustment in AUTO mode(1)	Standard	-2 (cooler) to 2 (warmer)	○	○
Front passenger's seat seat heater/ventilator temperature adjustment in AUTO mode(1)	Standard	-2 (cooler) to 2 (warmer)	○	○

(1) This setting changes in accordance with My Settings

Illumination

Function	Default setting	Customized setting	A	B
Time elapsed before the lights turn off(1)	15 seconds	Off	○	○
		7.5 seconds		
		30 seconds		
Operation after the power switch is turned off	On	Off	–	○
Operation when you approach the vehicle with the electronic key on your person	On	Off	–	○
Operation when the doors are unlocked	On	Off	–	○
Footwell lights	On	Off	–	○
Door-trim ornament lights, inside handle lights and center auxiliary box lights	On	Off	–	○
Time elapsed before the outer foot lights turn off(1)	15 seconds	Off	○	○
		7.5 seconds		
		30 seconds		

Function	Default setting	Customized setting	A	B
Operation of the outer foot lights when you approach the vehicle with the electronic key on your person	On	Off	–	O
Operation of the outer foot lights when the doors are unlocked	On	Off	–	O
Operation of the outer foot lights when a door is opened	On	Off	–	O
Fading out of the outer foot lights when they turn off	Long	Short	–	O
Operation of interior lights and outer foot lights after the doors are locked	On	Off	–	O
Color selection(1)*	Silky white	Custom	O	–
Brightness control(1)*	Maximum	Desired brightness	O	–

(1) This setting changes in accordance with My Settings

Charging system

Function	Default setting	Customized setting	A	B
Charging current	Max	16A	O	–
		8A		
Charging limit	Full	90%	O	–
		80%		
		70%		
		60%		
		50%		

*: If equipped

Function	Default setting	Customized setting	A	B
DC charging power	Max	125 kW	O	–
		100 kW		
		75 kW		
		50 kW		
Battery cooler	On	Off	O	–

Power switch

Function	Customized setting	A	B
ACC customization Enabling/Disabling ACC mode	On/Off	O	–

Items to initialize

Must be initialized for normal system operation after such cases as the 12-volt battery being reconnected, or maintenance being performed on the vehicle:

Item	When to initialize	Reference
Power back door	● After reconnecting or changing the 12-volt battery	→P.125
Lexus parking assist-monitor	● After reconnecting or changing the 12-volt battery	Refer to "Multimedia Owner's Manual".
Panoramic view monitor*	● After reconnecting or changing the 12-volt battery	Refer to "Multimedia Owner's Manual".
Tire pressure warning system	● When the specified tire inflation pressure has changed, such as due to carried load, etc. ● When the tire inflation pressure is changed such as when the tire size is changed.	→P.534

*: If equipped

Supplement

Accessories, spare parts and modification of your Lexus

A wide variety of non-genuine spare parts and accessories for Lexus vehicles are currently available in the market. Using these spare parts and accessories which are not genuine Lexus products may adversely affect the safety of your vehicle, even though these parts may be approved by certain authorities in your country. Toyota Motor Corporation therefore cannot accept any liability or guarantee spare parts and accessories which are not genuine Lexus products, nor for replacement or installation involving such parts.

This vehicle should not be modified with non-genuine Lexus products. Modification with non-genuine Lexus products could affect its performance, safety or durability, and may even violate governmental regulations. In addition, damage or performance problems resulting from the modification may not be covered under warranty.

Also, remodeling like this will have an effect on advanced safety equipment such as Lexus Safety System + and there is a danger that it will not work properly or the danger that it may work in situations where it should not be working.

Cyber Attack Risk

Installing electronic devices and radios increases the risk of cyber attacks through the installed parts, which may lead to unexpected accidents and leakage of personal information.

Lexus does not make any guarantees for problems caused by installing non-genuine Lexus products.

Vehicle data recording

This vehicle is equipped with sophisticated computers that record certain data regarding vehicle controls and operations.

■ Data recorded by the computers

Certain data, such as the following, is recorded depending on the operation timing and status of each function.

- Electric motor speed (traction motor speed)
- Accelerator status
- Brake status
- Vehicle speed
- Operation status of the driving assist systems

- Images from the cameras

  Your vehicle is equipped with cameras. Contact your Lexus dealer for the location of recording cameras.

The recorded data varies according to the vehicle grade level and options with which it is equipped.

These computers do not record conversations or sounds, and only record images outside of the vehicle in certain situations.

Data usage

Lexus may use the data recorded in this computer to diagnose malfunctions, conduct research and development, and improve quality.

Lexus will not disclose the recorded data to a third party except:

- With the consent of the vehicle owner or with the consent of the lessee if the vehicle is leased
- In response to an official request by the police, a court of law or a government agency
- For use by Lexus in a lawsuit
- For research purposes where the data is not tied to a specific vehicle or vehicle owner

INFORMATION

Image information recorded by the vehicle can be erased by your Lexus dealer.

The image recording function can be disabled. However, if the function is disabled, data from when systems operate will not be available.

If you wish to stop the collection of Lexus Safety System + data by the Toyota servers for the purpose of research and development and provision to individual services, contact your Lexus dealer.

Event data recorder

This vehicle is equipped with an event data recorder (EDR). The main purpose of an EDR is to record, in certain crash or near crash-like situations, such as an airbag deployment or hitting a road obstacle, data that will assist in understanding how a vehicle's systems performed. The EDR is designed to record data related to vehicle dynamics and safety systems for a short period of time, typically 30 seconds or less. However, data may not be recorded depending on the severity and type of a crash.

The EDR in this vehicle is designed to record such data as:

- How various systems in your vehicle were operating;
- How far (if at all) the driver was depressing the accelerator and/or brake pedal; and,
- How fast the vehicle was traveling.

These data can help provide a better understanding of the circumstances in which crashes and injuries occur.

NOTE: EDR data are recorded by your vehicle only if a non-trivial crash situation occurs; no data are recorded by the EDR under normal driving conditions and no personal data (e.g., name, gender, age, and crash location) are recorded. However, other parties, such as law enforcement, could combine the EDR data with the type of personally identifying data routinely acquired during a crash investigation.

To read data recorded by an EDR, special equipment is required, and access to the vehicle or the EDR is needed. In addition to the vehicle manufacturer, other parties, such as law enforcement, that have the special equipment, can read the information if they have access to the vehicle or the EDR.

- Disclosure of the EDR data

  Lexus will not disclose the data recorded in an EDR to a third party except when:

  - An agreement from the vehicle's owner (or the lessee for a leased vehicle) is obtained
  - In response to an official request by the police, a court of law or a government agency
  - For use by Lexus in a lawsuit

  However, if necessary, Lexus may:

  - Use the data for research on vehicle safety performance
  - Disclose the data to a third party for research purposes without disclosing information about the specific vehicle or vehicle owner

Precautions for installation of an RF-transmitter system

The installation of an RF-transmitter system in your vehicle could affect electronic systems such as:

- EV system
- Lexus Safety System +
- Anti-lock brake system
- SRS airbag system
- Seat belt pretensioner system

Be sure to check with your Lexus dealer for precautionary measures or special instructions regarding installation of an RF-transmitter system.

Further information regarding frequency bands, power levels, antenna positions and installation provisions for the installation of RF-transmitters, is available on request at your Lexus dealer.

High voltage parts and cables on the battery electric vehicles emit approximately the same amount of electromagnetic waves as the conventional gasoline powered vehicles or home electronic appliances despite of their electromagnetic shielding.

Unwanted noise may occur in the reception of the radio frequency transmitter (RF-transmitter).

Precautions for scrapping your Lexus

The SRS airbag and seat belt pretensioner devices in your Lexus contain explosive chemicals. If the vehicle is scrapped with the airbags and seat belt pretensioners left as they are, this may cause an accident such as fire. Be sure to have the systems of the SRS airbag and seat belt pretensioner removed and disposed of by a qualified service shop or by your Lexus dealer before you scrap your vehicle.

"QR code"

The word "QR code" is registered trademark of DENSO WAVE INCORPORATED in Japan and other countries.

Caution symbols attached to the high voltage components

High voltage components, such as the power control unit, may have labels attached indicating care required.

Each caution symbol indicates the following:

Symbols	Meanings
	Indicates danger
	Indicates high voltage part

Symbols	Meanings
	Indicates not to touch
	Indicates high temperature part

A

A/C
- Air conditioning filter 527
- Front automatic air conditioning system. 248
- Front seat concentrated airflow mode (S-Flow) 249
- My Room Mode 71

ABS (Anti-lock Brake System) 330

AC charging 51

AC charging cable
- If the AC charging connector cannot be unlocked 40
- If the charging connector cannot be unlocked 639

ACA (Active Cornering Assist) 330

ACCESSORY mode 170

Active Cornering Assist (ACA) 330

Adaptive High-beam System 200

Advanced Park 452

AHB 204

AHS 200

Air conditioning filter 527

Air conditioning system
- Air conditioning filter 527
- Defogger 216
- Front automatic air conditioning system. 248
- Front seat concentrated airflow mode (S-Flow) 249

Airbags 486
- SRS airbags 486

Alarm 106
- Warning buzzer 567

Anchor fittings 83

Antennas (smart entry & start system) 94

Anti-lock Brake System (ABS) 330
- ABS warning light 569

Approach warning 388

Automatic headlight leveling system 199

Automatic headlight leveling system (Headlight)
- Function 199

Automatic High Beam 204

Automatic light control system 196

B

Back door 125
- If the back door cannot be opened. 632

Back-up light
- Replacing light bulbs 665

Battery (12-volt battery)
- If the 12-volt battery is discharged 597
- Preparing and checking before winter 219

Battery (traction battery) 24
- Charging 51,58
- Location 24
- Traction battery cooler 42
- Traction battery heater 42

Battery Electric Vehicle driving tips 33

Brake
- Brake system warning light 567
- Fluid 672
- Regenerative braking 24

Brake assist..... **330**
Brake hold
Brake hold operated indicator..... 576
Brake Hold
Warning messages..... 581
Buzzer
Driver monitor..... 348
Buzzers
Open window warning..... 120

C

Camera
Driver monitor..... 348
Card key..... **90**
Care
Seat belts..... 508
Wheels and wheel ornaments..... 504
Catch protection function..... **120**
Center console light..... **269**
Charging..... **51,58**
AC charging..... 51
Charging components..... 36
Charging methods..... 42
Charging procedure..... 51,58
Charging schedule function..... 64
Charging time may increase..... 48
Charging tips..... 45
DC charging..... 58
Display..... 45,70,71
If the charging port lid cannot be opened..... 633
Information related to charging display.. 45,70,71
Locking and unlocking the AC charging connector..... 40
My Room Mode..... 71
Opening and closing the charging port lids..... 37
Safety functions..... 47
Things to know before charging..... 47
When charging cannot be carried out.... 634-638
Charging equipment..... **36**
Charging methods..... **42**
AC charging..... 51
DC charging..... 58
Charging port lid
If the charging port lid cannot be opened..... 633
Charging ports
Charging port lid..... 36
Locking and unlocking the AC charging connector..... 40
Opening and closing..... 37
Charging schedule function..... **64**
Setting..... 70
Charging tips..... **45**
Charging-linked functions
My Room Mode..... 42
Traction battery cooler..... 42
Traction battery heater..... 42
Traction battery warming control..... 42
Child restraint system..... **75**
Points to remember..... 75
Riding with children..... 73
Child safety..... **73**
Child restraint system..... 75

Installing child restraints....75
Power window lock switch....123
Seat belt extender precautions....150
Seat belt precautions....73
Child-protector lock....73
Cleaning
Seat belts....508
Wheels and wheel ornaments....504
Clock....304
Coolant
Checking....519,521
Cornering lights....198
Lights....198
Replacing light bulbs....665
Courtesy lights
Location....269
Cruise control....394
Dynamic radar cruise control....379
Curtain shield airbags....486
Customizable features....674

D

Daytime running light system....196
DC charging....58
Defogger
Outside rear view mirrors....218
Rear window defogger....217
Windshield....216
Digital Rear-view Mirror....155
Rear camera washer....215
Dimension....668
DIRECT4....330
Display
Charging....45,70,71
Dynamic radar cruise control....382
RCD (Rear Camera Detection)....433
Distance to empty....304,319
Do-it-yourself maintenance....513
Door
Child-protector lock....73
If a door cannot be opened....628
Smart entry & start system....94
Door courtesy lights
Location....269
Door trim ornament lights....269
Doors
Door lock switches....104
Impact detection door lock release system....102
Drive-Start Control (DSC)
Sudden start restraint control....485
Driver's and front passenger's seat belt reminder light....570
Driver's seat position memory
Memory recall function....243
Driving
Battery Electric Vehicle driving tips....33
Winter drive tips....222
Driving position memory
Memory recall function....241,243
Position memory....241
Driving time....318,324
Dynamic radar cruise control....379
Warning message....383

E

ECB (Electronically Controlled Brake System) 330

Eco heat/cool 249

EDR (Event data recorder) 694

EDSS 400

Electric motor (traction motor)

Location 24

Electric Power Steering (EPS) 330

Electric power steering system

Electric power steering system warning light 570

Electric Vehicle system features 24

Electric Vehicle system precautions 27

Electricity consumption 318,319,324

Electronic key 90

Battery-saving function 90

If the electronic key does not operate properly 595,619

Electronically Controlled Brake System (ECB) 330

Emergency brake signal 330

Emergency Driving Stop System 400

Emergency flashers

Switches 563

Emergency shut off system 565

Emergency towing 649

Emergency, in case of

A warning light turns on/flashes 567

If a warning message is displayed 577

If the battery is discharged 597

If the electronic key does not operate properly 595,619

If the EV system will not start 594,597,603-605

If the vehicle is submerged or water on the road is rising 564

If you have a flat tire 606

If your vehicle overheats 659

Stopping the vehicle in an emergency 563

Towing with a tow truck 646

Towing with another vehicle 649

Using a flatbed truck 648

EPS (Electric Power Steering) 330

EV system 24

Battery Electric Vehicle driving tips 33

Driving range 35

Electric Vehicle system precautions 27

Emergency shut off system 31,565

Features 24

How to use AC charging 51

How to use DC charging 58

If the EV system will not start 594,597,603,605

Overheating 659

Power (ignition) switch 168

Regenerative braking 24

Starting the EV system 168

Event data recorder (EDR) 694

F

FAST/ECO 249

Flat tire

Emergency tire puncture repair kit. 606

Floor mats **22**
Fluid
Brake 672
Transmission 671,672
Washer 526
Fog lights **225**
Footwell lights **269**
Front automatic air conditioning system **248**
Front fog lights **225**
Replacing light bulbs 665
Front position lights
Light switches 196
Front seats **146**
Adjustment 146
Head restraints 147
Memory recall function 241,243
Power easy access system 240
Front side marker lights
Light switch 196
Replacing light bulbs 665
Front turn signal lights (bulb type)
Replacing light bulbs 665
Fuses
Replacing 663

G

Gauges **304**
Changing the instrument panel light brightness 325
Displayed content 316
Head-up display 314
Indicators 301
Multi-information display 310,312
Warning lights 298

H

Hands Free Power Back Door **138**
Head restraints **147**
Head-up display **314**
Headlight
Cleaner 213
Replacing light bulbs 665
Headlight switch
Light switches 196
Heated steering wheel **258**
Heater coolant
Preparing and checking before winter 219
Heaters
Front automatic air conditioning system 248
Outside rear view mirrors 218
Traction battery heater 42
High mounted stoplight
Replacing light bulbs 665
Hill-start assist control **330**
Hood **517**
Open 517
Hooks
Retaining hooks (floor mat) 22
Horn **227**

I

Identification
Vehicle 668

If the 12-volt battery is discharged.....619
Ignition switch (power switch)
Changing the power switch modes..170
How to start the EV system.....168
Immobilizer system.....105
Impact detection door lock release system.....102
Indicators.....301
Charging indicator.....39
Initialization
Items to initialize.....692
Inside handle lights.....269
Inside rear view mirror.....154,155
Rear camera washer.....215
Inspection.....532
Installing a CRS to a front passenger seat.....76
Interior lights.....270

J

Jack
Lifting the vehicle with a floor jack...547
Vehicle-equipped jack.....552
Jack handle.....552
Jam protection function.....120
Power back door.....125

K

Key
If a key has been lost.....618
Keyless entry.....94
Keyless entry
Smart entry & start system.....94
Keys.....90
Electronic key.....90
If the electronic key does not operate properly.....595,619
Knee airbags.....486

L

Lane Departure Alert (LDA).....370
Lane Tracing Assist.....365
LDA (Lane Departure Alert).....370
Lever
Auxiliary catch lever.....517
Hood lock release lever.....517
Wiper lever.....212
Lexus Climate Concierge.....246
Lexus Connected Services.....496
Lexus parking assist-sensor.....415
Function.....415
Lexus parking assist-sensor OFF indicator.....575
Lexus Safety System +.....338
Dynamic radar cruise control..379,394
LDA (Lane Departure Alert).....370
LTA (Lane Tracing Assist).....365
PCS (Pre-Collision System).....351
RSA (Road Sign Assist).....376
Lexus Teammate Advanced Park.....452
License plate lights
Headlight switch.....196
Replacing light bulbs.....665
Light bulbs
Replacing.....665
Lights
Emergency flashers.....563
Fog light.....225

Headlight switch..... 196
Linked mirror function when reversing 163
Lock
Smart entry & start system..... 94
Window lock switch..... 123
Locking and unlocking the AC charging connector..... 40
LTA..... 365

M

Maintenance
Do-it-yourself maintenance..... 514
Maintenance data..... 668
Maintenance requirements..... 511
Max cool..... 249
Max heat..... 249
Memory recall function..... 241
Meter..... 304
Changing the instrument panel light brightness..... 325
Displayed content..... 316
Head-up display..... 314
Indicators..... 301
Multi-information display..... 310,312
Warning lights..... 298
Mirror
Digital Rear-view Mirror..... 155
Inside rear view mirror..... 154
Rear camera washer..... 215
Mirrors
Outside rear view mirrors..... 163
Moter compartment
Steam comes out from under the hood.. 659
Multi Weather Lights
Switch..... 224
Multi-information display..... 310,312
Charging..... 45,70,71
Dynamic radar cruise control..... 382
Operating..... 316
Warning messages..... 577
My Room Mode..... 71
Starting My Room Mode..... 71
My Settings..... 238

N

nanoe™ X..... 249

O

Odometer
Changing/resetting..... 309
Function..... 304
Opener
Hood..... 517
Outer foot lights..... 269
Outside rear view mirrors..... 163
Adjustment..... 163
Folding/extending..... 165
Heaters..... 218
RCTA function..... 425
Outside temperature..... 304
Overheating..... 659

P

Paddle shift switches 187

Panic mode 103

Parking assist sensors (Lexus parking assist-sensor) 415

Parking brake 190

Parking brake engaged warning buzzer 190

Parking brake indicator 575

Parking lights

Light switch 196

Parking Support Brake function (for rear-crossing vehicles) 447

Function 447

Parking Support Brake function (rear pedestrians) 449

Function 449

Parking Support Brake function (static objects) 442

Function 442

PCS (Pre-Collision System) 351

Function 351

PCS warning light 573

Personal lights 271

PKSB (Parking Support Brake) 438

PM2.5 removal mode 249

Power (ignition) switch

Changing the power switch modes 170

How to start the EV system 168

Power back door 125

Adjusting the open position of the back door 143

Hands Free Power Back Door 138

Jam protection function 125

Power control unit coolant

Capacity 670,671

Checking 519

Preparing and checking before winter 219

Radiator 520

Power outlets 280

Power steering (Electric power steering system) 330

Power switch

Stopping the vehicle in an emergency 563

Power windows

Door lock linked window operation 122

Jam protection function 120

Operation 121

Window lock switch 123

Pre-Collision System (PCS) 351

Function 351

R

Radar cruise control (dynamic radar cruise control) 379

Radiant heaters 259

Radiator

Overheating 659

Rain-sensing windshield wipers 212

RCD (Rear Camera Detection)

Function 432

RCTA function 425

Rear doors

If the rear doors cannot be opened from the inside 631

Rear fog lights 225

Replacing light bulbs....665

Rear passengers' seat belt reminder light....571

Rear seats....147

Head restraints....147

Rear side marker lights

Light switch....196

Replacing light bulbs....665

Rear turn signal light

Replacing light bulbs....665

Rear view mirror

Inside rear view mirror....154,155

Rear camera washer....215

Rear window defogger

Window....217

Regenerative braking....24

Replacing

Fuses....663

Light bulbs....665

Tire....551

Riding with children

12-volt battery precautions....624

Child-protector lock....73

Road Sign Assist....376

Road Sign Assist (RSA)....376

Rotary shifter....177

RSA....376

RSA (Road Sign Assist)....376

S

Seat belt reminder light....570

Seat belt reminder lights....571

Seat belts

Adjusting the height....152

Care....508

Child restraint system installation....75

Emergency Locking Retractor....152

Fastening and releasing....152

Riding with children....150

Seat belt extender....150

Seat belt pretensioners....486

Seat belt reminder light....570

Seat belt reminder lights....571

Seat heaters....259

Seat ventilators....262

Seats....146,147

Adjustment....146

Child seats/child restraint system installation....75

Head restraints....147

Memory recall function....241

Power easy access system....240

Sensor

Automatic headlight system....196

Inside rear view mirror....209

Radar sensor....409

Raindrop sensor....213

Service plug....27

Shift position

Changing the shift....178

Changing the shift range....187

Intended use of each shift position....177

Side airbags....486

Side marker lights

Light switch....196

Side turn signal lights

Replacing light bulbs....665

Smart entry & start system **94**
Antenna location 94
Battery-saving function 90
Entry functions 102,131
If the electronic key does not operate properly 619
Starting the EV system 168
Snow tires **219**
SOC (State of Charge) gauge **304**
Specifications **668**
Speedometer **304**
Starting the EV system **168**
Steering wheel **154**
Adjustment 154
Electric power steering system warning light 570
Power easy access system 240
Stop lights
Emergency brake signal 330
Stop/tail lights
Replacing light bulbs 665
Stopping the vehicle in an emergency **563**
Sun visors **208**
Switch
Horn 227
Switches
Adjustment 146
Advanced Park main switch 460
Door lock 104
Dynamic radar cruise control switch 382
Emergency flashers 563
Ignition switch 168
Lexus parking assist-sensor switch 415
Light switches 196
Meter control 316
Multi Weather Lights 224
Outside rear view mirrors 163
Paddle shift switches 187
PKSB (Parking Support Brake) switch 439
Power windows 121
RCD (Rear Camera Detection) switch 433
SYNC switch 248
Tilt and telescopic steering control switch 154
Vehicle-to-vehicle distance switch 382
VSC OFF switch 330
Washer 213,215
Window lock switch 123
SYNC
SYNC (synchronize) switch 248

T

Tachometer **304**
Tail lights
Light switch 196
The Secondary Collision Brake **330**
Theft deterrent system
Alarm 106
Immobilizer system 105
Tire
If you have a flat tire 606
Replacing the tire 551
Rotating the tires 548

Tire inflation pressure....545

Tire inflation pressure

Maintenance data....673

Tire pressure warning system....534

Registering ID codes....541

Registration of the position of each wheel....537

Selecting wheel set....543

Setting the tire pressure....538

Tire pressure warning light....571

Valves and transmitters....536

Warning messages....579

Tires

Size....673

Snow tires....219

Tool....552

Top tether anchorages....83

Towing

Towing with a tow truck....646

Towing with another vehicle....649

Trailer towing....112,119

Using a flatbed truck....648

Traction battery....24

Charging....51,58

Location....24

Specification....670

Traction battery cooler....42

Traction battery heater....42

Traction Control (TRC)....330

Trailer Sway Control....330

Trailer towing....112,119

Transmission

Downshifting restriction warning buzzer....187

Operation....177

Transmitters....536

TRC (Traction Control)....330

Trip meter

Changing/resetting....309

Function....304

V

Vehicle data recording....693

Vehicle identification number....668

Vehicle Stability Control (VSC)....330

VSC (Vehicle Stability Control)....330

W

Warning buzzer....567

Warning buzzers

Approach warning....388

Lexus parking assist-sensor....420

Open door....99

Open window....120

Warning lights....298,567

ABS warning light....569

Brake system warning light....567

Charging system warning light....568

Driver's and front passenger's seat belt reminder light....570

Driving assist information indicator..574

Dynamic radar cruise control indicator....574

Electric power steering system warning light....570

LDA indicator....574
Lexus parking assist-sensor OFF indicator....575
Low traction battery warning light....568
LTA indicator....573
Parking brake indicator....575
PCS warning light....573
Rear passengers' seat belt reminder light....571
Slip indicator....575
Tire pressure warning light....571
Warning messages....577
Washer....213,215
Adding....526
Preparing and checking before winter....219
Switches....213,215
Wheel
Replacing....551
Wheel bolt wrench....552
Wheels
Size....673
Window lock switch....123
Windows
If the windows do not open or close 657
Rear window defogger....217
Washer....213,215
Windshield wiper and washer....212,213,215
Wireless remote control....103
Battery-saving function....90
Open door warning buzzer....99
Operation signals....102

Certifications

Blind Spot Monitor



C5-052

Wireless charger

The ”Qi” logo is a trademark of the Wireless Power Consortium.

ネ Q-3

Publication No. OM46104E
Part No. 01999-46104
Printed in Japan 01-2411 I
RZ450e (豪州E)